



floridatile
MADE IN THE USA COLLECTIONS



MADE IN THE USA

LAWRENCEBURG, KY

Shop USA Products!

This catalog is a resource for those choosing to specify and purchase products proudly made in the USA. Products manufactured in the United States keep Americans working, stimulate the domestic economy, and eliminate the energy, resources, emissions, and added costs required to import these same products. With the exception of select finishes, trim, and decorative pieces in a limited number of our collections, the product lines featured in this catalog are manufactured in the United States.

For over 65 years, we have worked to deliver the most innovative and beautiful tile in the industry. This commitment has taken us from being a small, ceramic trim producer in Lakeland, Florida to a leading manufacturer of porcelain floor and wall tile across the USA.

Surrounded by thoroughbred horse farms and historic bourbon distilleries, our Advanced Manufacturing Facility and National Distribution Center are strategically located in Lawrenceburg, Kentucky. Our central location allows us easy access to more than half of the US population and major distribution routes, enabling us to fulfill orders quickly and efficiently. It also places us close to the raw materials needed to sustainably produce our world-class porcelain. Florida Tile's corporate headquarters is just 30 miles east in Lexington, Kentucky – the heart of America's picturesque Bluegrass region.

Our objective to develop the finest products while protecting environmental resources has us consistently taking the lead as innovators in the tile industry. We use pre-consumer recycled content in all product produced in Kentucky. We are proudly recognized as a Green Squared Certified Manufacturing Facility certified by UL Environment, and the first tile manufacturer to have all products GREENGUARD® certified for low VOC emissions. Producing natural, sustainable products is a key aspect of our longstanding corporate strategy.

As technologies and designs continue to evolve, so does our commitment to our customers. We believe in transparency and building long-term loyalty by creating better experiences and anticipating customers' needs. In this competitive arena, Florida Tile is unmatched in its dedication to remain a trusted source for quality, ingenuity, and superior customer care.



Florida Tile is a registered US Verified Vendor.

ALPHABETICAL INDEX

REFERENCES

WHO WE ARE	2
ALPHABETICAL INDEX	3
PRODUCT INDEX	4

COLLECTIONS

MADE IN THE USA	
AINSLIE PARK ^{HDP}	6
ALUSTR ^{HDP}	8
AVENTIS ^{HDP}	10
BAKERSFIELD	12
BERKSHIRE ^{HDP}	14
CELLAR ^{HDP}	16
CONTINENT ^{DP}	18
CRAFTSMAN ^{DP}	20
DISTILLERY ^{HDP}	22
DIVINITY ^{HDP}	24
EAST VILLAGE ^{HDP}	26
ENCHANT ^{HDP}	28
EXCURSION ^{HDP}	30
GRAVITATE ^{HDP}	32
KERALA ^{HDP}	34
LOCAL ^{HDP}	36
LOST RIVER ^{HDP}	38
MAGNOLIA ^{HDP}	40
MALTESE ^{DP}	42
MINGLE ^{HDP}	44
MODTIQUE ^{HDP}	46
NATURA ^{HDP}	48

COLLECTIONS CONT.

NY2LA ^{HDP}	50
PRECIOUS ^{HDP}	52
RELIVE ^{HDP}	54
RHYME	56
SEQUENCE ^{HDP}	58
SERENDIPITY ^{HDP}	60
TIDES ^{HDP}	62
TUSCAN VILLA ^{HDP}	64
URBAN FOUNDRY ^{HDP}	66
WESTMONT	68
QUARRY	
METROPOLITAN QUARRY	70
2CM PORCELAIN PAVERS	72
MINERAL ^{HDP}	74
NY2LA ^{HDP}	76
QUEST ^{HDP}	78
RELIVE ^{HDP}	80
SPAN ^{HDP}	82

GENERAL INFORMATION

2CM TECHNICAL DATA	84
TECHNICAL DATA	86
ICON & REFERENCE GUIDE	88
MICROBAN®	89
INTENDED USE	90
PRODUCT USE CLASSIFICATIONS	91



PRODUCT INDEX

Page	Collection Name	Body Type	Recycled Content	Shade Variation	Break Strength (lbf. avg.)	Surface Hardness (mohs)	ANSI 326.3	Water Absorption	Microban®	Rectified Tile	Cove Base	Mosaic	Bullnose	Chair Rail
------	-----------------	-----------	------------------	-----------------	----------------------------	-------------------------	------------	------------------	-----------	----------------	-----------	--------	----------	------------

MADE IN THE USA*

6	Ainslee Park ^{HDP}	g	■	V2	≥ 450	7 mohs	IW+	≤ 0.5%				■	■	
8	Alustra ^{HDP}	cb	■	V3	≥ 150	7 mohs	IW+ / ID	≤ 0.5%		■		■	■	
10	Aventis ^{HDP}	cb	■	V2	≥ 410	7 mohs	IW+	≤ 0.5%		■		■	■	
12	Bakersfield	g	■	V2	≥ 513	7 mohs	IW+	≤ 0.5%				■	■	
14	Berkshire ^{HDP}	cb	■	V2	≥ 474	7 mohs	IW / IW+	≤ 0.5%				■	■	
16	Cellar ^{HDP}	cb	■	V4	≥ 460	7 mohs	IW+	≤ 0.5%				■		
18	Continent ^{DP}	g	■	V2	≥ 365	7 mohs	IW+	≤ 0.5%			■	■	■	■
20	Craftsman ^{DP}	g	■	V2	≥ 375	7 mohs	IW / IW+	≤ 0.5%				■	■	
22	Distillery ^{HDP}	g	■	V2	≥ 350	7 mohs	IW+	≤ 0.5%				■		
24	Divinity ^{HDP}	cb	■	V3	≥ 456	7 mohs	IW+	≤ 0.5%	■	■		■	■	
26	East Village ^{HDP}	cb	■	V2	≥ 410	7 mohs	IW / IW+	≤ 0.5%	■	■		■	■	
28	Enchant ^{HDP}	g	■	V3	≥ 396	7 mohs	IW+ / ID	≤ 0.5%		■		■	■	■
30	Excursion ^{HDP}	g	■	V2	≥ 450	7 mohs	IW+	≤ 0.5%				■		
32	Gravitate ^{HDP}	g	■	V3	≥ 450	7 mohs	IW+	≤ 0.5%				■	■	
34	Kerala ^{HDP}	cb	■	V3	≥ 450	7 mohs	ID	≤ 0.5%				■		
36	Local ^{HDP}	g	■	V3	≥ 474	7 mohs	IW+	≤ 0.5%	■			■		
38	Lost River ^{HDP}	cb	■	V2	≥ 500	7 mohs	IW+	≤ 0.5%		■		■	■	
40	Magnolia ^{HDP}	cb	■	V2	≥ 510	7 mohs	IW	≤ 0.5%						
42	Maltese ^{DP}	g	■	V2	≥ 300	7 mohs	IW / IW+	≤ 0.5%				■	■	
44	Mingle ^{HDP}	g	■	V2	≥ 510	7 mohs	IW / IW+	≤ 0.5%				■	■	
46	Modtique ^{HDP}	cb	■	V2/V4	≥ 492	7 mohs	IW+	≤ 0.5%	■	■		■	■	
48	Natura ^{HDP}	cb	■	V2	≥ 493	7 mohs	IW	≤ 0.5%					■	
50	NY2LA ^{HDP}	cb	■	V2	≥ 450	7 mohs	IW+	≤ 0.5%	■	■		■	■	
52	Precious ^{HDP}	g	■	V2	≥ 440	7 mohs	IW+	≤ 0.5%		■		■	■	■
54	Relive ^{HDP}	g	■	V3	≥ 350	7 mohs	IW+	≤ 0.5%		■				
56	Rhyme	cb	■	V1	≥ 465	7 mohs	IW+	≤ 0.5%				■	■	
58	Sequence ^{HDP}	cb	■	V2	≥ 490	7 mohs	IW+	≤ 0.5%	■	■		■	■	
60	Serendipity ^{HDP}	cb	■	V2	≥ 450	7 mohs	IW+	≤ 0.5%	■	■	■	■	■	
62	Tides ^{HDP}	g	■	V2	≥ 510	7 mohs	IW / IW+	≤ 0.5%				■	■	
64	Tuscan Villa ^{HDP}	g	■	V3	≥ 253	7 mohs	IW+	≤ 0.5%				■	■	
66	Urban Foundry ^{HDP}	cb	■	V2	≥ 400	7 mohs	IW / IW+	≤ 0.5%				■	■	
68	Westmont	g	■	V2	≥ 350	7 mohs	IW+	≤ 0.5%				■	■	

PRODUCT INDEX

Page	Collection Name	Body Type	Recycled Content	Shade Variation	Break Strength (lbf. avg.)	Surface Hardness (mohs)	ANSI 326.3	Water Absorption	Microban®	Rectified Tile	Cove Base	Mosaic	Bullnose	Chair Rail
------	-----------------	-----------	------------------	-----------------	----------------------------	-------------------------	------------	------------------	-----------	----------------	-----------	--------	----------	------------

QUARRY

70	Metropolitan Quarry	q		V1	≥ 400	7 mohs	O/G	≤ 3%			■		■	
-----------	---------------------	---	--	----	-------	--------	-----	------	--	--	---	--	---	--

2CM PORCELAIN PAVERS

74	Mineral ^{HDP}	cb	■	V1 / V2	min. 2800	7 mohs	EW	≤ 0.5%						
76	NY2LA ^{HDP}	cb	■	V2	min. 2800	7 mohs	EW	≤ 0.5%						
78	Quest ^{HDP}	cb	■	V3	min. 2800	7 mohs	EW	≤ 0.5%						
80	Relive ^{HDP}	cb	■	V3	min. 2800	7 mohs	EW	≤ 0.5%						
82	Span ^{HDP}	cb	■	V2	min. 2800	7 mohs	EW	≤ 0.5%						

cb= color body

g= glazed

q= quarry

note: Results shown may not apply to all formats, colors, or finishes.

* With the exception of select finishes, trim, and decorative pieces offered in a limited number of our collections, these product lines are manufactured in the USA.

**AIN10****AIN1W** (ceramic glossy wall)
Calacatta Gold**AIN20****AIN2W** (ceramic glossy wall)
Emperor Beige**AIN30****AIN3W** (ceramic glossy wall)
Zebrino Taupe**AIN40****AIN4W** (ceramic glossy wall)
Breccia Mist

FIELD TILE FORMATS

3.75x12
8mm
(rectified)12x12
8mm
(pressed)12x24
9mm
(pressed)12.1x24.4
8.5mm
(pressed)
(ceramic glossy wall)

MOSAICS & LISTELLOS

**AIN10/M122**

Calacatta Gold 36pc

**AIN20/M122**

Emperor Beige 36pc

**AIN30/M1x6STK**

Zebrino Taupe Stack


**AIN40/M122**

Breccia Mist 36pc

**AIN55/M4x4HEX**Hexagon Mix
(Calacatta Gold & Breccia Mist)**AIN00/L2x12** (wall only)
Brass**AIN01/L2x12** (wall only)
Steel

TRIMS

**P43C9 3x12**
Bullnose**S43C9 3x12**
Bullnose
(ceramic wall)**SN4339 3x3**
Outside Corner
(ceramic)
(not available in Zebrino Taupe)

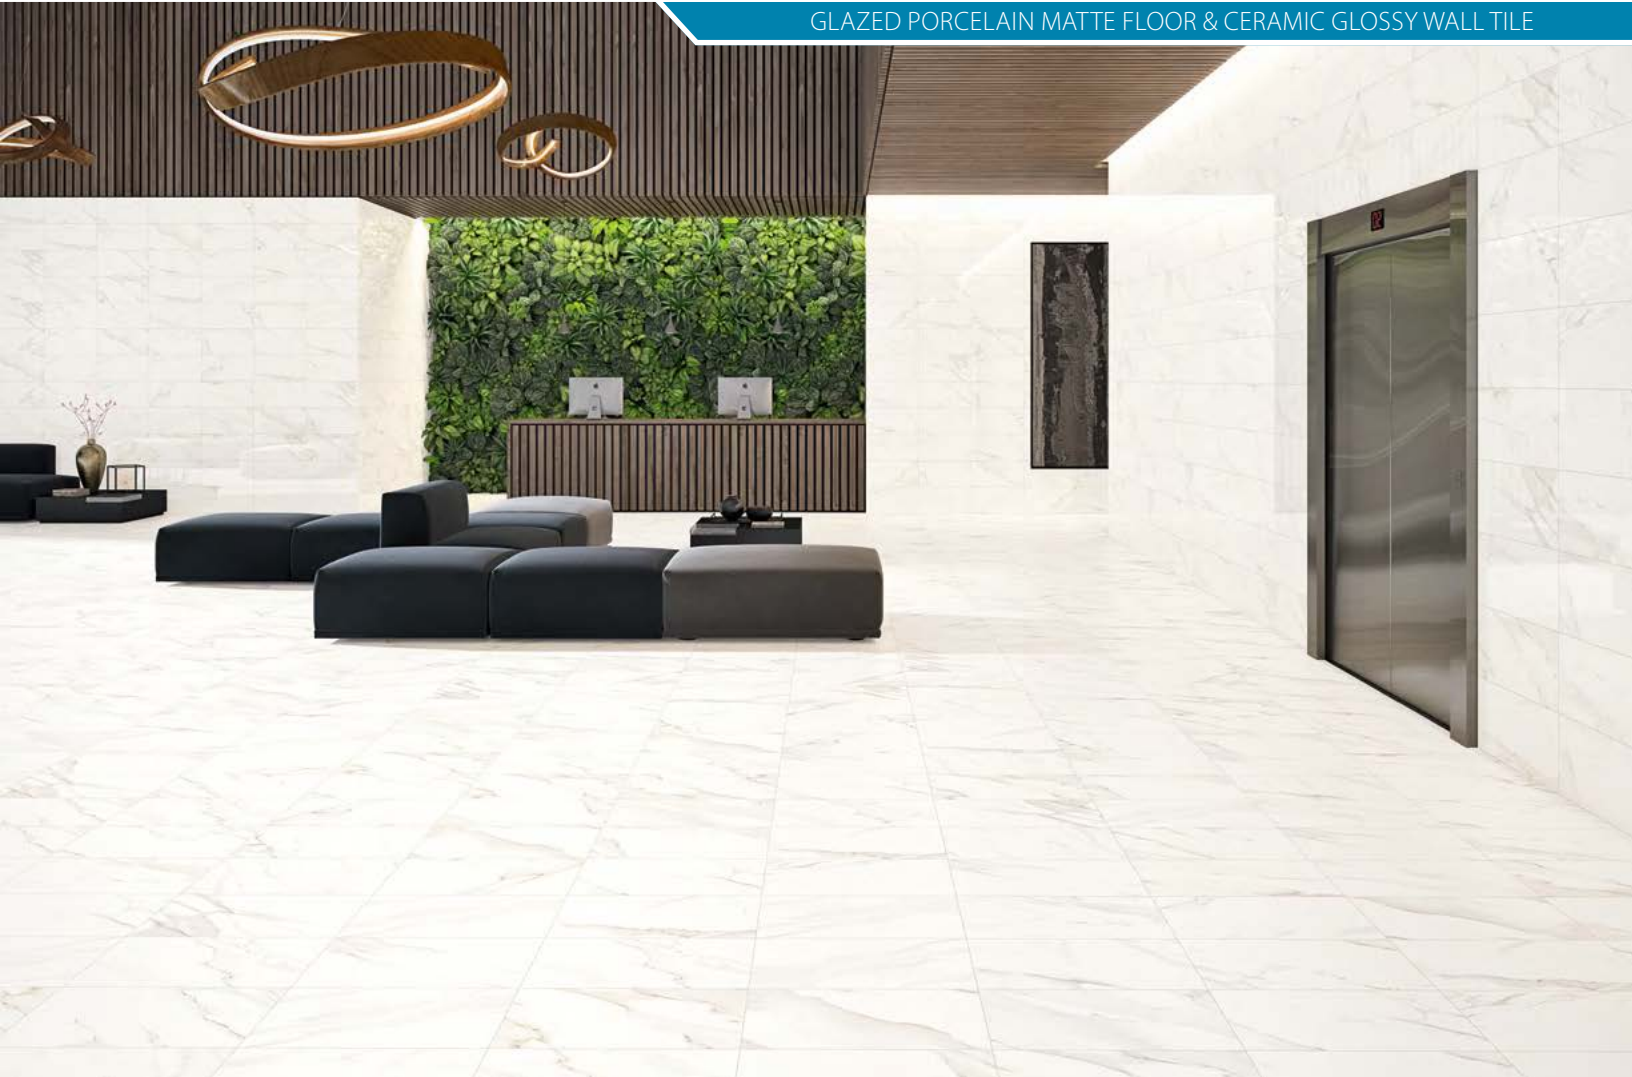

above: **AIN1W 12.1x24.4** (ceramic wall) & **AIN10 12x24** Calacatta Gold

PORCELAIN TECHNICAL DATA

Country of Origin*	USA	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 450 lbf. avg.
Surface Hardness	7 Mohs	Intended Use***	Residential, Light Commercial & Heavy Commercial
Edge	Rectified (3.75x12) All Other Formats Pressed	ANSI A326.3+	Interior, Wet Plus (IW+)
Thickness	8mm & 9mm	* Origin refers to porcelain field tile only ** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V2 - Slight Variation		

note: Product specifications are subject to change. See Technical Data Section on page 86 for details.

Ceramic wall field tile country of origin is Portugal.



ALU10 Matte
ALU10P Polished
(not shown)
Majestic White Lasa



ALU20 Matte
ALU20P Polished
(not shown)
Imperial Gold Calacatta



ALU30 Matte
ALU30P Polished
(not shown)
Opulent Beige Onyx




ALU40 Matte
ALU40P Polished
(not shown)
Sovereign Gray



ALU50 Matte
ALU50P Polished
(not shown)
Regal Black

FIELD TILE FORMATS

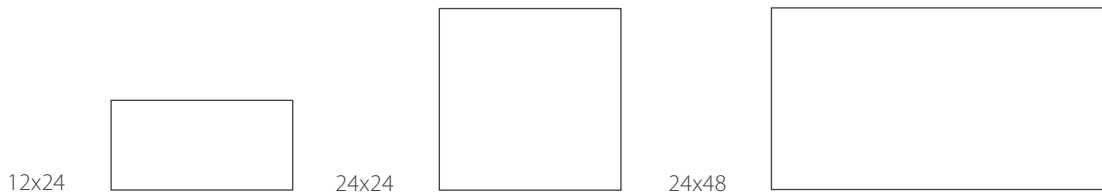

MOSAICS & LINERS




ALU10P/M4x6ARCH
Majestic White Lasa Arch
(polished only)



ALU20P/M4x6ARCH
Imperial Gold Calacatta Arch
(polished only)



ALU30P/M4x6ARCH
Opulent Beige Onyx Arch
(polished only)



ALU40P/M4x6ARCH
Sovereign Gray Arch
(polished only)



ALU50P/M4x6ARCH
Regal Black Arch
(polished only)




ALU10/M3x3HEX
ALU10P/M3x3HEX
Majestic White Lasa
Hexagon



ALU20/M3x3HEX
ALU20P/M3x3HEX
Imperial Gold Calacatta
Hexagon



ALU30/M3x3HEX
ALU30P/M3x3HEX
Opulent Beige Onyx
Hexagon



ALU40/M3x3HEX
ALU40P/M3x3HEX
Sovereign Gray
Hexagon



ALU50/M3x3HEX
ALU50P/M3x3HEX
Regal Black
Hexagon



ALU10/M2x6CHEV
ALU10P/M2x6CHEV
Majestic White Lasa
Chevron



ALU20/M2x6CHEV
ALU20P/M2x6CHEV
Imperial Gold Calacatta
Chevron



ALU30/M2x6CHEV
ALU30P/M2x6CHEV
Opulent Beige Onyx
Chevron



ALU40/M2x6CHEV
ALU40P/M2x6CHEV
Sovereign Gray
Chevron



ALU50/M2x6CHEV
ALU50P/M2x6CHEV
Regal Black
Chevron

COMING SOON⁺⁺

ALUSTRA ^{HDP}
High Definition Porcelain*

COLOR BODY PORCELAIN FLOOR & WALL TILE



above: **ALU10P/M4x6ARCH** Imperial Gold Calacatta Arch Mosaic



ALU10P/L3/4x24
Majestic White Lasa
Inlay Wall Liner Silver
(polished only)



ALU20P/L3/4x24
Imperial Gold Calacatta
Inlay Wall Liner Gold
(polished only)



ALU30P/L3/4x24
Opulent Beige Onyx
Inlay Wall Liner Gold
(polished only)



ALU40P/L3/4x24
Sovereign Gray
Inlay Wall Liner Silver
(polished only)



ALU50P/L3/4x24
Regal Black
Inlay Wall Liner Silver
(polished only)

TRIM



P43N9 3x24
Bullnose

PORCELAIN TECHNICAL DATA

Country of Origin*	USA (matte only)	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 450 lbf. avg.
Surface Hardness	7.5 Mohs	Intended Use***	Residential & Light Commercial
Edge	Rectified	ANSI A326.3⁺	Matte Interior, Wet Plus (IW+) Polished Interior, Dry (ID)
Thickness	9mm	* Origin refers to matte porcelain field tile only ** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V3 - Moderate Variation		

note: Product specifications are subject to change. See Technical Data Section on page 86 for details.

⁺⁺ Please contact customer service for product availability.





AT5
Cotton



AT3
Titanium



AT1
Ask



AT2
Velvet




AT4
Nut



AT0
Eclipse

FIELD TILE FORMATS

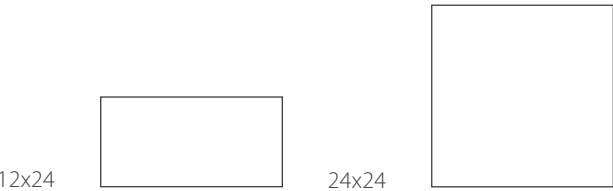

MOSAICS



AT5RA/M12
Cotton 25pc



AT3RA/M12
Titanium 25pc



AT1RA/M12
Ask 25pc



AT2RA/M12
Velvet 25pc



AT4RA/M12
Nut 25pc



AT0RA/M12
Eclipse 25pc

TRIM



P43C9 3x12
Bullnose



above: AT0RF 24x24 Eclipse

PORCELAIN TECHNICAL DATA

Country of Origin	USA	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 410 lbf. avg.
Surface Hardness	7 Mohs	Intended Use***	Residential, Light Commercial & Heavy Commercial
Edge	Rectified	ANSI A326.3+	Interior, Wet Plus (IW+)
Thickness	9mm	** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V2 - Slight Variation		

note: Product specifications are subject to change. See Technical Data Section on page 86 for details.





89204
Eggshell




89233
Wicker



89214
Pumice

FIELD TILE FORMATS




12x12

12x24

MOSAICS



89204/M12
Eggshell 25pc



89233/M12
Wicker 25pc



89214/M12
Pumice 25pc

TRIM



P43C9 3x12
Bullnose

BAKERSFIELD

GLAZED PORCELAIN FLOOR & WALL TILE



above: 89214 12x24 Pumice

PORCELAIN TECHNICAL DATA

Country of Origin	USA	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 513 lbf. avg.
Surface Hardness	7 Mohs	Intended Use***	Residential & Light Commercial
Edge	Pressed	ANSI A326.3+	Interior, Wet Plus (IW+)
Thickness	8.5mm	** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V2 - Slight Variation		

note: Product specifications are subject to change. See Technical Data Section on page 86 for details.





25525
Oak



25535
Hickory



25555
Olive




25585
Walnut



25595
Maple

FIELD TILE FORMATS



MOSAICS



25525/M12REC
Oak Parquet



25535/M12REC
Hickory Parquet



25555/M12REC
Olive Parquet




25585/M12REC
Walnut Parquet



25595/M12REC
Maple Parquet

TRIM



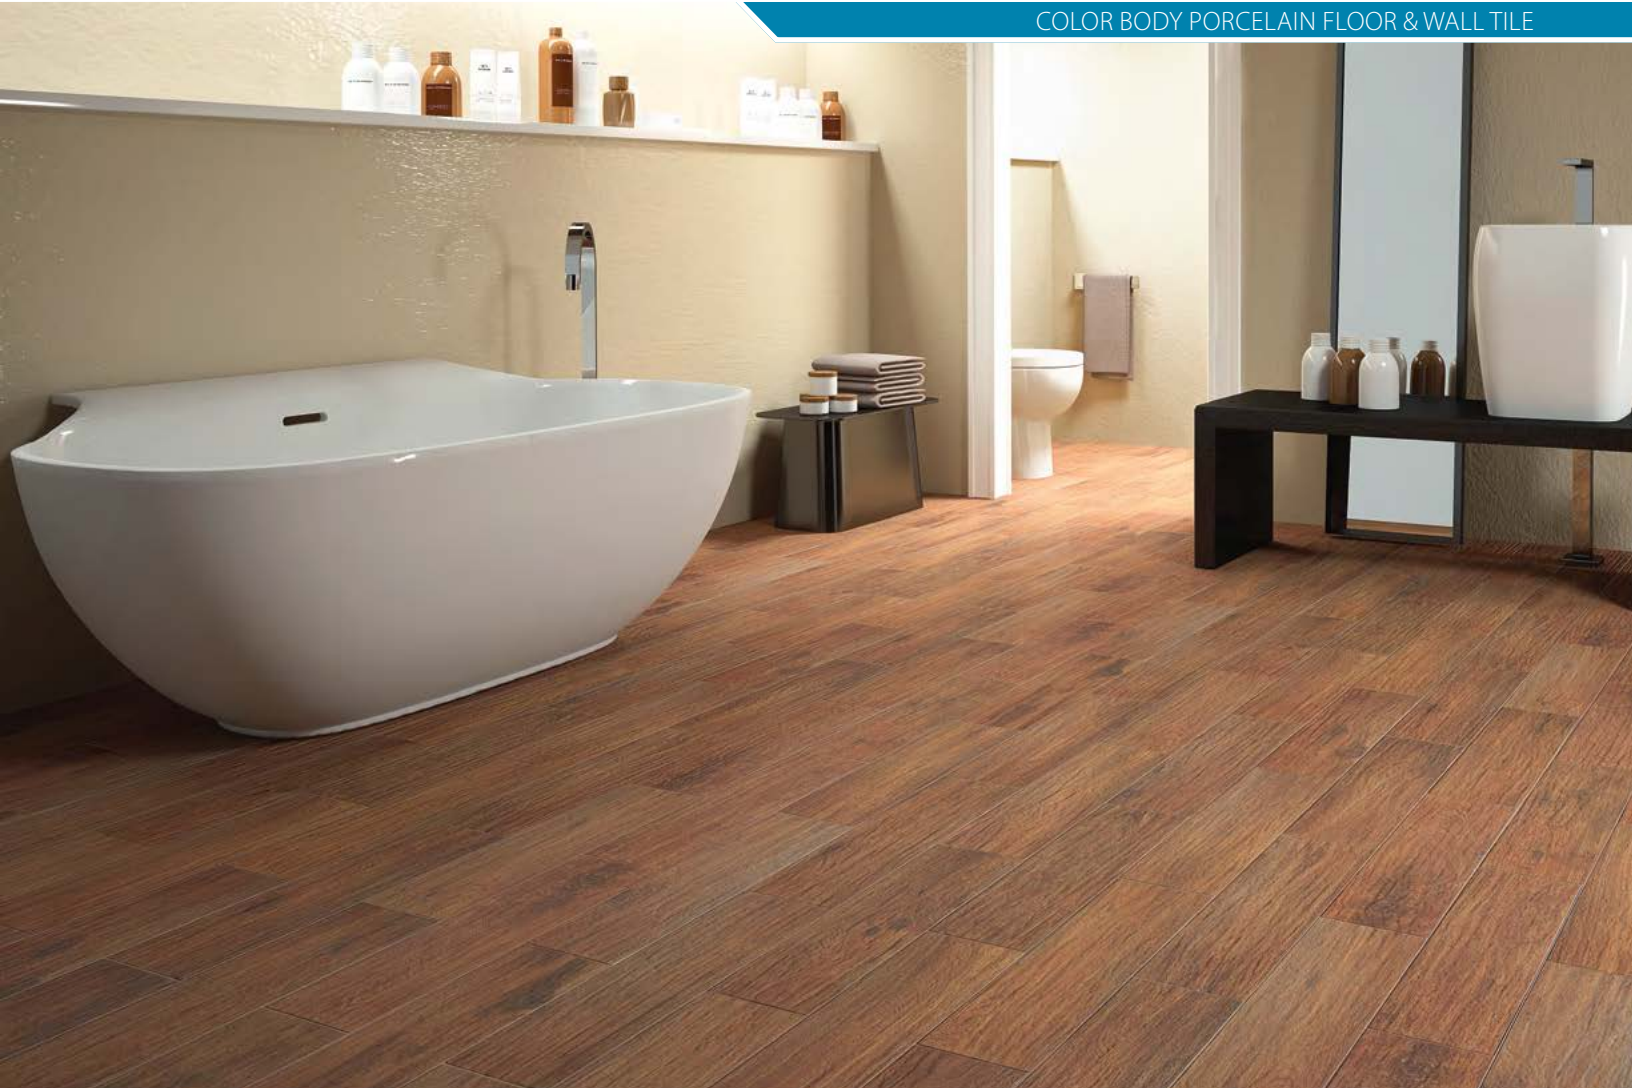

above: **25585 6x24** Walnut

PORCELAIN TECHNICAL DATA

Country of Origin	USA	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 474 lbf. avg.
Surface Hardness	7 Mohs	Intended Use***	Residential & Light Commercial
Edge	Pressed	ANSI A326.3+	Interior, Wet (IW) Mosaic Interior, Wet Plus (IW+)
Thickness	9mm	** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V2 - Slight Variation		

note: Product specifications are subject to change. See Technical Data Section on page 86 for details.






34310
Bleach



34316
Char



34327
Meld

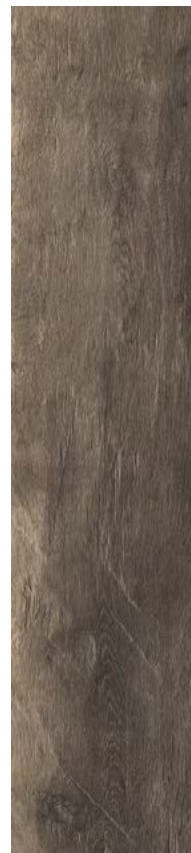

34398
Tone

FIELD TILE FORMAT

8x36



MOSAICS



34310/M2x12HER
Bleach Herringbone



34316/M2x12HER
Char Herringbone



34327/M2x12HER
Meld Herringbone



34398/M2x12HER
Tone Herringbone

trims not available



above: **34310 8x36** Bleach




34310/M1x45TK
Bleach Stack



34316/M1x45TK
Char Stack



34327/M1x45TK
Meld Stack



34398/M1x45TK
Tone Stack

PORCELAIN TECHNICAL DATA

Country of Origin	USA	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 460 lbf. avg.
Surface Hardness	7 Mohs	Intended Use***	Residential, Light Commercial & Heavy Commercial
Edge	Pressed	ANSI A326.3+	Interior, Wet Plus (IW+)
Thickness	9mm	** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V4 - Random Variation		

note: Product specifications are subject to change. See Technical Data Section on page 86 for details.

note: Each M2x12HER Herringbone Mosaic is two parts, side A and side B. This item is sold (6) pieces per carton, in sets of (3) A's and (3) B's. The total coverage per carton is 5.7 SQFT.





29914
Delta Haze



29927
Sierra Clay



29936
Coastal Sand


FIELD TILE FORMATS




MOSAICS



29914/M12
Delta Haze 25pc



29927/M12
Sierra Clay 25pc



29936/M12
Coastal Sand 25pc

CHAIR RAILS & CHAIR RAIL STOPS



29914/CR2x12
Delta Haze Chair Rail
29914/CRS2x1
Chair Rail Stop (not shown)



29927/CR2x12
Sierra Clay Chair Rail
29927/CRS2x1
Chair Rail Stop (not shown)



29936/CR2x12
Coastal Sand Chair Rail
29936/CRS2x1
Chair Rail Stop (not shown)

TRIMS



P43C9 3x12
Bullnose



P36C9 6x12
Cove Base



PB3169 6x1
Cove Base Corner



S4669 6x6
Bullnose



SN4669 6x6
Outside Corner



above: 29914 12x12 & 12x24 Delta Haze

PORCELAIN TECHNICAL DATA

Country of Origin	USA	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 365 lbf. avg.
Surface Hardness	7 Mohs	Intended Use***	Residential, Light Commercial & Heavy Commercial
Edge	Cut (6x6) Pressed (12x12 & 12x24)	ANSI A326.3+	Interior, Wet Plus (IW+)
Thickness	8mm & 9mm	** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V2 - Slight Variation		

note: Product specifications are subject to change. See Technical Data Section on page 86 for details.





27202
Biscuit




27224
Rye



27230
Wheat


FIELD TILE FORMATS

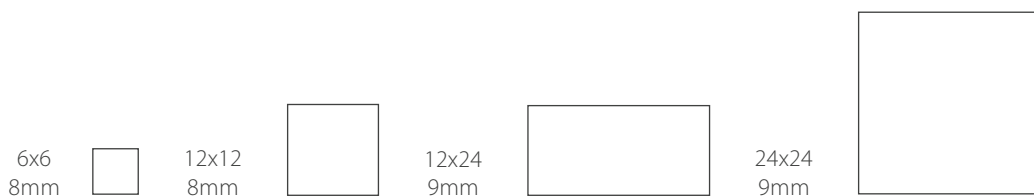

MOSAICS & LISTELLOS



27202/M12
Biscuit 25pc



27224/M12
Rye 25pc



27230/M12
Wheat 25pc



27200A/L1.5x12
Prairie Light



27200B/L1.5x12
Prairie Dark

TRIMS




P43C9 3x12
Bullnose



S4669 6x6
Bullnose



SN4669 6x6
Outside Corner

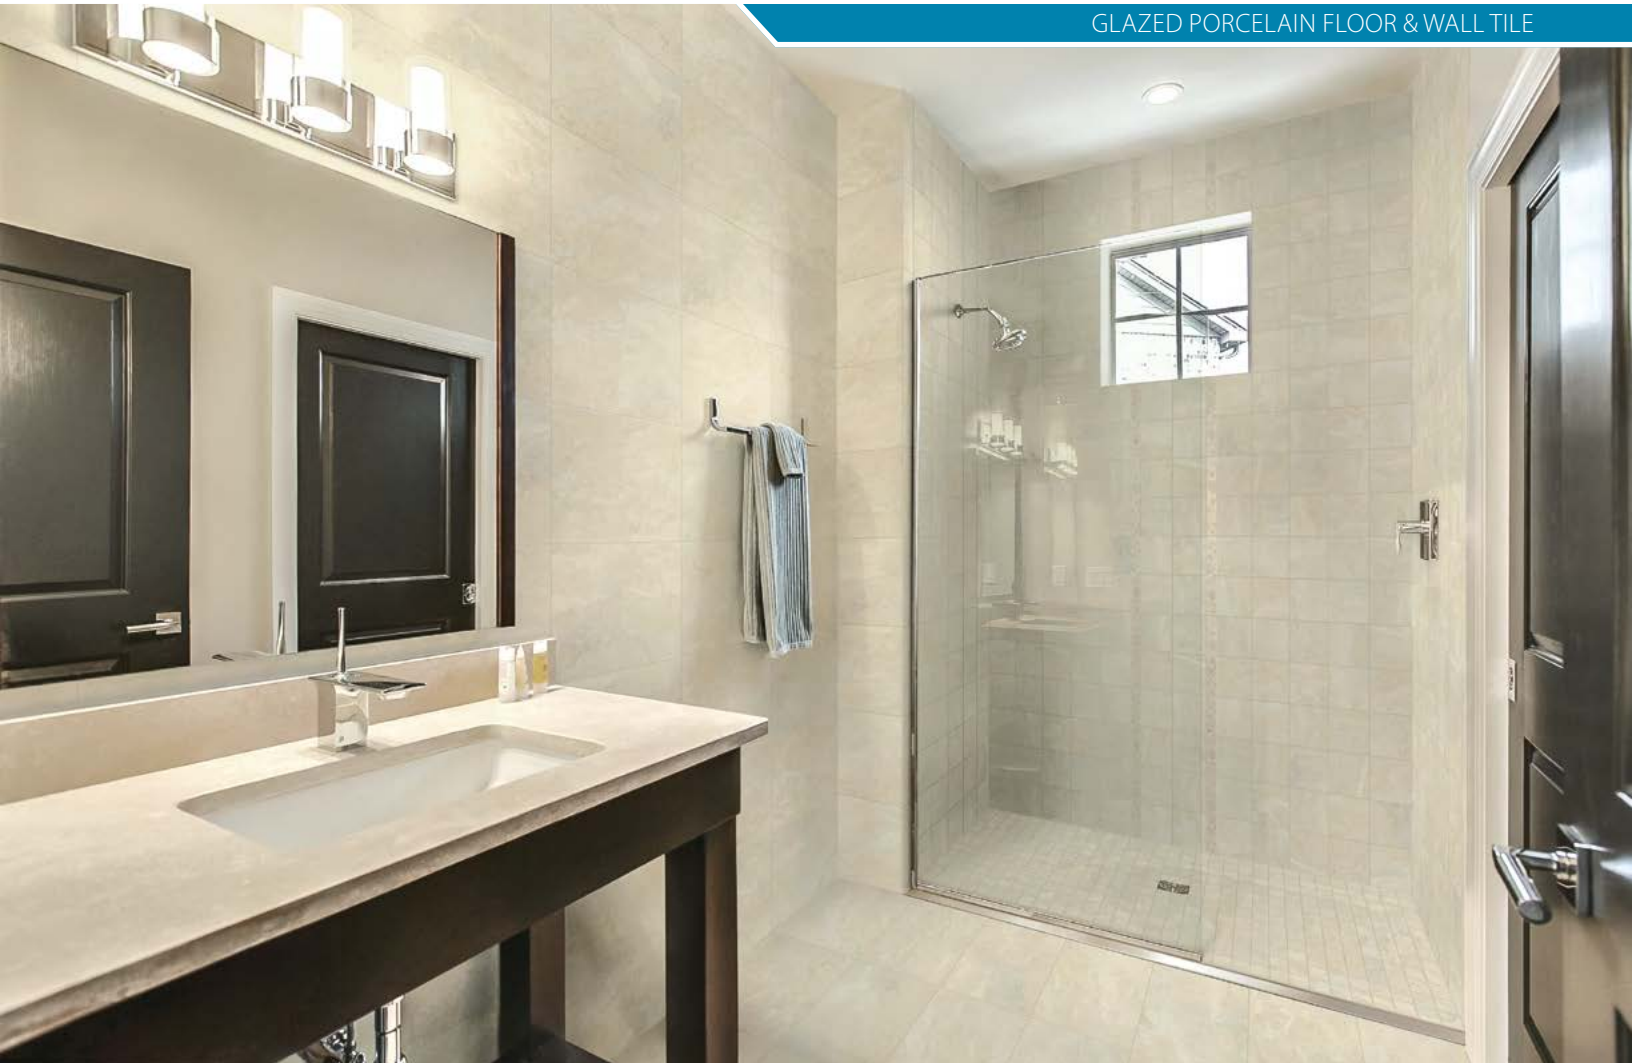

above: 27202 6x6, 12x12 Biscuit, 27202/M12 Biscuit 25pc Mosaic & 27200A/L1.5x12 Prairie Light Listello

PORCELAIN TECHNICAL DATA

Country of Origin	USA	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 375 lbf. avg.
Surface Hardness	7 Mohs	Intended Use***	Residential, Light Commercial & Heavy Commercial
Edge	Cut (6x6) Pressed (12x12, 12x24 & 24x24)	ANSI A326.3+	Interior, Wet (IW) Mosaic Interior, Wet Plus (IW+)
Thickness	8mm & 9mm	** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V2 - Slight Variation		

note: Product specifications are subject to change. See Technical Data Section on page 86 for details.



				
<div>DIS30</div> <div>Spirit</div>	<div>DIS20</div> <div>Barley</div>	<div>DIS40</div> <div>Proof</div>	<div>DIS10</div> <div>Wheat</div>	<div>DIS50</div> <div>Malt</div>


FIELD TILE FORMAT



MOSAICS

		
<div>DIS20/M10x13TWI</div> <div>Barley Twist</div>	<div>DIS65/M10x13TWI</div> <div>Twist Warm Mix (Malt & Wheat)</div>	<div>DIS75/M10x13TWI</div> <div>Twist Cool Mix (Spirit & Proof)</div>

trims not available

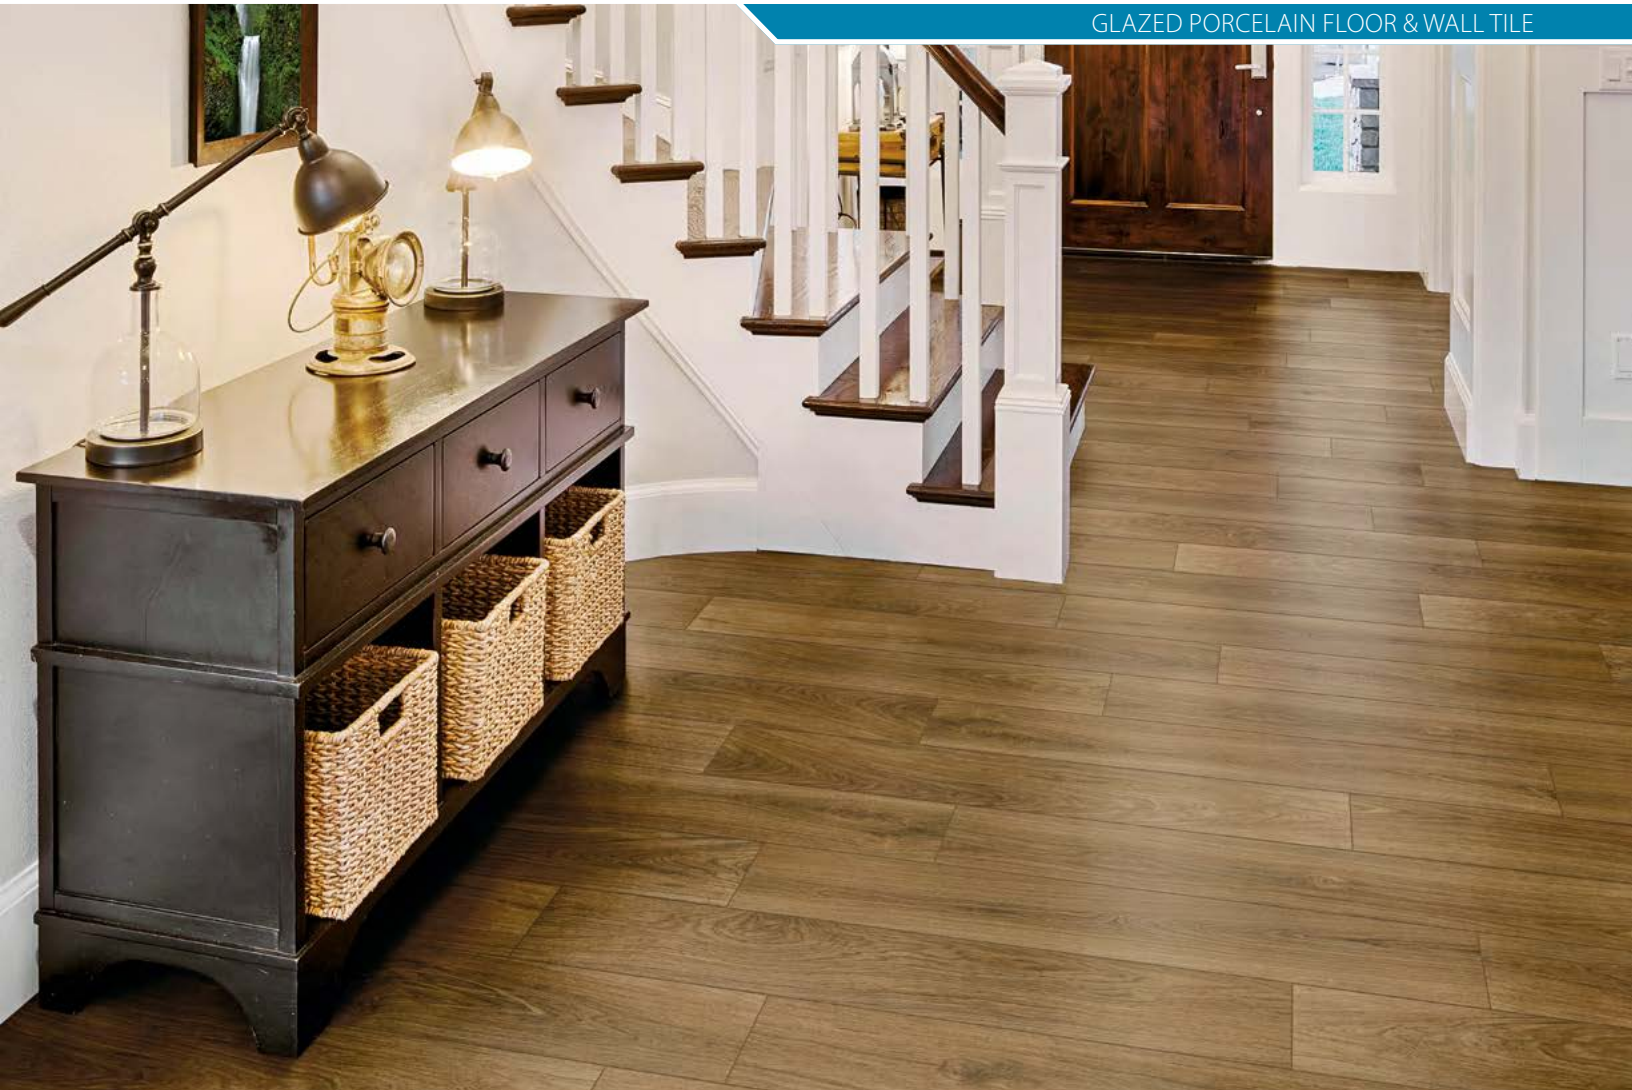

above: **DIS50 8x48 Malt**

PORCELAIN TECHNICAL DATA

Country of Origin*	USA	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 350 lbf. avg.
Surface Hardness	7 Mohs	Intended Use***	Residential, Light Commercial & Heavy Commercial
Edge	Rectified	ANSI A326.3+	Interior, Wet Plus (IW+)
Thickness	8.5mm	* Origin refers to porcelain field tile only. Country of origin is subject to change due to manufacturing efficiencies and other factors. See retailer or product packaging to verify country of origin. ** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V2 - Slight Variation		

note: Product specifications are subject to change. See Technical Data Section on page 86 for details.





DIV10
Dawn



DIV20
Horizon




DIV30
Mist



DIV40
Dusk


FIELD TILE FORMATS

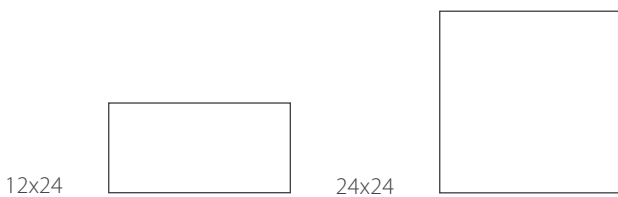


MOSAICS




DIV10/M12
Dawn 25pc



DIV20/M12
Horizon 25pc



DIV30/M12
Mist 25pc



DIV40/M12
Dusk 25pc



DIV55/M4x4HEX
Hexagon Mix
(Dawn, Horizon, Mist & Dusk)



DIV10/RSP12x24
Dawn Random Stack



DIV20/RSP12x24
Horizon Random Stack




DIV30/RSP12x24
Mist Random Stack



DIV40/RSP12x24
Dusk Random Stack

TRIM



P43N9 3x24
Bullnose



above: **DIV20 24x24** Horizon & **DIV30 12x24** Mist


PORCELAIN TECHNICAL DATA

Country of Origin	USA	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 456 lbf. avg.
Surface Hardness	7 Mohs	Intended Use***	Residential, Light Commercial & Heavy Commercial
Edge	Rectified	ANSI A326.3+	Interior, Wet Plus (IW+)
Thickness	9mm	** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V3 - Moderate Variation		

note: Product specifications are subject to change. See Technical Data Section on page 86 for details.



PLASTER



EVG10
Avenue A Gray



EVG20
E. Houston Warm Gray



EVG30
Potter's Red Clay



EVG40
Stuyvesant Charcoal



EVG50
Tompkins Blue/Black

FIELD TILE FORMATS


3.75x12




12x24



22.5x22.5¹
(waterjet-cut)




24x24



24x48




MOSAICS




EVG10/M122
Avenue A Gray 36pc




EVG20/M122
E. Houston Warm Gray 36pc



EVG30/M122
Potter's Red Clay 36pc



EVG40/M122
Stuyvesant Charcoal 36pc



EVG50/M122
Tompkins Blue/Black 36pc



EVG145M7x7HEX^{1,2}
Cool Mix
(Avenue A Gray, Stuyvesant
Charcoal & Tompkins Blue/Black)




EVG123M7x7HEX^{1,2}
Warm Mix
(Avenue A Gray, E. Houston Warm
Gray & Potter's Red Clay)

¹For specific dimensions and coverage, refer to the Technical Data Sheet on:
<https://www.floridatile.com/products/east-village/>.

²Each hexagon mix mosaic comes in patterns A, B, and C to add variation.

TRIM



P43N9 3x24
Bullnose



above: **EVG20 3.75x12 & 24x24 E. Houston Warm Gray**

PORCELAIN TECHNICAL DATA

Country of Origin	USA	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 410 lbf. avg.
Surface Hardness	7 Mohs	Intended Use***	Residential, Light Commercial & Heavy Commercial
Edge	Waterjet-Cut (22.5x22.5HEX) All Other Formats Rectified	ANSI A326.3+	Interior, Wet (IW) Mosaic Interior, Wet Plus (IW+)
Thickness	9mm	** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V2 - Slight Variation		

note: Product specifications are subject to change. See Technical Data Section on page 86 for details.





ENC10 Matte
ENC1P Polished (not shown)
Honesty



ENC20 Matte
ENC2P Polished (not shown)
Grace




ENC30 Matte
ENC3P Polished (not shown)
Beauty



ENC40 Matte
ENC4P Polished (not shown)
Charm


FIELD TILE FORMATS

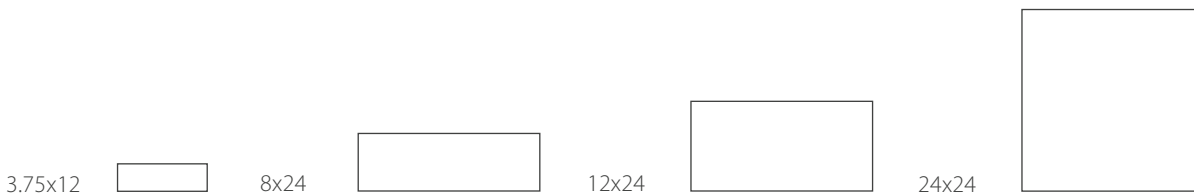

MOSAICS & LISTELLOS




ENC10/M122 Matte
Honesty 36pc



ENC20/M122 Matte
Grace 36pc



ENC30/M122 Matte
Beauty 36pc



ENC40/M122 Matte
Charm 36pc



ENC10/M3x3HEX Matte
ENC1P Polished (not shown)
Honesty Hexagon



ENC20/M3x3HEX Matte
ENC2P Polished (not shown)
Grace Hexagon



ENC30/M3x3HEX Matte
ENC3P Polished (not shown)
Beauty Hexagon



ENC40/M3x3HEX Matte
ENC4P Polished (not shown)
Charm Hexagon



ENC1G/L2.4x12 (glossy ceramic)
Honesty Ingot




ENC2G/L2.4x12 (glossy ceramic)
Grace Ingot



ENC3G/L2.4x12 (glossy ceramic)
Beauty Ingot



ENC4G/L2.4x12 (glossy ceramic)
Charm Ingot

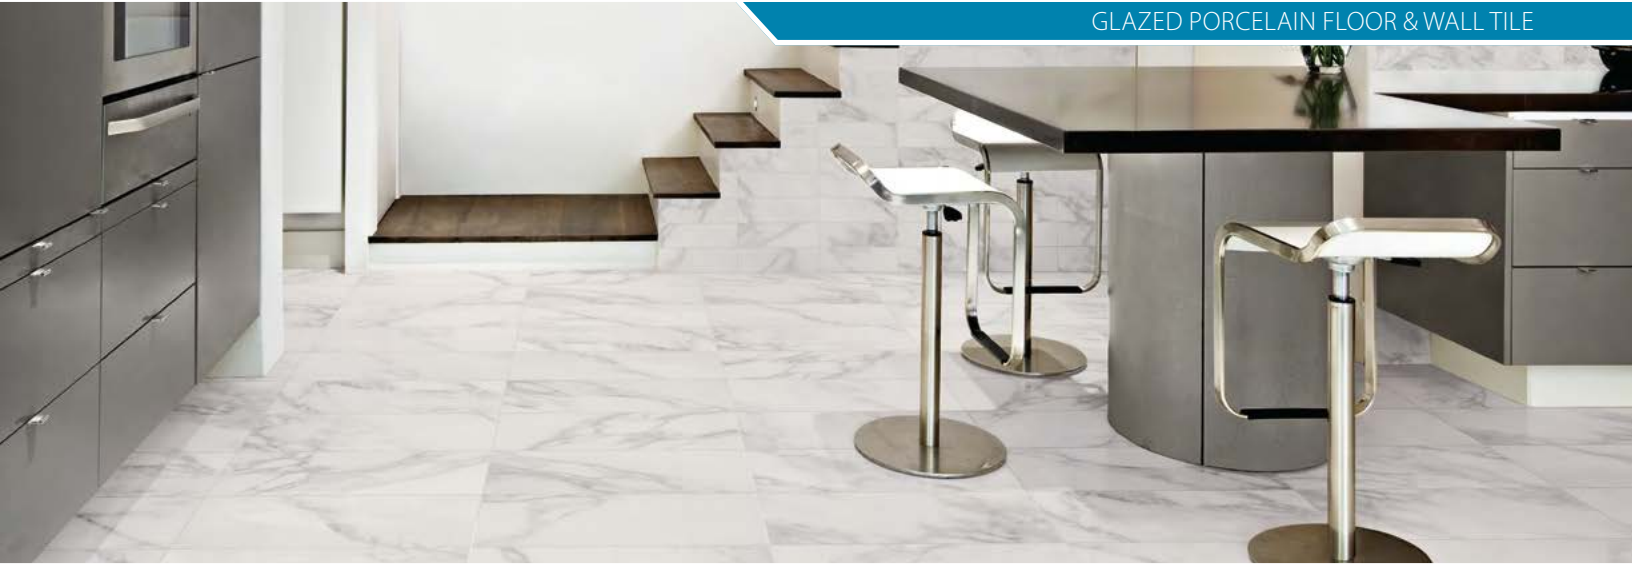

above: **ENC10 24x24 & 3.75x12** Honesty

CHAIR RAILS & CHAIR RAIL STOPS



ENC1G/CR2x12
Honesty Chair Rail
ENC1G/CRS2x1
Chair Rail Stop (not shown)
(glossy ceramic)



ENC2G/CR2x12
Grace Chair Rail
ENC2G/CRS2x1
Chair Rail Stop (not shown)
(glossy ceramic)



ENC3G/CR2x12
Beauty Chair Rail
ENC3G/CRS2x1
Chair Rail Stop (not shown)
(glossy ceramic)



ENC4G/CR2x12
Charm Chair Rail
ENC4G/CRS2x1
Chair Rail Stop (not shown)
(glossy ceramic)

TRIM



P43C9 3x12
Bullnose (matte & polished)

PORCELAIN TECHNICAL DATA

Country of Origin*	USA (matte only)	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	Matte ≥ 396 lbf. avg. Polished ≥ 600 lbf. avg.
Surface Hardness	Matte 7 Mohs Polished 6 Mohs	Intended Use***	Residential & Light Commercial
Edge	Rectified	ANSI A326.3+	Matte Interior, Wet Plus (IW+) Polished Interior, Dry (ID)
Thickness	9mm	* Origin refers to matte porcelain field tile only ** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V3 - Moderate Variation		

note: Product specifications are subject to change. See Technical Data Section on page 86 for details.

note: Polished porcelain field tile country of origin is Italy.



matte only



EXN10
Zion



EXN20
Denali



EXN30
Rainier



EXN40
Sequoia



EXN50
Badlands


FIELD TILE FORMAT



MOSAICS




EXN15/M8x8
(Zion w/ Badlands)
Parquet Mix



EXN21/M8x8
(Denali w/ Zion)
Parquet Mix



EXN34/M8x8
(Rainier w/ Sequoia)
Parquet Mix




EXN45/M8x8
(Sequoia w/ Badlands)
Parquet Mix



EXN15/M8x8
(Badlands w/ Sequoia)
Parquet Mix

trims not available

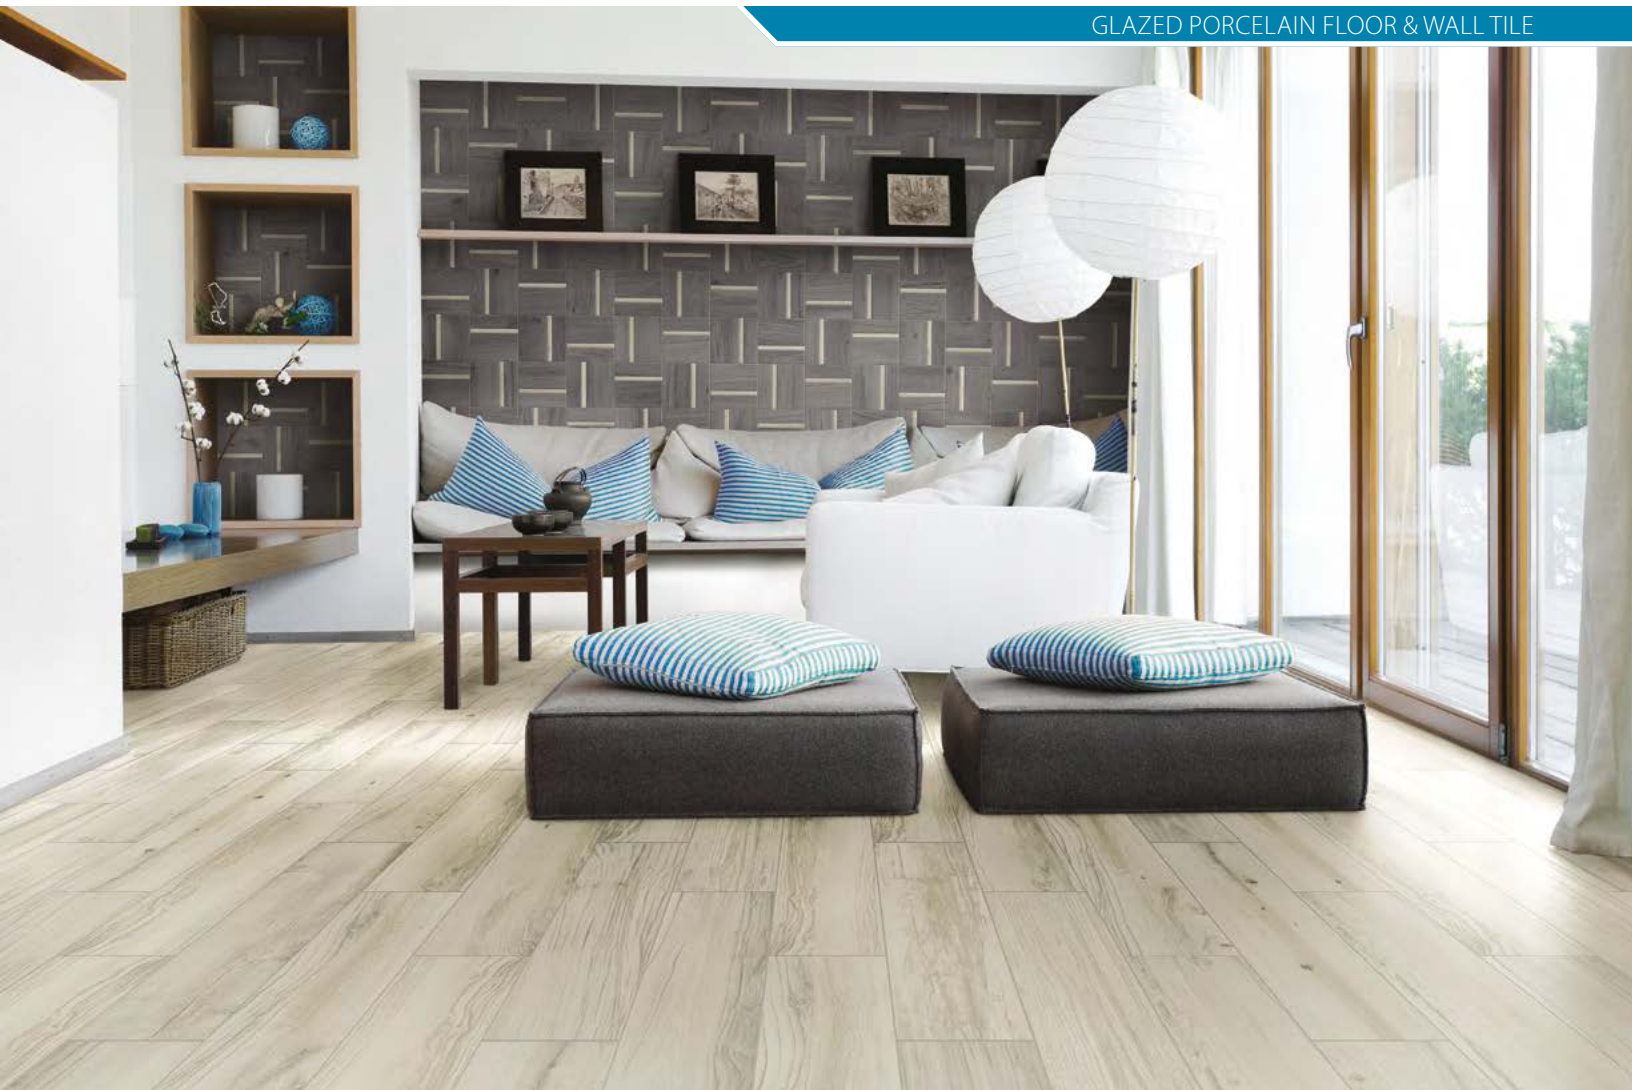

above: **EXN10 8x36** Zion & **EXN21/M8x8** Denali w/ Zion Parquet Mix Mosaic

PORCELAIN TECHNICAL DATA

Country of Origin	USA	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 450 lbf. avg.
Surface Hardness	7 Mohs	Intended Use***	Residential, Light Commercial & Heavy Commercial
Edge	Pressed	ANSI A326.3+	Interior, Wet Plus (IW+)
Thickness	9mm	** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V2 - Slight Variation		

note: Product specifications are subject to change. See Technical Data Section on page 86 for details.



TRAVERTINE



GVT10
White



GVT20
Beige



GVT30
Gray



GVT40
Natural

FIELD TILE FORMATS

12x24



MOSAICS



GVT10/M12
White 25pc



GVT20/M12
Beige 25pc



GVT30/M12
Gray 25pc



GVT40/M12
Natural 25pc



GVT10/M1x6BRICK
White Brick



GVT20/M1x6BRICK
Beige Brick



GVT30/M1x6BRICK
Gray Brick



GVT40/M1x6BRICK
Natural Brick

TRIM



P43N9 3x24
Bullnose

COMING SOON⁺⁺

GRAVITATE **HDP**
High Definition Porcelain[®]

GLAZED PORCELAIN FLOOR & WALL TILE



above: **GVT20 12x24** Beige & **EMV6S 3x12** Gratitude Dark Grey Silk

PORCELAIN TECHNICAL DATA

Country of Origin	USA	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 450 lbf. avg.
Surface Hardness	7 Mohs	Intended Use***	Residential & Light Commercial
Edge	Pressed	ANSI A326.3⁺	Interior, Wet Plus (IW+)
Thickness	9mm	** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V3 - Moderate Variation		

note: Product specifications are subject to change. See Technical Data Section on page 86 for details.

⁺⁺ Please contact customer service for product availability.





34236
Karma



34293
Mantra



34296
Nirvana

FIELD TILE FORMAT



MOSAICS



34236/M122BW
Karma 36pc Basketweave



34293/M122BW
Mantra 36pc Basketweave



34296/M122BW
Nirvana 36pc Basketweave

trims not available



above: 34296 8x36 Nirvana

PORCELAIN TECHNICAL DATA

Country of Origin	USA	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 450 lbf. avg.
Surface Hardness	7 Mohs	Intended Use***	Residential
Edge	Pressed	ANSI A326.3+	Interior, Dry (ID)
Thickness	9mm	** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V3 - Moderate Variation		

note: Product specifications are subject to change. See Technical Data Section on page 86 for details.





LCL10
Bistro



LCL20
Tavern



LCL30
Café



LCL40
Market



LCL50
Lounge

FIELD TILE FORMAT

8x36



MOSAICS



LCL123/M12CUBE
Warm Mix Cube
(Café, Bistro & Tavern)



LCL145/M12CUBE
Cool Mix Cube
(Lounge, Bistro & Market)

trims not available



above: **LCL40 8x36** Market & **LCL145/M12CUBE** Cool Mix Cube Mosaic



LCL10/M2x12HER
Bistro Herringbone



LCL20/M2x12HER
Tavern Herringbone



LCL30/M2x12HER
Café Herringbone



LCL40/M2x12HER
Market Herringbone



LCL50/M2x12HER
Lounge Herringbone

PORCELAIN TECHNICAL DATA

Country of Origin	USA	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 474 lbf. avg.
Surface Hardness	7 Mohs	Intended Use***	Residential, Light Commercial & Heavy Commercial
Edge	Pressed	ANSI A326.3+	Interior, Wet Plus (IW+)
Thickness	9mm	** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V3 - Moderate Variation		

note: Product specifications are subject to change. See Technical Data Section on page 86 for details.

note: Each M2x12HER Herringbone Mosaic is two parts, side A and side B. This item is sold (6) pieces per carton, in sets of (3) A's and (3) B's. The total coverage per carton is 5.7 SQFT.





LRV10
Cascade Beige



LRV20
Rush Gray




LRV30
Adrift Taupe



LRV40
Torrent Black

FIELD TILE FORMATS

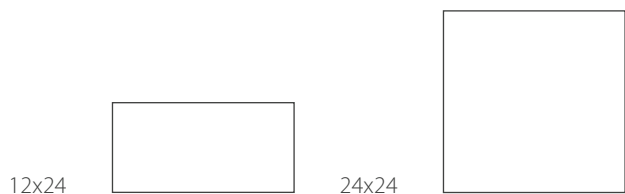

MOSAICS & LINERS




LRV10/M12
Cascade Beige 25pc



LRV20/M12
Rush Gray 25pc



LRV30/M12
Adrift Taupe 25pc



LRV40/M12
Torrent Black 25pc



LRV13/M3x3CHEV
Warm Mix Chevron
(Cascade Beige & Adrift Taupe)



LRV24/M3x3CHEV
Cool Mix Chevron
(Rush Gray & Torrent Black)



LRV50/L1/4x24
Bronze Wall Liner****



LRV60/L1/4x24
Copper Wall Liner****



LRV70/L1/4x24
Coal Wall Liner****



LRV80/L1/4x24
Silver Wall Liner****

TRIM

**** Liner substrate is aluminum. Please reference installation guide for proper application.



P43N9 3x24
Bullnose



above: **LRV10 12x24** Cascade Beige

PORCELAIN TECHNICAL DATA

Country of Origin*	USA	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 500 lbf. avg.
Surface Hardness	7 Mohs	Intended Use***	Residential, Light Commercial & Heavy Commercial
Edge	Rectified	ANSI A326.3+	Interior, Wet Plus (IW+)
Thickness	9mm	* Origin refers to porcelain field tile only ** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V2 - Slight Variation		

note: Product specifications are subject to change. See Technical Data Section on page 86 for details.



					
<div>28315</div> <div>Ash</div>	<div>28338</div> <div>Fir</div>	<div>28327</div> <div>Chestnut</div>	<div>28325</div> <div>Burl</div>	<div>28395</div> <div>Mahogany</div>	<div>28378</div> <div>Cherry</div>

FIELD TILE FORMAT





above: 28325 8x36 Burl

PORCELAIN TECHNICAL DATA

Country of Origin	USA	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 420 lbf. avg.
Surface Hardness	7 Mohs	Intended Use***	Residential & Light Commercial
Edge	Pressed	ANSI A326.3+	Interior, Wet (IW)
Thickness	9mm	** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V2 - Slight Variation		

note: Product specifications are subject to change. See Technical Data Section on page 86 for details.






29622
Porto Cream



29615
Roman Gray

FIELD TILE FORMATS



MOSAICS



29622/M12
Porto Cream 25pc



29615/M12
Roman Gray 25pc

TRIM



P43C9 3x12
Bullnose



above: **29615 12x24** Roman Gray

PORCELAIN TECHNICAL DATA

Country of Origin	USA	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 300 lbf. avg.
Surface Hardness	7 Mohs	Intended Use***	Residential & Light Commercial
Edge	Pressed	ANSI A326.3+	Interior, Wet (IW) Mosaics Interior, Wet Plus (IW+)
Thickness	8mm & 9mm	** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V2 - Slight Variation		

note: Product specifications are subject to change. See Technical Data Section on page 86 for details.



TRAVERTINE



28412
Cool Summer Mix



28430
Warm Winter Mix



28434
Soft Rock



28460
Dry Stream

FIELD TILE FORMAT

12x24



MOSAICS



28412/M12
Cool Summer Mix 25pc



28430/M12
Warm Winter Mix 25pc




28434/M12
Soft Rock 25pc



28460/M12
Dry Stream 25pc

TRIM



P43C9 3x12
Bullnose



above: **28430 12x24** Warm Winter Mix

PORCELAIN TECHNICAL DATA

Country of Origin	USA	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 510 lbf. avg.
Surface Hardness	7 Mohs	Intended Use***	Residential & Light Commercial
Edge	Pressed	ANSI A326.3+	Interior, Wet (IW) Mosaics Interior, Wet Plus (IW+)
Thickness	10mm	** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V2 - Slight Variation		

note: Product specifications are subject to change. See Technical Data Section on page 86 for details.





MTQ10
Loft



MTQ10 D12x24
Loft Deco



MTQ20
Chateau



MTQ20 D12x24
Chateau Deco



MTQ30
Salon




MTQ30 D12x24
Salon Deco



MTQ40
Estate



FIELD TILE FORMATS

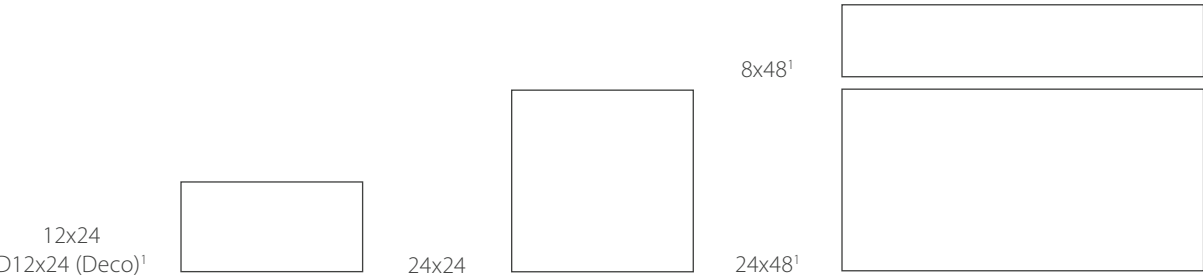


MOSAICS



MTQ10/M12
Loft 25pc



MTQ20/M12
Chateau 25pc



MTQ30/M12
Salon 25pc



MTQ40/M12
Estate 25pc



MTQ10/M2.5CIR
Loft 30pc Circle



MTQ20/M2.5CIR
Chateau 30pc Circle



MTQ30/M2.5CIR
Salon 30pc Circle



MTQ40/M2.5CIR
Estate 30pc Circle

¹Not available in Estate.



MTQ10/RSP12x24
Loft Random Stack
(with deco)



MTQ20/RSP12x24
Chateau Random Stack
(with deco)



MTQ30/RSP12x24
Salon Random Stack
(with deco)



MTQ40/RSP12x24
Estate Random Stack Mosaic

TRIM



P43N9 3x24
Bullnose

PORCELAIN TECHNICAL DATA

Country of Origin*	USA	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 492 lbf. avg.
Surface Hardness	7 Mohs	Intended Use***	Residential, Light Commercial & Heavy Commercial
Edge	Rectified	ANSI A326.3+	Interior, Wet Plus (IW+)
Thickness	9mm	* Limited production of 8x48 and 24x48 are produced in Italy. Check packaging for country of origin. ** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V3 - Loft, Chateau & Salon V4 - Estate		

note: Product specifications are subject to change. See Technical Data Section on page 86 for details.

Each RSP12x24 Random Stack Mosaic (with deco) is two parts, side A and side B. This item is sold (4) pieces per carton, in sets of (2) A's and (2) B's. The total coverage per carton is 7.84 SQFT.



USA only



						
28004 Wilmington White	28034 Hampton Blonde	28092 Charleston Brown	28088 Cayman Red	28013 Nantucket Gray	28060 Newport Blue	28017 Cape Cod Charcoal

FIELD TILE FORMAT



TRIM





above: **28088 6x24** Cayman Red

PORCELAIN TECHNICAL DATA

Country of Origin	USA	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 493 lbf. avg.
Surface Hardness	7 Mohs	Intended Use***	Residential, Light Commercial & Heavy Commercial
Edge	Pressed	ANSI A326.3+	Interior, Wet (IW)
Thickness	9mm	** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V2 - Slight Variation		

note: Product specifications are subject to change. See Technical Data Section on page 86 for details.






NY210
Malibu White



NY220
Brentwood Beige



NY250
Tribeca Taupe



NY230
Riverside Steel




NY260
Gramercy Gray




NY240
Chelsea Black

FIELD TILE FORMATS

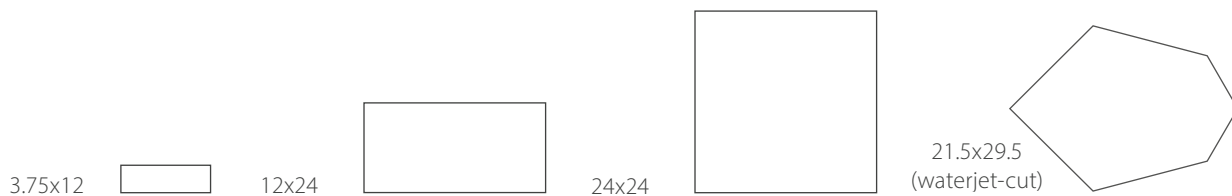

MOSAICS



NY210/M122
Malibu White 36pc




NY220/M122
Brentwood Beige 36pc




NY250/M122
Tribeca Taupe 36pc



NY230/M122
Riverside Steel 36pc



NY260/M122
Gramercy Gray 36pc



NY240/M122
Chelsea Black 36pc




NY275/M12POLY
Warm Mix Polygon
(Malibu White, Brentwood Beige & Tribeca Taupe)




NY285/M12POLY
Cool Mix Polygon
(Riverside Steel, Gramercy Gray & Chelsea Black)

TRIM



P43N9 3x24
Bullnose

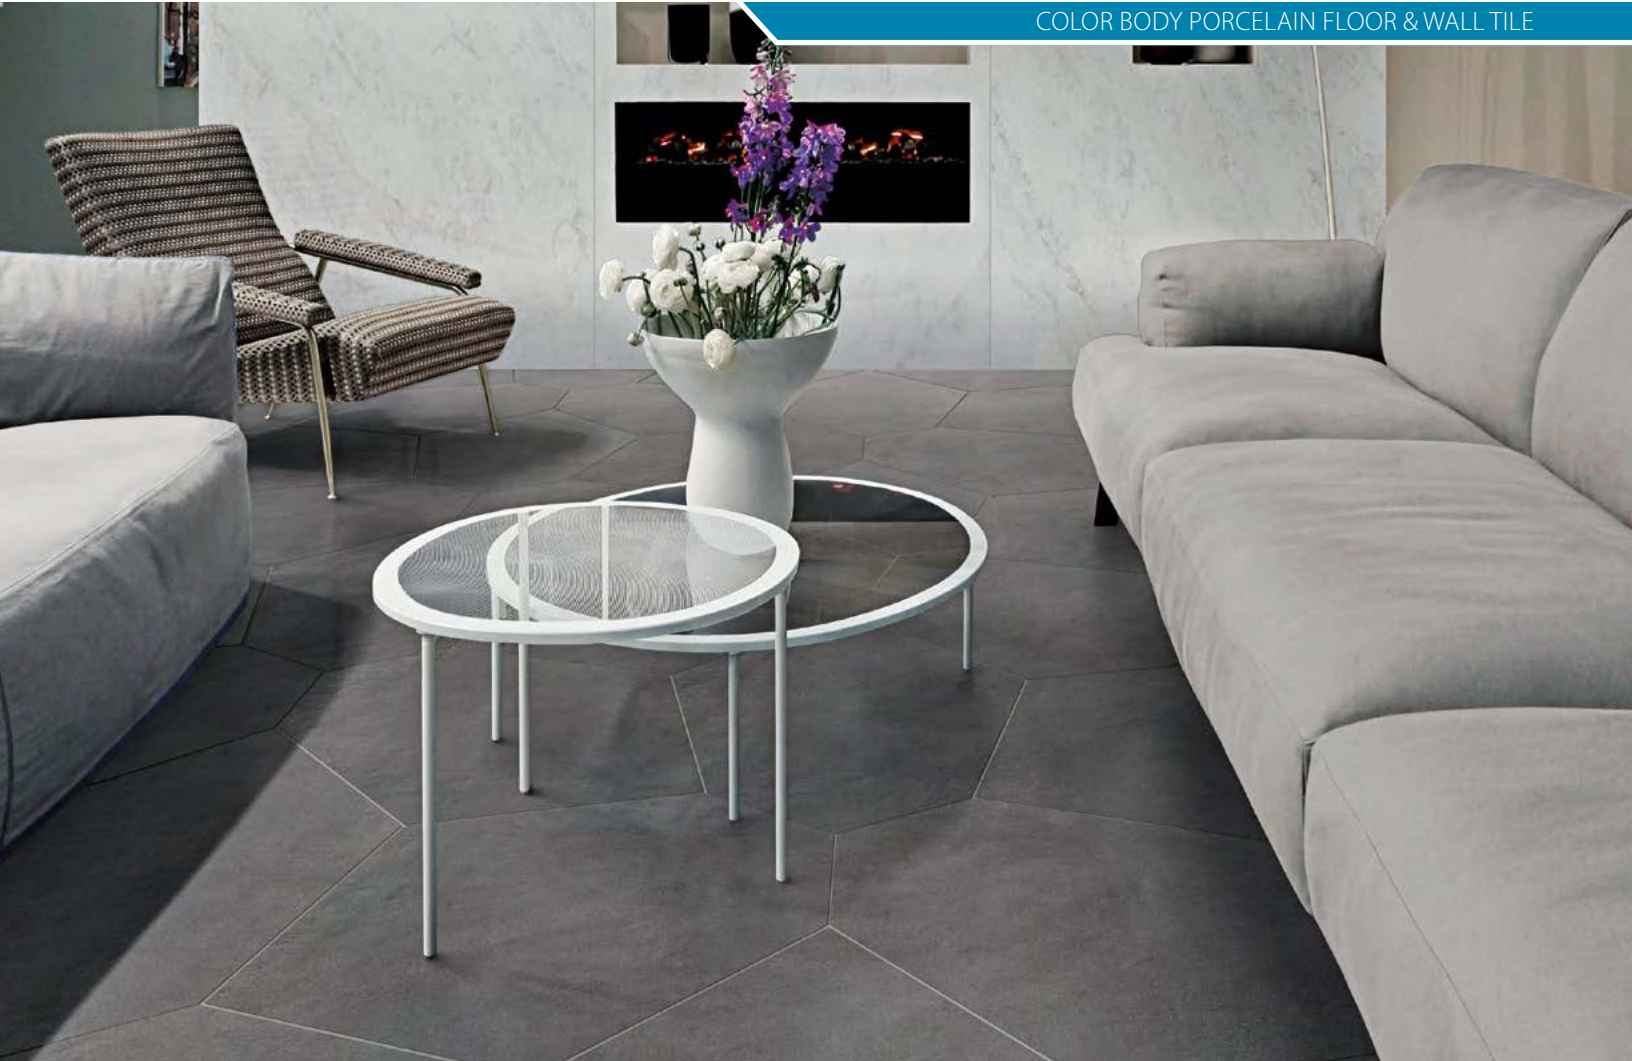

above: **NY240 21.5x29.5** (waterjet-cut) Chelsea Black

PORCELAIN TECHNICAL DATA

Country of Origin	USA	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 450 lbf. avg.
Surface Hardness	7 Mohs	Intended Use***	Residential, Light Commercial & Heavy Commercial
Edge	Waterjet-Cut (21.5x29.5) All Other Formats Rectified	ANSI A326.3+	Interior, Wet Plus (IW+)
Thickness	9mm	** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V2 - Slight Variation		

note: Product specifications are subject to change. See Technical Data Section on page 86 for details.



35001 12x24
35001 24x24
35001 24x48
 Calacatta
 (porcelain floor & wall)



B639.0113.0951 5x14
B629.0128.0951 14x27
B635.0078.0951 14x39
(35001)
 Calacatta
 (ceramic wall)




B629.0131.0011
(35001D) 14x27
 Calacatta Curl Deco
 (ceramic wall)

FIELD TILE FORMATS


12x24
 10mm
 (matte)



24x24
 10mm
 (matte)



24x48
 9mm
 (matte)



5x14
 10.5mm
 (ceramic wall)
 (glossy)



14x27
 9.5mm,
 9.5-9.8mm deco
 (ceramic wall)
 (glossy)



14x39
 10mm
 (ceramic wall)
 (glossy)



MOSAICS



35001/M1x4HER
 Calacatta Herringbone
 (porcelain floor & wall)
 (matte)



663.0092.0011
(35001)/M12HEX
 Calacatta Hexagon
 (ceramic wall)
 (matte & glossy mix)

CHAIR RAIL & CHAIR RAIL STOP



750.0011.0011 (35001) CR1.7x14
 Calacatta Chair Rail
758.0031.0011 (35001) CRS1.7x1
 Chair Rail Stop (not shown)



above: **35001 24x24** Calacatta & **635.0078.0951 (35001) 14x39** Calacatta (ceramic wall)

TRIMS



P43C9 3x12

Bullnose



S43E9 3x14

Bullnose
(ceramic wall)



SN4339 3x3

Outside Corner
(ceramic wall)

PORCELAIN TECHNICAL DATA

Country of Origin*	USA	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 440 lbf. avg.
Surface Hardness	7 Mohs	Intended Use***	Residential & Light Commercial
Edge	Cut (5x14) All other formats Rectified	ANSI A326.3+	Interior, Wet Plus (IW+)
Thickness	10mm (12x24 & 24x24) 9mm (24x48)	* Origin refers to porcelain field tile only. Country of origin is subject to change due to manufacturing efficiencies and other factors. See retailer or product packaging to verify country of origin. ** Average production value *** See page 90 for more specific details +See page 91 for more specific details	
Shade Variation	V2 - Slight Variation		

note: Product specifications are subject to change. See Technical Data Section on page 86 for details.

note: Ceramic wall tile country of origin is Portugal.



porcelain only



porcelain only





34112
Alaska



34132
Florida



34123
Oregon



34193
Montana

FIELD TILE FORMAT






above: **34193 8x48** Montana

PORCELAIN TECHNICAL DATA

Country of Origin*	USA	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 350 lbf. avg.
Surface Hardness	7 Mohs	Intended Use***	Residential, Light Commercial & Heavy Commercial
Edge	Rectified	ANSI A326.3+	Interior, Wet Plus (IW+)
Thickness	9mm	* Origin refers to porcelain field tile only. Country of origin is subject to change due to manufacturing efficiencies and other factors. See retailer or product packaging to verify country of origin. ** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V3 - Moderate Variation		

note: Product specifications are subject to change. See Technical Data Section on page 86 for details.





28503
Ivory Staccato



28513
Silver Melody



28522
Almond Note



28532
Desert Harmony



28593
Stone Chamber

FIELD TILE FORMATS


3.75x12
(rectified)




12x24
(pressed)




MOSAICS




28503/M1x6
Ivory Staccato Bar



28513/M1x6
Silver Melody Bar




28522/M1x6
Almond Note Bar




28532/M1x6
Desert Harmony Bar



28593/M1x6
Stone Chamber Bar



28500A/M12ROMA
Soprano Roman
(Ivory Staccato, Almond Note &
Silver Melody)



28500B/M12ROMA
Alto Roman
(Silver Melody, Almond Note &
Ivory Staccato)



28500C/M12ROMA
Tenor Roman
(Stone Chamber, Desert Harmony &
Almond Note)

TRIM



P43C9 3x12
Bullnose



above: **28513 12x24** Silver Melody

PORCELAIN TECHNICAL DATA


Country of Origin	USA	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 465 lbf. avg.
Surface Hardness	7 Mohs	Intended Use***	Residential, Light Commercial & Heavy Commercial
Edge	Rectified (3.75x12) Pressed (12x24)	ANSI A326.3+	Interior, Wet Plus (IW+)
Thickness	9mm	** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V1 - Uniform Appearance		

note: Product specifications are subject to change. See Technical Data Section on page 86 for details.






34901
Breeze



34938
Drift




34915
Current



34905
Vortex
(not available in 8x48 & 24x48)

FIELD TILE FORMATS

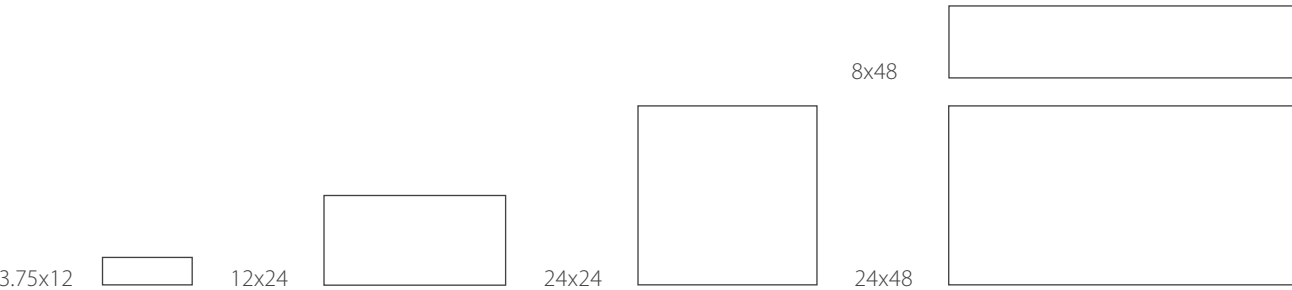

MOSAICS



34901/M1x3HER
Breeze Herringbone



34938/M1x3HER
Drift Herringbone



34915/M1x3HER
Current Herringbone



34905/M1x3HER
Vortex Herringbone



34901/M4x4HEX
Breeze Hexagon



34938/M4x4HEX
Drift Hexagon



34915/M4x4HEX
Current Hexagon



34905/M4x4HEX
Vortex Hexagon

TRIM



P43N9 3x24
Bullnose




above: 34901 12x24 Breeze

PORCELAIN TECHNICAL DATA

Country of Origin	USA	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 490 lbf. avg.
Surface Hardness	7 Mohs	Intended Use***	Residential, Light Commercial & Heavy Commercial
Edge	Rectified	ANSI A326.3+	Interior, Wet Plus (IW+)
Thickness	9mm	** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V2 - Slight Variation		

note: Product specifications are subject to change. See Technical Data Section on page 86 for details.





SDP10
Fortune White



SDP20
Spontaneous Beige




SDP30
Infinite Cool Gray



SDP40
Fate Warm Gray




SDP60
Intuition Tobacco




SDP70
Destiny Black


FIELD TILE FORMATS

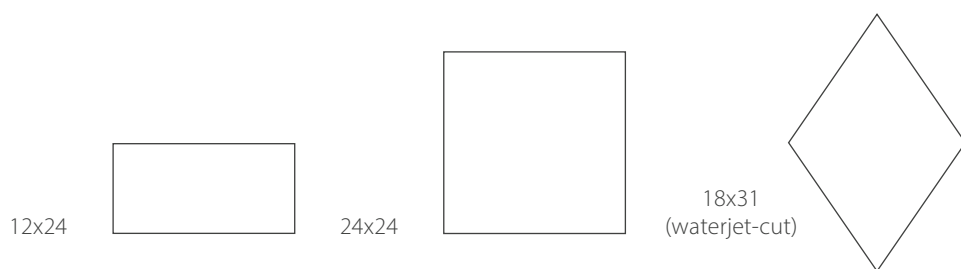


MOSAICS




SDP10
Fortune White 36pc



SDP20
Spontaneous Beige 36pc




SDP30
Infinite Cool Gray 36pc



SDP40
Fate Warm Gray 36pc



SDP60
Intuition Tobacco 36pc



SDP70
Destiny Black 36pc




SDP126/M2x4TRI
Warm Mix
(Fortune White, Spontaneous Beige &
Intuition Tobacco)



SDP347/M2x4TRI
Cool Mix
(Infinite Cool Gray, Fate Warm Gray &
Destiny Black)

TRIM




P43N9 3x24
Bullnose



P36C9 6x12
Cove Base



PB3169 6x1
Cove Base Corner

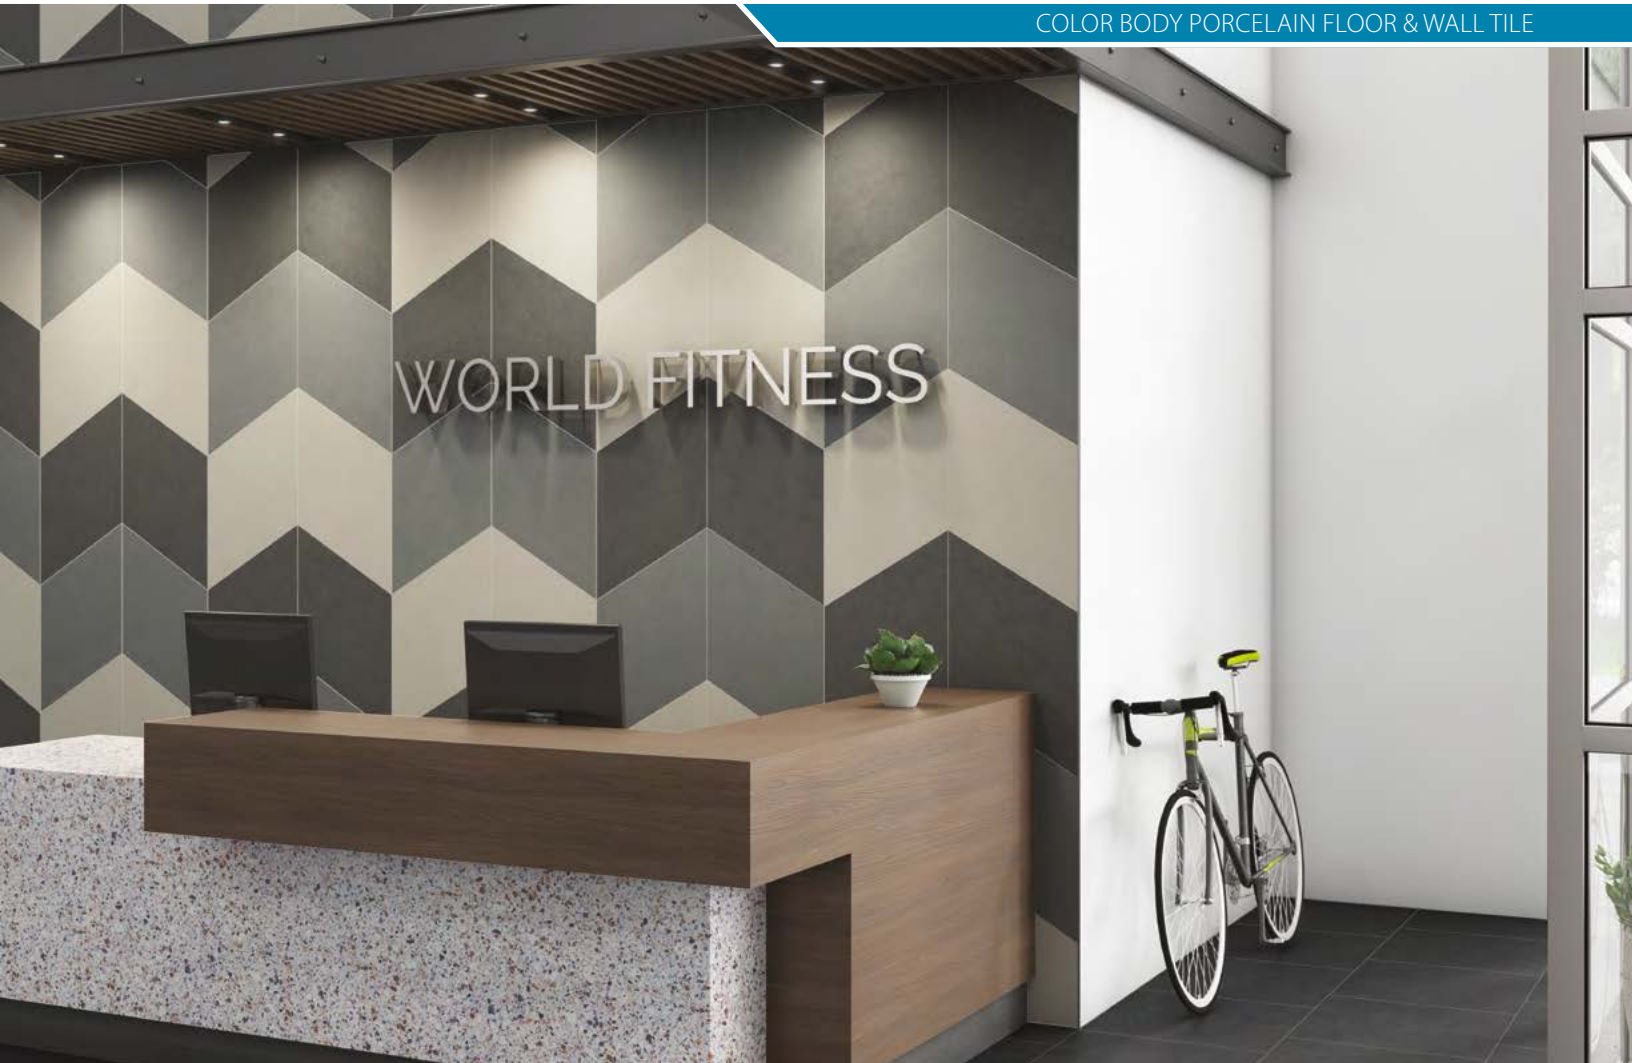

above: **SPD30 18x31** Infinite Cool Gray, **SDP40 18x31** Fate Warm Gray, **SDP70 12x24 & 18x31** Destiny Black

PORCELAIN TECHNICAL DATA

Country of Origin	USA	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 450 lbf. avg.
Surface Hardness	7 Mohs	Intended Use***	Residential, Light Commercial & Heavy Commercial
Edge	Waterjet-Cut (18x31Diamond) All Other Formats Rectified	ANSI A326.3+	Interior, Wet Plus (IW+)
Thickness	9mm	** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V2 - Slight Variation		

note: Product specifications are subject to change. See Technical Data Section on page 86 for details.



TRAVERTINE



28110
Sea Salt



28115
Marine Fog



28130
Sand Castle



28190
Coconut Shell



28155
Waters Edge

FIELD TILE FORMATS

3.75x12
(rectified)



12x24
(pressed)



MOSAICS



28110/M12
Sea Salt 25pc



28115/M12
Marine Fog 25pc



28130/M12
Sand Castle 25pc



28190/M12
Coconut Shell 25pc



28155/M12
Waters Edge 25pc

TRIM



P43N9 3x24
Bullnose



above: 28110 12x24 Sea Salt

PORCELAIN TECHNICAL DATA

Country of Origin	USA	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 510 lbf. avg.
Surface Hardness	7 Mohs	Intended Use***	Residential & Light Commercial
Edge	Rectified (3.75x12) Pressed (12x24)	ANSI A326.3+	Interior, Wet (IW) Mosaics Interior, Wet Plus (IW+)
Thickness	10mm	** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V2 - Slight Variation		

note: Product specifications are subject to change. See Technical Data Section on page 86 for details.



TRAVERTINE



TUV10
Arezzo Ivory



TUV20
Cortona Beige



TUV30
Florence Silver

FIELD TILE FORMATS

6x6
8mm
(cut)




12x12
8mm
(pressed)



12x24
9mm
(pressed)



MOSAICS



TUV10/M122
Arezzo Ivory 36pc



TUV20/M122
Cortona Beige 36pc




TUV30/M122
Florence Silver 36pc

TRIM



P43C9 3x12
Bullnose

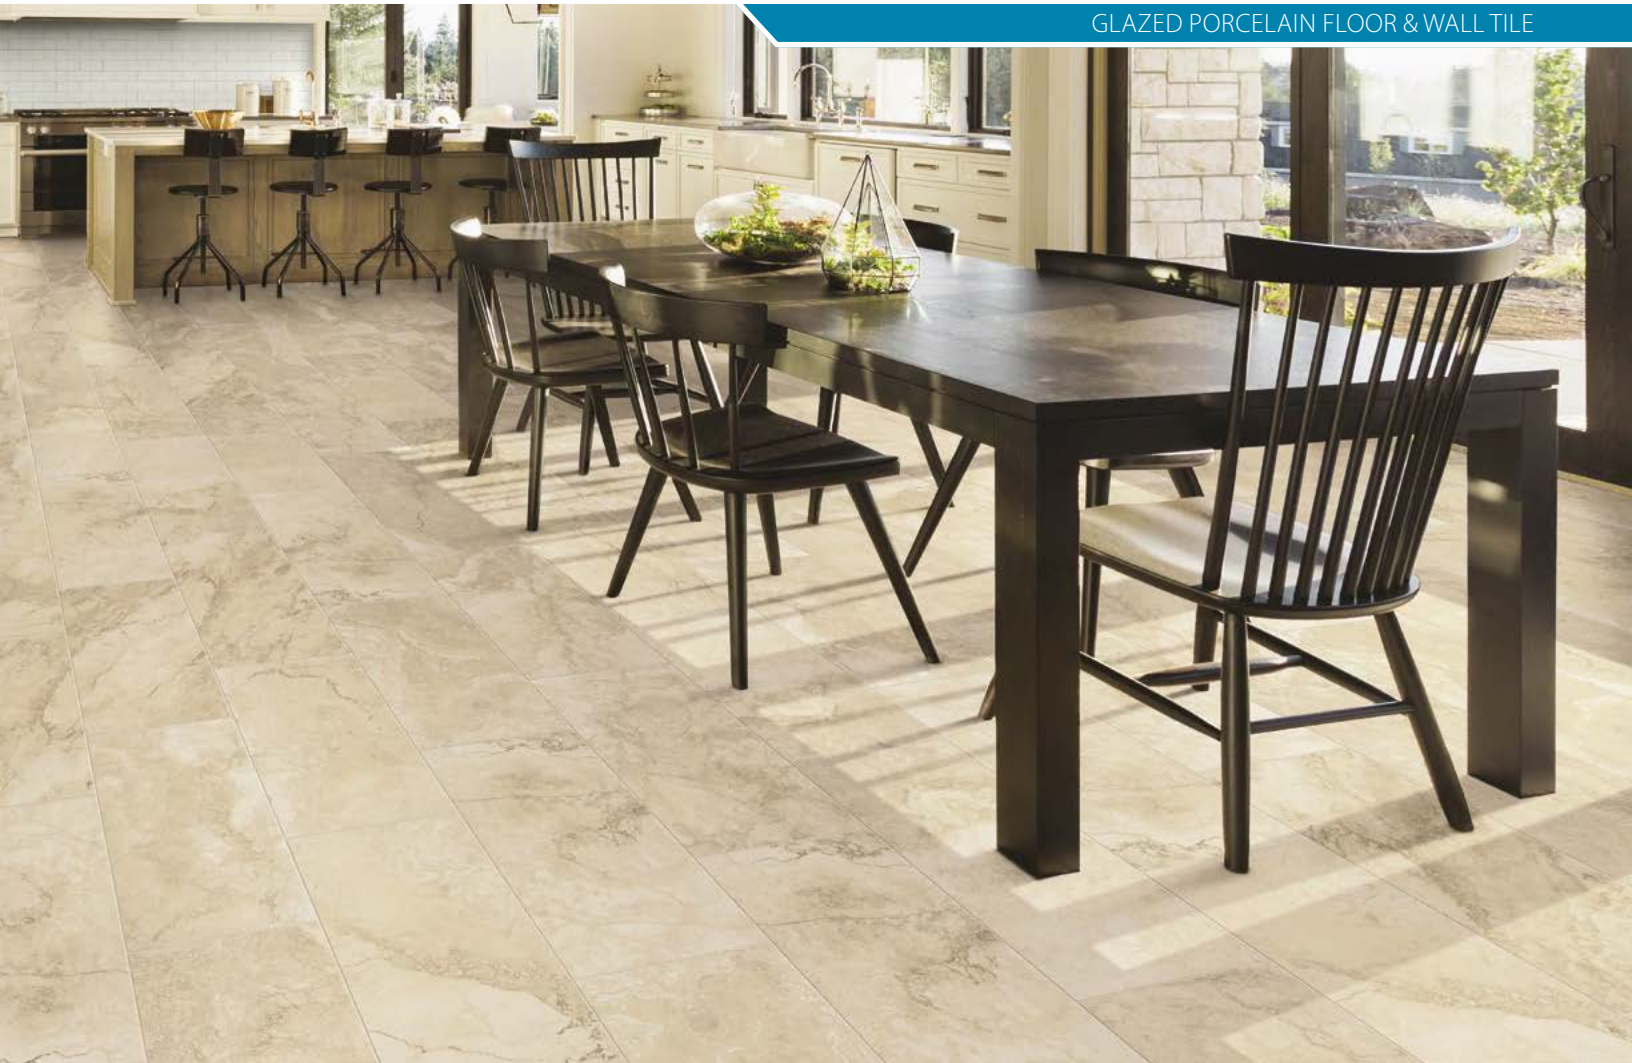

above: **TUV20 12x24** Cortona Beige & **Streamline 320 3x6** Buff

PORCELAIN TECHNICAL DATA

Country of Origin	USA	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 253 lbf. avg. (6x6 & 12x12) ≥ 355 lbf. avg. (12x24)
Surface Hardness	7 Mohs	Intended Use***	Residential, Light Commercial & Heavy Commercial
Edge	Cut (6x6) All other formats Pressed	ANSI A326.3+	Interior, Wet Plus (IW+)
Thickness	8mm & 9mm	** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V3 - Moderate Variation		

note: Product specifications are subject to change. See Technical Data Section on page 86 for details.

note: In order to provide as many size formats as possible, some sizes may be originally pressed as larger formats and then professionally cut to size. For additional information about cut tile, please visit www.floridatile.com.





FDY10
Alumina



FDY20
Cast Nickel



FDY30
Graphite



FDY40
Iron Oxide

FIELD TILE FORMAT



MOSAICS




FDY10/M12
Alumina 25pc



FDY20/M12
Cast Nickel 25pc



FDY30/M12
Graphite 25pc




FDY40/M12
Iron Oxide 25pc

TRIMS



P43N9 3x24
Bullnose

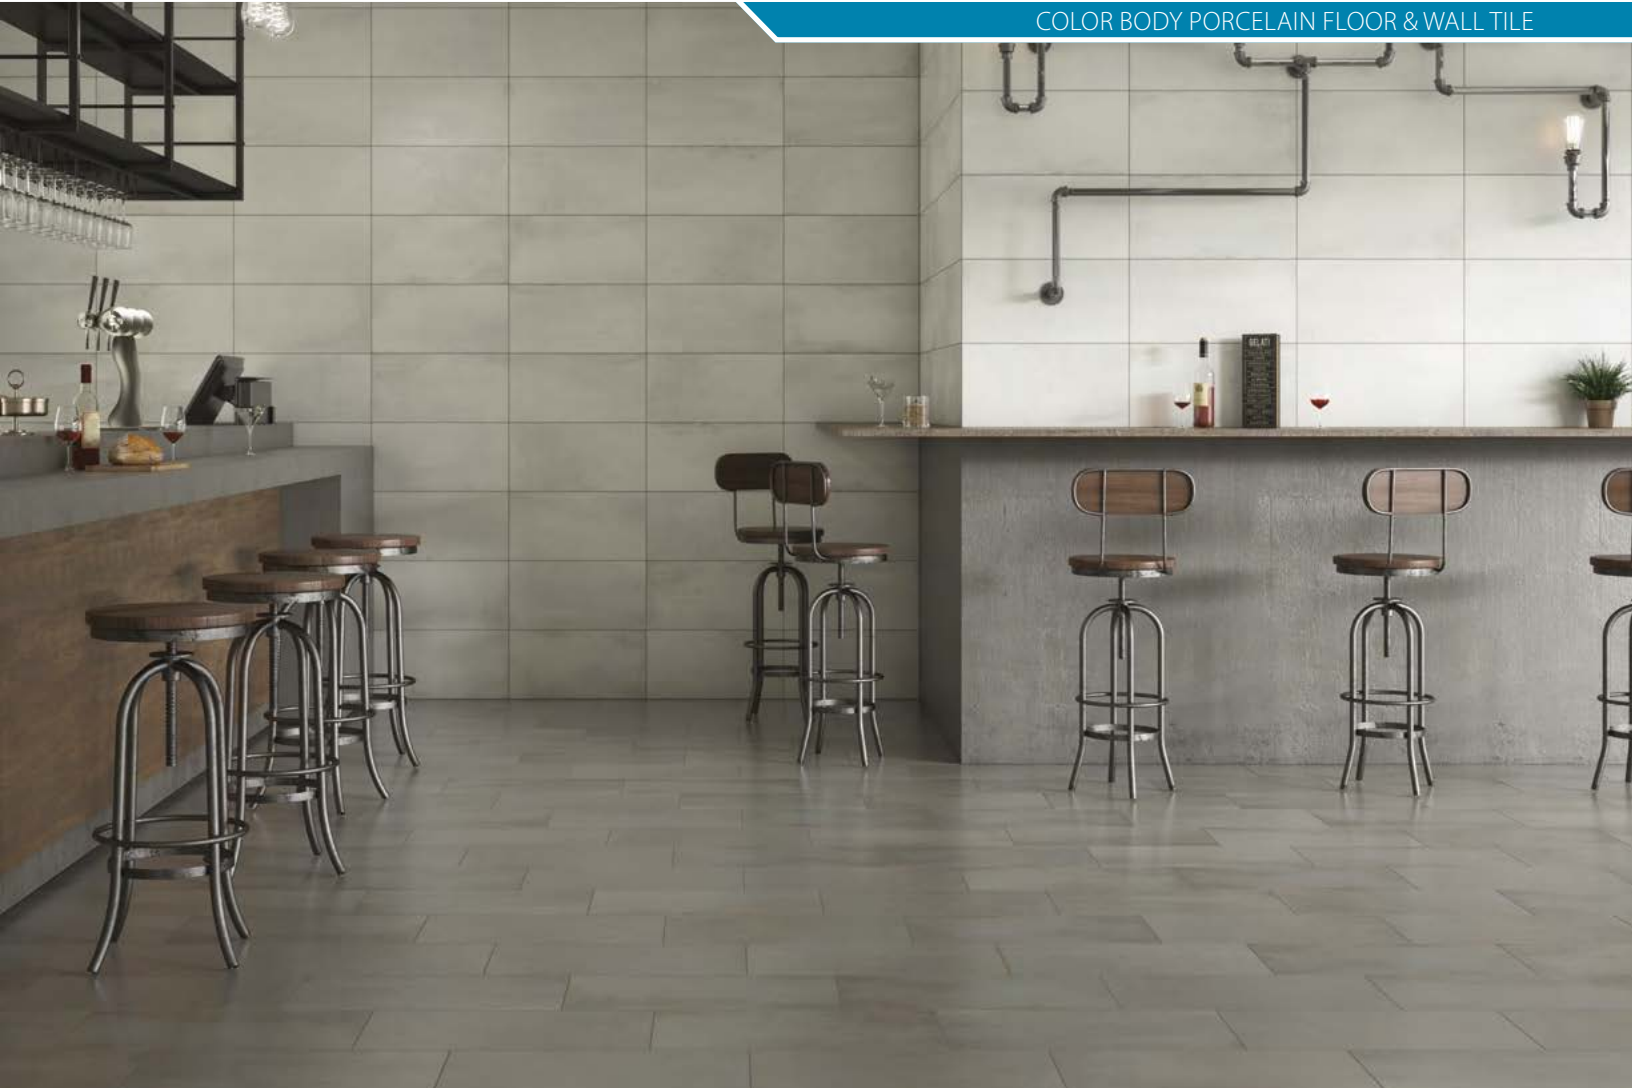

above: **FDY10 12x24** Alumina & **FDY30 12x24** Graphite

PORCELAIN TECHNICAL DATA

Country of Origin	USA	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 400 lbf. avg.
Surface Hardness	7 Mohs	Intended Use***	Residential, Light Commercial & Heavy Commercial
Edge	Pressed	ANSI A326.3+	Interior, Wet (IW) Mosaics Interior, Wet Plus (IW+)
Thickness	9mm	** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V3 - Moderate Variation		

note: Product specifications are subject to change. See Technical Data Section on page 86 for details.





89132
Sand



89123
Clay



89103
Quarry

FIELD TILE FORMATS



MOSAICS



89132/M12
Sand 25pc



89123/M12
Clay 25pc



89103/M12
Quarry 25pc

TRIM



P43C9 3x12
Bullnose

WESTMONT

GLAZED PORCELAIN FLOOR & WALL TILE



above: 89103 12x24 Quarry

PORCELAIN TECHNICAL DATA

Country of Origin	USA	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 350 lbf. avg.
Surface Hardness	7 Mohs	Intended Use***	Residential & Light Commercial
Edge	Pressed	ANSI A326.3+	Interior, Wet Plus (IW+)
Thickness	8.5mm	** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V2 - Slight Variation		

note: Product specifications are subject to change. See Technical Data Section on page 86 for details.



QUARRYBASICS®



77310
Mayflower Red




77507
Puritan Gray

QUARRYBASICS® XA ABRASIVE



7731X
Commercial Red



7757X
Stone Gray

METRO TREAD®




7731T
Red
(available in 6x6 only)




7757T
Gray
(available in 6x6 only)

FIELD TILE FORMATS



Grid System – for use in multi-directional traffic, such as commercial kitchens.



Linear System – for use in one directional traffic, such as access ramps and directional pathways.

TRIMS^{1,2}



Q1665³ 6x6
Bullnose



QC1665³ 6x6
Bullnose Corner



Q3565 6x6
Cove Base



QL3565 6x6
QR3565 6x6
Cove Outside Corner



QB3565 6x6
Cove Inside Corner



Q3585 6x7^{5/8}
Cove Base



QL3585 6x7^{5/8}
QR3585 6x7^{5/8}
Cove Outside Corner

¹ No trims are available in METRO TREAD®

² All trims available in colors QUARRYBASICS®

³ Only available in QUARRYBASICS® XA ABRASIVE

METROPOLITAN QUARRY

CERAMIC QUARRY FLOOR & WALL TILE



above: **7731T 6x6 Red** (METRO TREAD®)

QUARRY TECHNICAL DATA

Country of Origin	USA	Water Absorption	≤ 3%**
Recycled Content	4 - 10%	Break Strength	≥ 400 lbf. avg.
Surface Hardness	7 Mohs	Intended Use***	Residential, Light Commercial & Heavy Commercial
Edge	Extruded	ANSI A326.3+	Oils/Greases (O/G)
Thickness	12.7mm	** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V1 - Uniform Appearance		

note: Product specifications are subject to change. See Technical Data Section on page 86 for details.





2CM PORCELAIN PAVERS

2cm Porcelain Pavers from Florida Tile are an impressive combination of elegance and engineering. The on-trend visuals, ease of installation, and unsurpassed durability make porcelain pavers the perfect solution for easy elegance in outdoor environments.

Easy to install! Because of their density and size, porcelain pavers can be dry installed. This means that when the substrate allows, installers can forego the adhesives or mortar/cement bases. It can be dry installed on grass or gravel and a variety of other surfaces. These installation methods offer the additional advantage of removing and reusing the pavers. Of course, these pavers can be installed with traditional setting materials if the substrate requires it. Nonporous porcelain pavers are ideal for any landscape.

The technical benefits of porcelain are unbeatable! These structural paving slabs can stand up to extreme residential and commercial environments. 2cm porcelain pavers will outperform virtually any other surface option. They can tolerate both subzero temperatures and tropical climates without cracking or weakening. The porcelain manufacturing process creates a product that is virtually non-porous and incredibly dense. They are strong enough to survive under the weight of a commercial fleet and practically maintenance free. No sealants are required.

Aesthetically superior! On track with architectural and hardscape design trends, these collections are inspired by both natural materials and urban elements. Designed and manufactured with HDP-High Definition Porcelain® digital printing, they feature looks that are virtually indistinguishable from stone or wood and mimic cement and concrete perfectly. Rich graphics with stunning detail and warm colors make 2cm porcelain pavers the ideal combination of performance, appearance, and versatility.



IN & OUT



COLOR-FAST



FROST-PROOF



TRANSITABLE WHEN
APPLIED TO A SCREED
WITH ADHESIVE



EXCEPTIONAL
THERMAL SHOCK
RESISTANCE



FLAME-RETARDANT



EASY TO CLEAN



SALT, STAIN & CHEMICAL
RESISTANT



NON-SLIP SURFACE



EASY TO INSTALL,
REMOVE, REUSE &
ECO-FRIENDLY




HIGHLY RESISTANT
TO EXCESSIVE LOAD
FORCE



MIN10U
Alabaster




MIN20U
Quartz




MIN30U
Feldspar


FIELD TILE FORMAT




TRIMS




STEP TREAD
USTEPA
12x24



STEP TREAD
WITH GROOVES &
DRIP FLAP
USTEPD
12x24



STEP TREAD
WITH BULLNOSE
USTEPB
12x24

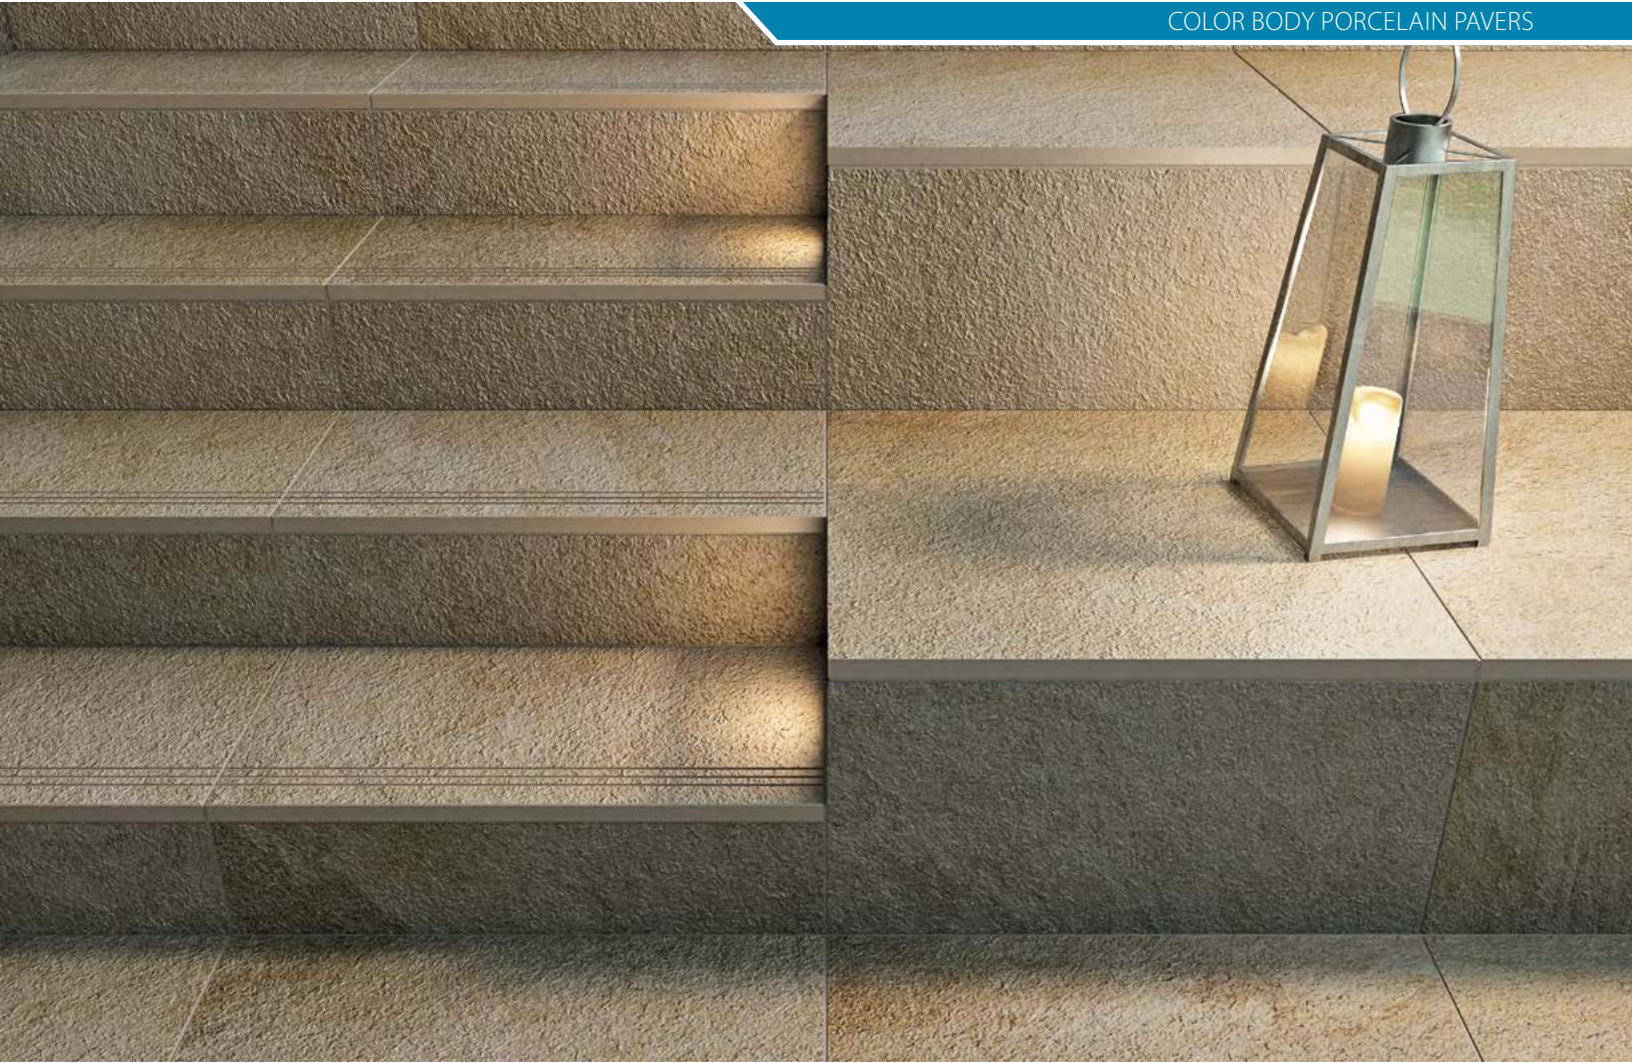

above: MIN20U 24x24 & USTEPD Quartz

PORCELAIN TECHNICAL DATA

Country of Origin	USA	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 2800 lbf. avg.
Surface Hardness	7 Mohs	Intended Use***	Residential, Light Commercial & Heavy Commercial
Edge	Pressed	ANSI A326.3+	Exterior, Wet (EW)
Thickness	2cm	** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V2 - Alabaster V3 - Quartz & Feldspar		

note: Product specifications are subject to change. See Technical Data Section on page 84 for details.





NY210U
Malibu White



NY220U
Brentwood Beige




NY230U
Riverside Steel

FIELD TILE FORMAT




24x24


TRIMS



STEP TREAD
USTEPA
12x24



STEP TREAD
WITH GROOVES &
DRIP FLAP
USTEPD
12x24



STEP TREAD
WITH BULLNOSE
USTEPB
12x24



above: **NY220U 24x24** Brentwood Beige

PORCELAIN TECHNICAL DATA			
Country of Origin	USA	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 2800 lbf. avg.
Surface Hardness	7 Mohs	Intended Use***	Residential, Light Commercial & Heavy Commercial
Edge	Pressed	ANSI A326.3+	Exterior, Wet (EW)
Thickness	2cm	** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V2 - Slight Variation		

note: Product specifications are subject to change. See Technical Data Section on page 84 for details.

++ Please contact customer service for product availability.




QUE10U
Ash




QUE20U
Cinder

FIELD TILE FORMAT




24x24


TRIMS




STEP TREAD
USTEPA
12x24



STEP TREAD
WITH GROOVES &
DRIP FLAP
USTEPD
12x24



STEP TREAD
WITH BULLNOSE
USTEPB
12x24

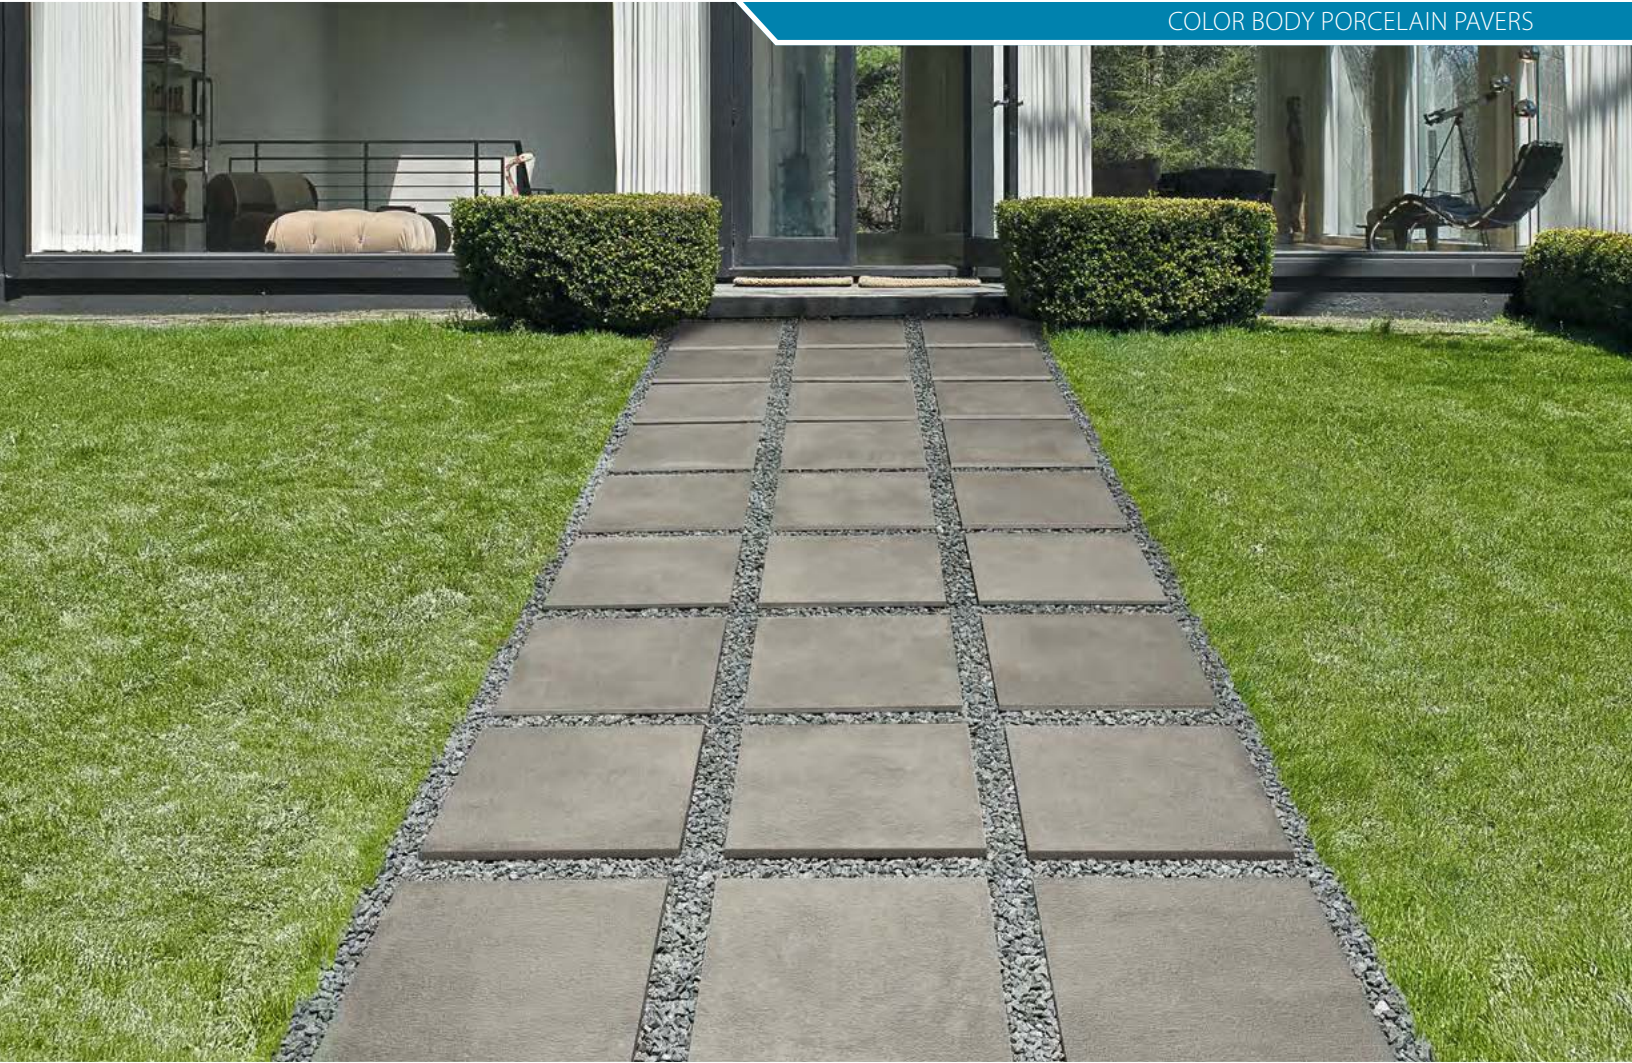

above: QUEST20U 24x24 Cinder

PORCELAIN TECHNICAL DATA

Country of Origin	USA	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 2800 lbf. avg.
Surface Hardness	7 Mohs	Intended Use***	Residential, Light Commercial & Heavy Commercial
Edge	Pressed	ANSI A326.3+	Exterior, Wet (EW)
Thickness	2cm	** Average production value *** See page 90 for more specific details' + See page 91 for more specific details	
Shade Variation	V3 - Moderate Variation		

note: Product specifications are subject to change. See Technical Data Section on page 84 for details.






REL32U
Florida




REL93U
Montana

FIELD TILE FORMAT



24x24

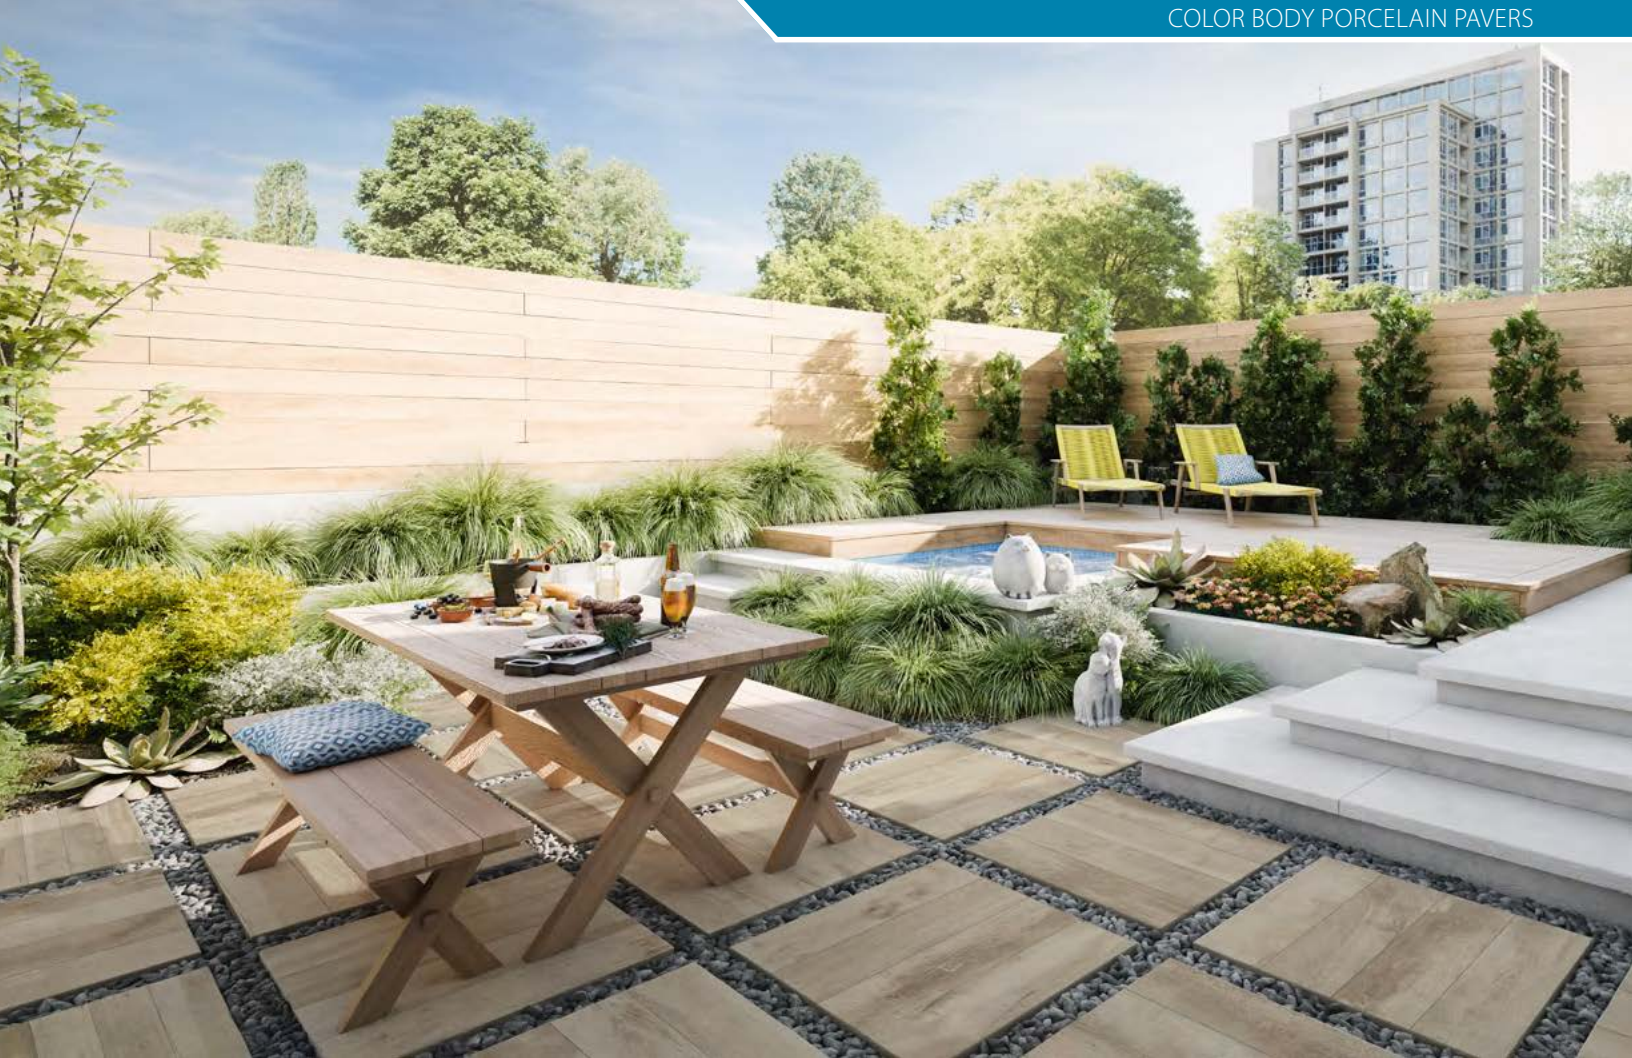

above: REL32U 24x24 Florida

PORCELAIN TECHNICAL DATA

Country of Origin	USA	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 2800 lbf. avg.
Surface Hardness	7 Mohs	Intended Use***	Residential, Light Commercial & Heavy Commercial
Edge	Pressed	ANSI A326.3+	Exterior, Wet (EW)
Thickness	2cm	** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V3 - Moderate Variation		

note: Product specifications are subject to change. See Technical Data Section on page 84 for details.






SPN01U
Snow




SPN13U
Silver


FIELD TILE FORMAT




TRIMS



STEP TREAD
USTEPA
12x24



STEP TREAD
WITH GROOVES &
DRIP FLAP
USTEPD
12x24



STEP TREAD
WITH BULLNOSE
USTEPB
12x24



above: SPN13U 24x24 Silver

PORCELAIN TECHNICAL DATA












Country of Origin	USA	Water Absorption	≤ 0.5%**
Recycled Content	40%	Break Strength	≥ 2800 lbf. avg.
Surface Hardness	7 Mohs	Intended Use***	Residential, Light Commercial & Heavy Commercial
Edge	Pressed	ANSI A326.3+	Exterior, Wet (EW)
Thickness	20mm	** Average production value *** See page 90 for more specific details + See page 91 for more specific details	
Shade Variation	V2 - Slight Variation		

note: Product specifications are subject to change. See Technical Data Section on page 84 for details.



2CM TECHNICAL DATA

ACCORDING TO ANSI A137.1 UNGLAZED PORCELAIN TILES (CLASS P1)

	Technical Characteristics	Test method	Required values ANSI A137.1		Average values UGL (unglazed)
	DCOF	ASTM A326.3	≥ 0.42		Compliant
	Water Absorption	ASTM C373	$\leq 0.5\%$ (fully vitrified)		Compliant
	Breaking Strength	ASTM C648	≥ 250 lbf		Min. 2800 lbf. avg.
	Intended Use	N/A	N/A		Residential Light Commercial Heavy Commercial
	Linear Thermal Expansion	ASTM C372	not required		$\alpha \leq 8 \times 10^{-6} \text{ } ^\circ\text{C}^{-1}$ $\alpha \leq 4.4 \times 10^{-6} \text{ } ^\circ\text{F}^{-1}$
	Thermal Shock Resistance	ASTM C484	no alterations		Resistant
	Chemical Resistance*	ASTM C650	not required		Resistant
	Frost Resistance	ASTM C1026	not required		Resistant
	Bond Resistance	ASTM C482	≥ 50 PSI		Compliant
	Stain Resistance	ASTM C1378	no alterations		Resistant
	Dimensions				
	Edge Warpage	ASTM C485	calibrated: max $\pm 0.75\%$ or max ± 0.09 inch	rectified: max $\pm 0.40\%$ or max ± 0.05 inch for tiles up to 24"x24"	Compliant
	Diagonal Warpage	ASTM C485	calibrated: max $\pm 0.50\%$ or max ± 0.08 inch	rectified: max $\pm 0.40\%$ or max ± 0.07 inch	Compliant
	Nominal Dimensions	ASTM C499	calibrated: max $\pm 3.0\%$ of nominal dimensions	rectified: - 3.0% / + 2.0% of nominal dimensions	$\pm 1.5\%$
	Caliber Range	ASTM C499	calibrated: max $\pm 0.50\%$ or max ± 0.08 inch	rectified: max $\pm 0.25\%$ or max ± 0.03 inch	Compliant
	Thickness	ASTM C499	range: ≤ 0.040 inch		≤ 0.030 inch
	Wedging	ASTM C502	calibrated: max $\pm 0.50\%$ or max ± 0.08 inch	rectified: max $\pm 0.25\%$ or max ± 0.03 inch	Compliant

(*) No hydrofluoric acid and its derivatives



TECHNICAL DATA

ACID RESISTANCE

ASTM® C-650 is the standard test method for determining resistance of ceramic tile to chemical substances. The glazed surface of Florida Tile products is resistant to virtually all caustic and corrosive liquids. Typical exceptions are fluorides and concentrated hydrochloric acid.

BREAK STRENGTH

ASTM® C-648 describes the standard test method for determining structural strength of ceramic tile. This test provides a means for establishing whether or not ceramic tile meets the strength requirements which may be required for a specific installation procedure, and its ability to withstand load and impact. The ANSI® standard requires an average breaking strength of 125 lbf. for wall tiles and 250 lbf. for floor tiles. Tiles installed on floors with adhesives may require higher breaking strengths.

CALIBERS

Tiles shrink during firing. To accommodate this shrinkage, we measure each tile as it comes down the line and assign it a caliber based on ANSI® requirements for size variation. Tiles with different calibers should be compared prior to installation to make sure they will work well together. A wider grout joint will help accommodate the size difference within and between calibers.

DYNAMIC COEFFICIENT OF FRICTION

Sometimes called kinetic coefficient of friction. This is the ratio of the force necessary to keep a surface already in motion sliding over another surface divided by the weight (or normal force) of the sliding object.¹ Different contaminants such as dirt, water, soap, oil, or grease can change this value.

FROST RESISTANCE

ASTM® C-1026 describes the standard test method for determining ceramic tile's ability to withstand repeated cycles of freezing and thawing. It determines the ability of tile to resist damage or deterioration when tested in freezing and thawing situations such as those found in central and northern sections of the United States.

INSTALLATION

Florida Tile recommends that all installations of its product comply with applicable parts of ANSI® A-108 series for ceramic tile installation. For any information, including technical questions related to the underlayment, use of setting materials, or other installation related questions, contact the Tile Council of North America. You can reach them at techinfo@tile-usa.com or you can view the TCNA Installation Handbook at www.tileusa.com/publication_main.htm.

- Use a grout joint that is at minimum 3 times the variation of the tile as per ANSI® A108.02 Section 4.3.8 Grout Joint Size: In the case of Florida Tile, all rectified product shall have, on average, no less than a 1/8 in. grout joint.
- Minimize the variation in the substrate in order to accommodate the above minimal grout joint as per ANSI® A108/A118/A136.1 - American National Specifications for the Installation of Ceramic Tile, specifically A108.01 Section 2.6.2.2 and similarly in A108.02 Section 4.1.4.3.1.

GAUGED PORCELAIN TILE PANELS (GPTP)

Also known as large panel porcelain slabs, thin porcelain tile, or large format porcelain slabs, gauged porcelain is known for its beauty, durability, ease of maintenance, and its lack of grout joints. GPT has been defined as tiles that measure 1 x 1 meter (~36 x 36 inches) or smaller, while GTPP are equal to or larger than 1 x 1 meter. Tile Council North America (TCNA) recognizes two classes of gauged tile products are defined — those for wall applications, from 3.5 to 4.9 mm in thickness, and those for floor applications, from 5 to 6.5 mm in thickness.

MOH'S HARDNESS

Scratch resistance of glazes is measured by scratching the glaze with a mineral of known hardness. Hardness of minerals is classified by Moh's Scale, which lists 10 minerals according to their hardness. Each mineral in this scale will scratch those with lower numbers in the scale, but will not scratch minerals with higher numbers. Talc is classified as number one on the Moh's Scales and diamond ten. Resilient flooring materials, such as vinyl and asphalt tile, are relatively soft and can be scratched by talc, number one on the scale. White polished marble can be scratched by calcite, which is number three. Black marble rates a four and can be scratched by fluorite. Most glazes used on ceramic tile fall in the five to six range, which is also slightly harder than most steels. Case-hardened steel, such as what is used in drill bits used for drilling holes in steel, is approximately six and will scratch most glazes. Some glazes used on ceramic tiles designed for floor use cannot be scratched by a case-hardened drill bit. Quartz, number 7 on Moh's Scale, will scratch most glazes and all but the hardest unglazed ceramic tiles. Sand is a common example of natural quartz.

OUTDOOR INSTALLATIONS

Porcelain tile is very hardy and is appropriate for vertical exterior installations. Horizontal applications require additional considerations. Any hard surface flooring will be slippery when covered in standing water, ice, grease, or leaves. Regular cleaning, maintenance, and inspection of the surface is critical to a successful outdoor tile installation.

RECTIFIED TILE

Rectification is a process of ceramic tile manufacturing in which all sides of a tile are cut with specialized machines. This creates a ceramic tile with perfectly square edges and reduces size variation between tiles, essentially creating a mono-caliber product. This has a practical application in uniformity and ease of installation, but it also has an aesthetic benefit. By allowing a reduced grout joint (within ANSI® requirements) the installation is better suited to more contemporary tastes, and stays cleaner with less grout.

RUNNING BOND/BRICK JOINT PATTERNS

Grout Joints- For running bond/brick joint patterns utilizing tiles (square or rectangle) with any size greater than 15 in. the grout shall be, on average, a minimum of 1/8 in. wide for rectified tile and, on average, a minimum of 3/16 in. wide for calibrated (non-rectified) tiles.

Offset- For running bond/brick joint patterns utilizing tiles (square or rectangular) where the side being offset is greater than 15 in. (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.

SHADES

Florida Tile assigns all of our tiles a shade based on comparison to a target piece. We also add a ‘lot letter’ (commonly referred to as the ‘dye lot’) that differentiates tiles from different runs. Tiles with different shades should be compared prior to installation to make sure they are a good match and should be well mixed during installation.


SHADE BLENDING

Designed to simulate a natural surface by using a combination of ceramic/porcelain processes, shade and texture variations are inherent in these nature-inspired products. These types of tiles are packed by shade blends and not specific shades. Products of a common shade blend type may be used together. Specific product lots are identified by the last letter of the shade code.


TECHNICAL SPECIFICATION

Tiles manufactured by Florida Tile, Inc. and marked standard grade meet or exceed the recommended standard specification for ceramic tile, ANSI® A137.1. All products are formulated using high-quality clays specifically designed for density and strength, then pressed, glazed and fired. Note that the data represented in this literature represents typical test results of randomly selected “standard” products.


SHADE VARIATION




V1 Uniform Appearance
Differences among pieces from the same production run are minimal.



V2 Slight Variation
Clearly distinguishable differences in texture and/or pattern with similar colors.



V3 Moderate Variation
While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece may vary significantly. For example “that little bit of color” on one piece of tile may be the primary color on the next piece.



V4 Random Variation
Random color differences from tile to tile, so that one tile may have totally different colors from that on other tiles. Thus, the final installation will be unique.

PLEASE NOTE:

- Not all flooring products are suitable for wet areas, specialized applications or commercial use. Please refer to the American National Standard Specifications for Ceramic Tile (ANSI® A137.1) for ceramic, stone, and glass installation for specific usage and installation information.
- In order to provide as many size formats as possible, some sizes may be originally pressed as larger formats and then professionally cut to size.
- Country of origin and other product features and characteristics are subject to change due to manufacturing efficiencies and other factors. See retailer or product packaging to verify country of origin and other product characteristics.

ICON & REFERENCE GUIDE



Made in USA

This logo indicates that the product line is manufactured in the United States, with the exception of select trim, decorative, and ceramic pieces. The source of origin of each of our products is indicated on the labels and/or packaging. For information about the origin of specific products or product lines, please refer to the label and/or packaging, or see your authorized Florida Tile retailer.



Dynamic COF (DCOF)

This logo represents the Dynamic COF (Coefficient of Friction) methodology for testing the slip potential of a tile while an object is in motion. It is the most accurate test to measure the dynamic coefficient of friction on hard surfaces and meets ANSI A326.3 specifications for ceramic tile.



GREENGUARD®

This logo indicates that this product has been tested and received GREENGUARD® Gold Certification (formerly known as GREENGUARD® Children & Schools Certification). GREENGUARD® offers strict certification criteria, considers safety factors to account for sensitive individuals (such as children and the elderly), and ensures that a product is acceptable for use in environments such as schools and healthcare facilities. It is referenced by both The Collaborative for High Performance Schools (CHPS) and the Leadership in Energy and Environmental Design (LEED®) Building Rating System.



Porcelain Tile

This logo indicates that the product line has been tested and certified by the Porcelain Tile Certification Agency (PTCA) to meet the ANSI® A137.1 standard for a true porcelain tile. This means that the product line has a water absorption rate of 0.5% or less.



Green Squared®

The logo for Green Squared® involves one industry, one standard, and one mark and covers the gamut of products used in a tile installation. It was the first multi-attribute sustainability standard developed for tiles and tile installation materials. Green Squared® uses the transparency and consensus of the ANSI® process combined with third party certification to evaluate, validate, and communicate products which have a positive impact on the environment and society. Green Squared® covers product characteristics, manufacturing, end of product life management, progressive corporate governance, and innovation in an effort to establish sustainability criteria for products throughout their full life cycle.



Recycled Content

This logo indicates that the product line contains some quantity of recycled content. In most cases, the percentage of recycled content is pre-consumer material. If the recycled logo is accompanied by a number inside the box, then it has been tested and determined that the product contains at least that percentage of recycled material.



Rectified Tile

This logo indicates that some sizes in this collection are rectified. Rectified tiles have been mechanically cut to achieve edges that are more uniform, with less variation in size from tile to tile. One benefit of this process is allowing for more narrow grout joints.

MICROBAN®

Microban® and Florida Tile have teamed up to provide antimicrobial protection for ceramic tiles. Florida Tile products are well known for their beauty, durability, and performance. The addition of Microban® built-in technology featuring silver provides a continuous level of protection from the growth of common microbes.



ABOUT MICROBAN®

Microban® International, Ltd. is a global technology company dedicated to enhancing high quality consumer, industrial, and medical products with branded built-in protection from microbial growth. Microban® is a registered trademark of Microban® Products Company.

The Microban® brand offers continuous and durable antimicrobial product protection, built-in during manufacturing to last for the useful life of the product. Microban® International is headquartered in North Carolina with operations in North America, South America, Europe, and Asia.

WHY MICROBAN® PROTECTION?

Microbes on floors can be a source of cross-contamination where microbes can transfer from one surface to another and from one area to another. This transfer can take place by human contact with the contaminated surface (for example touching with hands or shoes). Dirt and microbes are continually being brought into the home through foot traffic from people and also pets!

The goal of antimicrobial protection is to minimize the number of microbes which colonize a surface and therefore reduce the possibility of the microbes transferring to other surfaces where they may cause potential issues. Looking at hotspots within the home, the kitchen and bathroom have the potential for the highest number of microbes which can rapidly spread from one surface to another.

HOW CLEAN ARE YOUR TILES?

Micro-organisms are a fact of life. They are everywhere, all around us, all the time. However hard we try, there's no getting away from them. Some are good for us, others are neutral, but a few are damaging. So it makes sense to do what we can to prevent their potentially harmful and undesirable effects. Under right conditions of warmth, a food source, time, and a little humidity, microbes can grow and divide extremely rapidly and bacterial populations can double as quickly as every 20 minutes. In addition, microbes can persist on inert surfaces for a long time. On average, there may be more microbes on your hand than people on Earth.

ANTIMICROBIAL PROPERTIES OF MICROBAN ON PORCELAIN TILE:

- Active day and night, 24/7
- Active both in light and dark conditions, with no need to use UV lamps
- Active on the surface of the material
- Permanently integrated into the surface during industrial firing at a temperature of 1200°C (it is not a surface treatment applied after firing)
- Active over time, resistant to wear, lasting for the lifetime of the tiles, it is permanent and does not need to be re-treated over the lifecycle of the product

Antimicrobial porcelain tiles are ideal for any environment, especially those that call for a high standard of cleanliness, such as:

- Hotels, restaurants, cafeterias
- Hospitals, operating rooms
- Wellness centers, spas, swimming pools, gyms
- Retirement homes, schools, nursery schools
- Agricultural and food industries
- Public areas, businesses, offices
- Residential kitchens and bathrooms

LEED® BUILDINGS

Microban® tiles manufactured by Florida Tile allow you to be awarded 1 point for the ID 1 Innovation in Design Credit.
(ref. NC, CI, CS and SCHOOLS LEED® Rating Systems)

P R () T E C T

Is the exclusive antibacterial technology by Panariagroup, result of a partnership with Microban®, world leader in the sector. This is an effective antibacterial shield incorporated in the ceramic product and eliminates up to 99.9% of bacteria from the surface.

INTENDED USE

GENERAL USAGE GUIDELINES

The following General Usage Guidelines highlight those floor application types that we generally consider to be appropriate for designated product lines. However, every installation is unique and requires careful consideration of the specific requirements for that particular project. For specific determinations as to the suitability of specific products for your application, please consult an experienced tile installer, design professional, or the TCNA handbook. Ultimately it is the responsibility of the project manager to choose the most appropriate product for each project based on need and traffic. Not all projects are the same.

RESIDENTIAL

Products designated as “Residential” are generally considered appropriate for use in residential (non-commercial) floor areas that are subject to normal foot traffic, including kitchens, bathrooms, living areas, and other residential environments. In heavy-traffic areas, products with GLOSSY/POLISHED/TOUCH finishes are not recommended.

LIGHT COMMERCIAL

Products designated as “Light Commercial” are generally considered appropriate for use in commercial floor areas that are subject to considerable foot traffic greater than residential applications, including offices, waiting rooms, retail shops, public bathrooms, apartment building common areas, restaurant dining rooms, car showrooms, bars, cinemas, medical clinics, hotel guest rooms and bathrooms. In heavy-traffic areas, products with GLOSSY/POLISHED/TOUCH finishes are not recommended.

HEAVY COMMERCIAL

Products designated as “Heavy Commercial” are generally considered appropriate for use in commercial floor areas that are subject to extensive foot traffic, including shopping center common areas, hotel lobbies, fast food restaurants, dance clubs, hospitals, schools, museums, houses of worship, airports, train and bus stations, and other interior applications where heavy traffic is anticipated.

NOTES

- These are general use guidelines only and are no substitute for competent, professional architectural and design input specific to each project. For example, a product classified as Light Commercial might be suitable for use in some areas of a regional airport with moderate foot traffic, while even a Heavy Commercial product may be subject to premature wear and tear if used in a heavy-traffic industrial area where regular cleaning and maintenance are not performed.
- The occasional presence of minor color variation, spots, or other small imperfections is considered a characteristic of the material and of its unique manufacturing process.
- If product is installed in direct contact with external environments, use of protective solutions, a protective mat, or other anti-scratch alternatives may be necessary to reduce the formation of scratches.
- Use of low thickness products is not recommended in areas subject to heavy loads.
- GLOSSY/POLISHED/TOUCH finishes are recommended for wall cladding, as well as for flooring in Residential or Light Commercial areas that are not subject to heavy traffic, and where an anti-slip performance (DCOF) is not required.



PRODUCT USE CLASSIFICATIONS

ANSI A326.3

ANSI A326.3 (American National Standard Test Method for Measuring Dynamic Coefficient of Friction of Hard Surface Flooring Materials) features a five-category product use classification system that allows manufacturers to communicate areas for possible use based on the slip resistance characteristics of their products.

The five product use categories are as follows:

Classification	Reference Category	Criteria
Interior, Dry	ID	≥ 0.42 dry DCOF* (Per Section 10.1)
Interior, Wet	IW	≥ 0.42 wet DCOF* (Per Section 9.1) or Manufacturer-Declared
Interior, Wet Plus	IW+	Manufacturer-Declared Standards > ANSI A326.3 generally accepted minimum conditions
Exterior, Wet	EW	Manufacturer-Declared Standards > ANSI A326.3 generally accepted minimum conditions
Oils/Greases	O/G	Manufacturer-Declared Standards > ANSI A326.3 generally accepted minimum conditions

According to the standard, hard surface flooring products shall be classified into one or more of the categories. Additionally, the standard provides informative notes for each category that state generally accepted minimum conditions.

To review the complete ANSI A326.3 standards and FAQs please visit <https://www.floridatile.com/productuseclassifications>.

Florida Tile's declared use classifications can be found on the bottom of each collection page in the Technical Specifications section as well as on each collection's Technical Sheet, downloadable from <https://www.floridatile.com/downloads/>.



MADE IN THE USA COLLECTIONS



www.floridatile.com

