

# BERKSHIREHDP 1

Shown on front: 25535 6x24 Hickory

Berkshire<sup>HDP</sup> by Florida Tile evokes the history and romance of the rugged yet refined American Northeast. Rich colors and an intricate surface texture give it the look and feel of reclaimed lumber that has already withstood a lifetime. The character of historied timbers shows through with every plank. Using our proprietary HDP – High Definition Porcelain printing, we create an amazing wood look that is almost indistinguishable from the real thing.

A color palette named for five wood varieties: Oak, Hickory, Olive, Walnut, and Maple, encompass the majestic beauty of old growth forests. The tight grains, tone variations, and natural inconsistencies of real wood are precisely replicated. Available in 6x24 and 8x36 pressed planks, 12x12 parquet mosaics, and a 3x24 bullnose, this color body porcelain floor and wall tile lends rustic charm to any space.

Berkshire HDP is appropriate for all applications in both residential and commercial settings. It is entirely made in the USA in our Green Squared® certified Advanced Manufacturing Center in Lawrenceburg, KY, of 40% pre-consumer recycled content. It meets the DCOF AcuTest requirements to be installed in wet areas and is GREENGUARD® and Porcelain Tile certified.





25525/M12REC Oak Parquet Mosaic



**25525 6x24** Oak



**25525 8x36** Oak





**25535 6x24** Hickory



**25535 8x36** Hickory







**25585 6x24** Walnut



**25585 8x36** Walnut








**25555 6x24** Olive



**25555 8x36** Olive

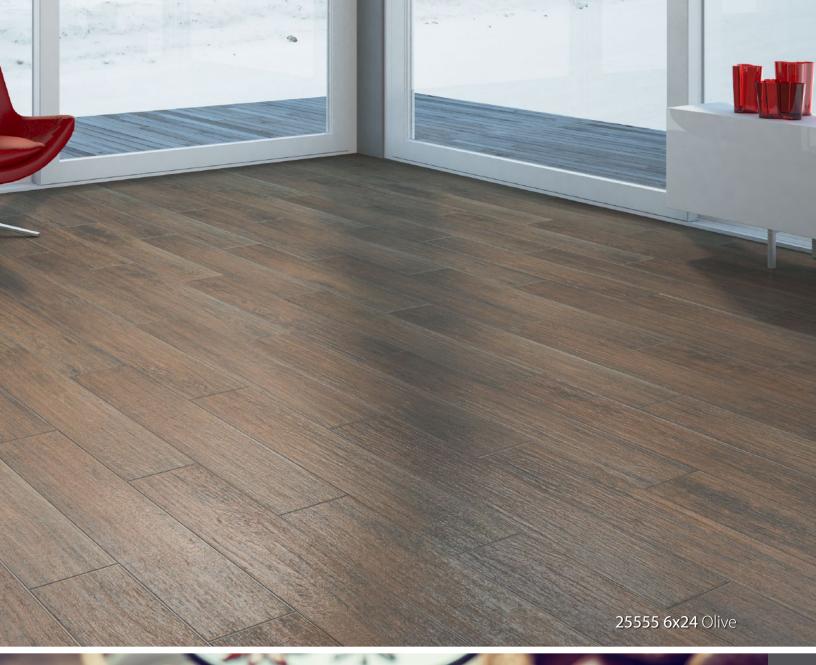





**25595/M12REC**Maple Parquet Mosaic



**25595 6x24** Maple



**25595 8x36** Maple





# BERKSHIRE HDP





## **Typical Uses**

Berkshire<sup>HDP</sup> color body porcelain floor and wall tile is appropriate for all residential and commercial wall, countertop, and backsplash applications, all residential, and most commercial floor applications.

Notice: Not all flooring products are suitable for wet areas, specialized applications, or commercial use. Please refer to the American National Standard Specifications for Ceramic Tile (ANSI A137.1) for ceramic, stone, and glass installation for specific usage and installation information.

This Florida Tile product will contribute to USGBC LEED® points and the ANSI® approved NAHB® Green Building Points.

### Color Variations

Color reproductions in this printed piece may vary from actual tile colors. Final selection should be made from actual tile samples.



#### V2 Slight Variation:

Clearly distinguishable differences in texture and/or pattern with similar colors.

Porcelain Technical Data Properties (Floor)	ASTM®	ANSI®	Results <sup>1</sup>
DCOF AcuTest®2	A137.1	≥0.42	Pass
Surface Hardness	Mohs Scale	N/A	6 Mohs
Break Strength	C-648	250 lbf.	800 lbf. avg.
Water Absorption	C-373	<0.5%	<0.5%3
Visual Abrasion Resistance	C-1027	As Reported	Class IV <sup>4</sup>

<sup>&</sup>lt;sup>1</sup> These tests are performed by a 3rd party testing lab using industry standard equipment and techniques. Values are offered in good faith as being accurate and typical of normal production. Due to the natural variation of raw materials and manufacturing processes, the values of the purchased product for any particular installation may vary.

<sup>&</sup>lt;sup>4</sup> Class 0 Not recommended for floors, Class I Light Residential, Class II Residential, Class III Heavy Residential or Light Commercial, Class IV Commercial, Class V Heavy Commercial.













<sup>&</sup>lt;sup>2</sup> ANSI A137.1 standard, ceramic tiles selected for level interior spaces expected to be walked upon when wet must have a minimum wet DCOF AcuTest value of 0.42.

<sup>&</sup>lt;sup>3</sup> Average Production Value