

# ALAVA

# HDP

High Definition Porcelain®

Glazed Porcelain Floor and Wall Tile



floridatile



# A L A V A HDP

High Definition Porcelain

BY floridatile



Shown: **33512 8x36** Cottage

Alava<sup>HDP</sup> is named after a region in Northwestern Spain, known for its rugged, rocky landscape and tradition of producing of high quality lumber. Appropriately, the Alava<sup>HDP</sup> collection from Florida Tile features 6x24 and 8x36 planks composed of a rustic reclaimed wood graphic complete with nail holes, worn-in stains and a soft wood grain texture. Both sizes are available in three timeworn, beautiful colors – Cottage, Lodge, and Villa.

Alava<sup>HDP</sup> is entirely made in the USA of 40% pre-consumer recycled content, is GREENGUARD® and Porcelain Tile certified, and meets the DCOF AcuTest requirements to be installed in wet areas.

Shown on Front: **33524 8x36** Lodge



## glazed porcelain floor & wall tile




33512 6x24 Cottage



33512 8x36 Cottage



33524 6x24 Lodge

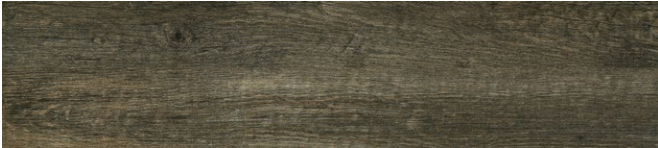

33524 8x36 Lodge



33533 6x24 Villa



33533 8x36 Villa







Shown: 33533 8x36 Villa

# A L A V A HDP

High Definition Porcelain

BY floridatile

## Typical Uses

Alava<sup>HDP</sup> glazed porcelain floor and wall tile is appropriate for all residential and commercial wall, countertop and backsplash applications, all residential and most commercial floor applications.

Notice: Not all flooring products are suitable for wet areas, specialized applications or commercial use. Please refer to the American National Standard Specifications for Ceramic Tile (ANSI A137.1) for ceramic, stone and glass installation for specific usage and installation information.

This Florida Tile product will contribute to USGBC LEED points and the ANSI approved NAHB Green Building Points.

Properties (Floor)	ASTM	ANSI	Results <sup>1</sup>
DCOF AcuTest <sup>2</sup>	A326.3	≥0.42	Pass
Visible Abrasion Resistance	C1027	As Reported <sup>3</sup>	Class IV
Mohs Surface Hardness	CTI 81-7	Not Required	7 Mohs
Break Strength	C648	250 lbf	370 lbf avg.
Water Absorption	C373	≤0.5%	Conforms

<sup>1</sup> These tests are performed by a 3rd party testing lab using industry standard equipment and techniques. Values are offered in good faith as being accurate and typical of normal production. Due to the natural variation of raw materials and manufacturing processes, the values of the purchased product for any particular installation may vary.

<sup>2</sup> ANSI A326.3 standard, ceramic tiles selected for level interior spaces expected to be walked upon when wet must have a minimum wet DCOF AcuTest value of 0.42.

<sup>3</sup> Class 0 Not recommended for floors, Class I Light Residential, Class II Residential, Class III Heavy Residential or Light Commercial, Class IV Commercial, Class V Heavy Commercial.

Field Tile Nominal Size <sup>1</sup>	Metric (cm)	Pcs./Sq Ft <sup>2</sup>	Thickness <sup>3</sup>
6" x 24"	15 x 60	1	10mm
8" x 36"	20 x 90	.5	10mm


<sup>1</sup> These values may vary from lot to lot.

<sup>2</sup> These values are based on actual sizes including the grout joint.

<sup>3</sup> May not apply to textured surfaces or tiles with uneven back patterns.

## Color Variations

Color reproductions in this printed piece may vary from actual tile colors. Final selection should be made from actual tile samples.



### V3 = Moderate Variation

While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece may vary significantly. For example, "that little bit of color" on one piece of tile may be the primary color on the next piece.



floridatile