





Shown: 34293 8x36 Mantra

In our chaotic world, designing a space that exudes natural beauty and a peaceful energy is essential. Kerala^{HDP} wood-look porcelain introduces an ambience of warmth, sophistication, and sustainability. The elegant wood grain is equally fitting for a serene bedroom or a vibrant family room. Expressive wood patterns combine with an organic color palette to capture a timeless essence that will withstand fleeting design trends. Kerala^{HDP} will last for generations to come.

These 6x24 and 8x36 pressed porcelain planks are available in three colors: Karma - a warm honey, Mantra - a rich russet, and Nirvana - a nut brown. A basket weave mosaic in each of the available colors provides a touch of the exotic to complete the line.

Manufactured using proprietary HDP—High Definition Porcelain® printing technology, Kerala^{HDP} is appropriate for residential settings. It is entirely made in the USA in our Green Squared® certified Advanced Manufacturing Center in Lawrenceburg, KY, of 40% pre-consumer recycled content. It is GREENGUARD® and Porcelain Tile certified.

COLOR VARIATION



34236 Karma



34293 Mantra



34296 Nirvana



Shown: 34236 8x36 Karma, 34236/M122BW Karma Basketweave Mosaic



34236 6x24 & 8x36 Karma



34236/M122BWKarma Basketweave Mosaic



Shown: 34293 8x36 Mantra



34293 6x24 & 8x36 Mantra



34293/M122BWMantra Basketweave Mosaic




Shown: 34296 8x36 Nirvana, 34296/M122BW Nirvana Basketweave Mosaic



34296 6x24 & 8x36 Nirvana



34296/M122BWNirvana Basketweave Mosaic

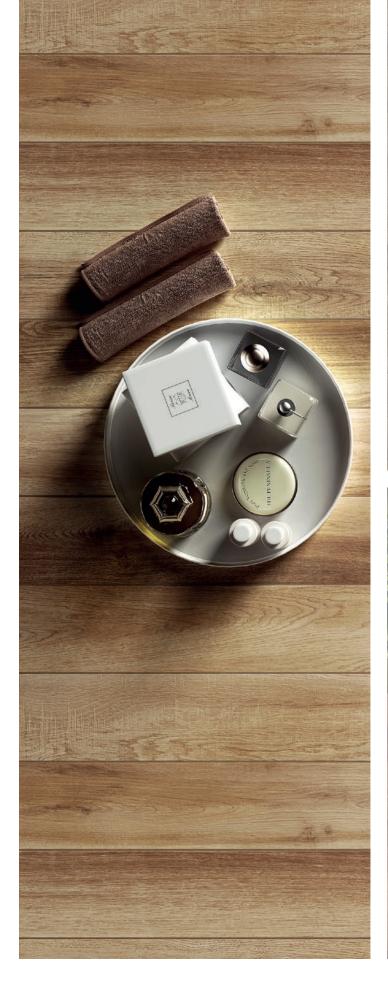







Shown: 34236 8x36 Karma, 34236/M122BW Karma Basketweave Mosaic

KERALA HDP

By floridatile

Typical Uses

Kerala^{HDP} color body porcelain floor and wall tile is appropriate for all residential and commercial wall, countertop, and backsplash applications, and all residential floor applications.

Notice: Not all flooring products are suitable for wet areas, specialized applications, or commercial use. Please refer to the American National Standard Specifications for Ceramic Tile (ANSI A137.1) for ceramic, stone, and glass installation for specific usage and installation information.

This Florida Tile product will contribute to USGBC LEED points and the ANSI approved NAHB Green Building Points.

Field Tile Nominal Size ¹	Metric (cm)	Pcs./Sq Ft ²	Thickness ³
6" x 24"	15 x 60	1	10mm
8" x 36"	20 x 90	.5	10mm

These values may vary from lot to lot.

Properties (Floor)	ASTM	ANSI	Results ¹
DCOF AcuTest ²	A137.1	≥0.42	Not Pass
Visible Abrasion Resistance	C-1027	As Reported ³	Class IV ⁵
Surface Hardness	Mohs Scale	N/A	7 Mohs
Break Strength	C-648	250 lbf.	760 avg. lbf.
Water Absorption	C-373	<0.5%	<0.5%4

¹ These values vary from lot to lot. All test results are from independent laboratory tests.

Color Variations

Color reproductions in this printed piece may vary from actual tile colors. Final selection should be made from actual tile samples.



V3 = Moderate Variation

While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece may vary significantly. For example, "that little bit of color" on one piece of tile may be the primary color on the next piece.















²These values are based on actual sizes including the grout joint.

³ May not apply to textured surfaces or tiles with uneven back patterns.

² ANSI A137.1 standard, ceramic tiles selected for level interior spaces expected to be walked upon when wet must have a minimum wet DCOF AcuTest value of 0.42.

lass 0 Not recommended for floors, Class I Light Residential, Class II Residential, Class III Heavy Residential or Light Commercial, Class IV Commercial, Class V Heavy Commercial.

Average Production Value.

⁵ Class III: Sand. Class IV: Quarry & Clay.