

#### SEQUENCE HDP

shown on front: 34901 18x36 Breeze

Sequence<sup>HDP</sup> is inspired by the elegant Varana stone found in the Emilia Romagna region of Italy. With its light grey coloration, small compact granules and contrasting wave-like veining, Varana stone is the material of choice on altars and baptismal fonts throughout that area. Florida Tile's unique interpretation of this stone, Sequence<sup>HDP</sup> brings versatile color and size options in a color body glazed porcelain tile that realizes an ideal palette for designers.

The tone-on-tone veining in Sequence<sup>HDP</sup> allows for beautiful shade variations in each of its four color choices: Breeze, a light dove tone with waves of a neutral beige; Drift, a warm taupe accentuated with darker greys and browns; Current, a medium grey with steel blue-grey delineations; and Vortex, a dark slate grey with black graphic effects. Available in three rectified large-format sizes: 3.17x12, 12x24, 24x24 and 18x36; and a rectified plank 9x36, all feature a soft, flat surface and rectified edges allowing for tight, nearly seamless installations.

Complementing the field tile are two mosaics; the first is a herringbone pattern made of 1x3 strips that give the product an upscale look commonly found in natural stone. The other is an oversized 4" hexagon pattern. Both designs are meshmounted and sized at 12x12. Completing the collection is a 3x24 bullnose trim. The mosaics and bullnose are available in all four collection colors.

Manufactured using proprietary HDP—High Definition Porcelain® printing technology, SequenceHDP is appropriate for all applications in both residential and commercial settings. It is made in the USA in our Green Squared® certified Advanced Manufacturing Center in Lawrenceburg, KY, and includes pre-consumer recycled content. It meets the DCOF AcuTest® requirements to be installed in wet areas and is GREENGUARD® and Porcelain Tile certified. Incorporated into the tile surface is Microban® antimicrobial technology that works continuously to inhibit bacteria growth, improve visible cleanliness, and reduce odors.

below: **34915 9x36** Current & **34915/M1x3HER** Current Herringbone Mosaic



## **COLOR VARIATION**



Breeze



Drift



Current



Vortex

# BREEZE



**34901 3.75x12** Breeze

**34901 12x24** Breeze



**34901 24x24** Breeze



**34901 18x36** Breeze



**34901 9x36** Breeze



**34901/M1x3HER**Breeze Herringbone Mosaic



**34901/M4x4HEX**Breeze Hexagon Mosaic



## DRIFT



34938 3.75x12 34938 12x24

Drift



**34938 24x24** Drift



**34938 18x36** Drift

Drift




**34938 9x36** Drift



**34938/M1x3HER**Drift Herringbone Mosaic



**34938/M4x4HEX**Drift Hexagon Mosaic

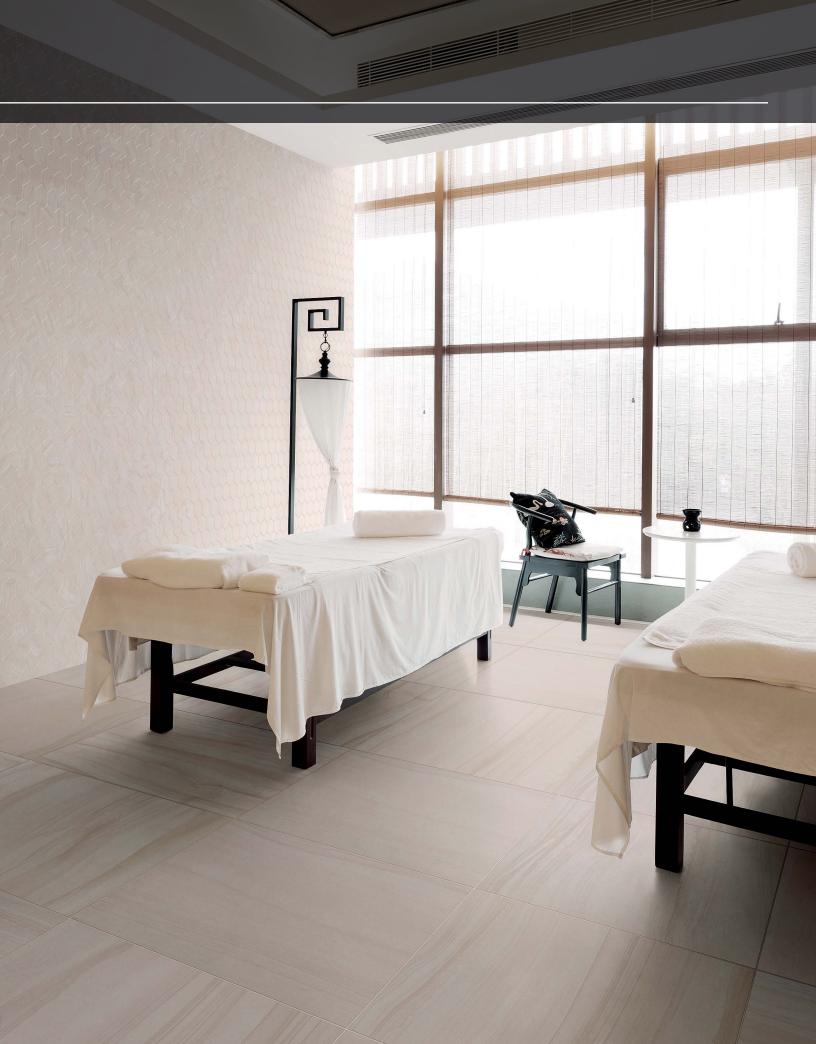

# CURRENT



**34915 3.75x12** Current

**34915 12x24** Current



**34915 24x24**Current



**34915 18x36** Current



**34915 9x36** Current



**34915/M1x3HER**Current Herringbone Mosaic



**34915/M4x4HEX**Current Hexagon Mosaic





## DRIFT





**34905 3.75x12** Vortex





**34905 24x24** Vortex



**34905 18x36** Vortex




**34905 9x36** Vortex



**34905/M1x3HER** Vortex Herringbone Mosaic



**34905/M4x4HEX**Vortex Hexagon Mosaic

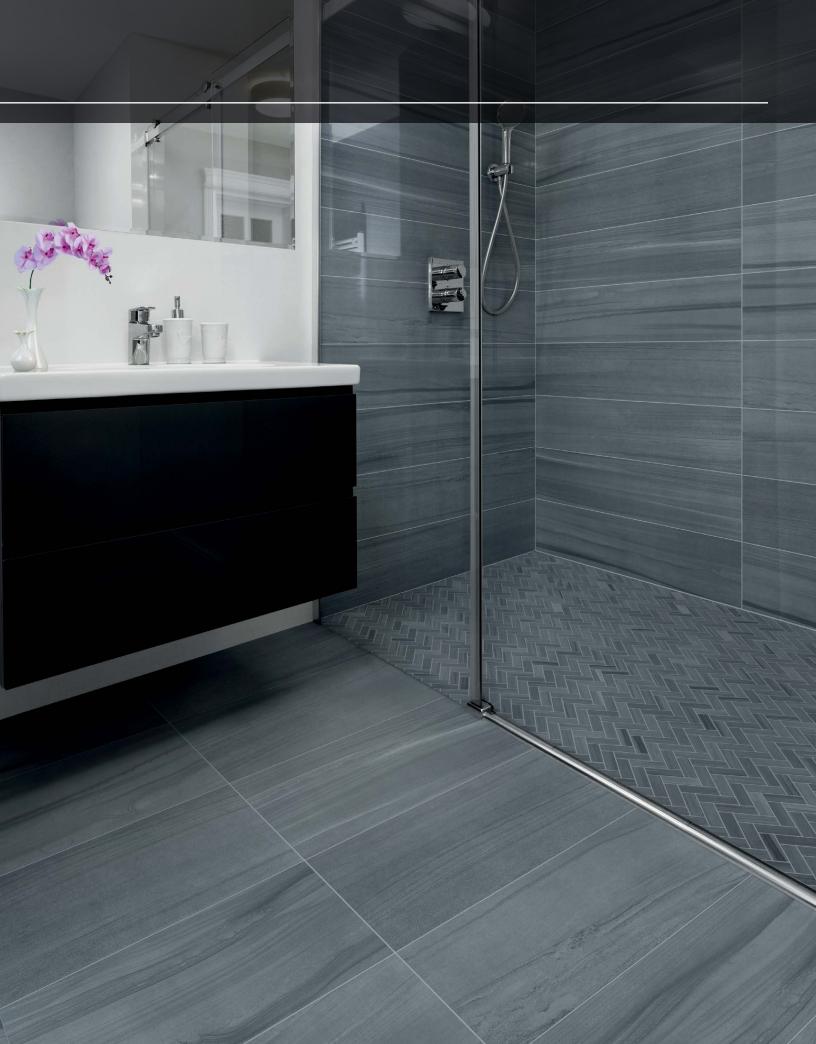



above: 34938 24x24 Drift & 34938/M4x4HEX Drift Hexagon Mosaic

Porcelain Technical Data Properties (Floor)	ASTM®	ANSI®	Results <sup>1</sup>
DCOF AcuTest®2	A137.1	≥ 0.42	Pass
Surface Hardness	Mohs Scale	N/A	7 Mohs
Break Strength	C-648	≥ 250 lbf.	≥ 490 lbf. avg.
Water Absorption	C-373	≤ 0.5%	≤ 0.5%³
Intended Use <sup>4</sup>	N/A	N/A	Residential Light Commercial Heavy Commercial

<sup>&</sup>lt;sup>1</sup> Values are offered in good faith as being accurate and typical of normal production. Due to the natural variation of raw materials and manufacturing processes, the values of the purchased product for any particular installation may vary.

#### **Typical Uses**

SequenceHDP color body porcelain floor and wall tile is appropriate for residential and commercial wall, countertop, backsplash and most floor applications.

Notice: Not all flooring products are suitable for wet areas, specialized applications, or commercial use. Please refer to the American National Standard Specifications for Ceramic Tile (ANSI® A137.1) for ceramic, stone, and glass installation for specific usage and installation information.

This Florida Tile product will contribute to USGBC LEED® points and the ANSI® approved NAHB® Green Building Points.

Color, texture, and finish variations may occur due to the nature of the product.

Color reproductions in this printed piece may vary from actual tile colors. Final selection should be made from actual tile samples.

Field Tile Nominal Size (in) <sup>1</sup>	Metric (cm)	Pcs./Sq Ft <sup>2</sup>	Thickness <sup>3</sup>	Edge
3.75x12	9.5x30	3.26	10mm	Rectified
12x24	30x60	.5	10mm	Rectified
24x24	60x60	.25	10mm	Rectified
9x36	22.5x90	.44	10mm	Rectified
18x36	45x90	.22	10mm	Rectified

<sup>&</sup>lt;sup>1</sup>These values may vary from lot to lot.

<sup>&</sup>lt;sup>3</sup> May not apply to textured surfaces or tiles with uneven back patterns such as mesh mounted mosaics

Trim	Shape	Sku	Nominal Size (in) <sup>1</sup>	Metric (cm)
Bullnose		P43N9	3x24	7.5x60

<sup>&</sup>lt;sup>1</sup>These values may vary from lot to lot.

Color Variation				
	<b>V2 Slight Variation</b> Clearly distinguishable differences in texture and/or pattern with similar colors.			



















<sup>&</sup>lt;sup>2</sup> ANSI® A137.1 standard, ceramic tiles selected for level interior spaces expected to be walked upon when wet must have a minimum wet DCOF AcuTest® value of 0.42.

<sup>3</sup> Average production value.

<sup>&</sup>lt;sup>4</sup> Please visit www.floridatile.com/intended-use for further details.

<sup>&</sup>lt;sup>2</sup>These values are based on actual sizes including the grout joint.