

# floridatile

MADE IN THE USA COLLECTIONS

2025



# WHO WE ARE

Since 1954, Florida Tile has been dedicated to delivering the most innovative and beautiful tiles in the industry.

With a mission to develop the finest products while protecting environmental resources, Florida Tile consistently leads the industry in innovation and sustainability.

We are proud to be a Green Squared Certified Manufacturing Facility certified by UL Environment and the first tile manufacturer to have all products GREENGUARD® certified for low VOC emissions. **Producing aesthetically elevated and sustainable products is a cornerstone of our corporate strategy.**



Florida Tile is a registered US Verified Vendor.





This catalog is a resource for those choosing to specify and purchase products proudly made in the USA. Products manufactured in the United States keep Americans working, stimulate the domestic economy, and eliminate the energy, resources, emissions, and added costs required to import these same products.

For over 70 years, Florida Tile has worked to deliver the most innovative and beautiful tile in the industry. This commitment has taken us from being a small, ceramic trim producer in Lakeland, Florida to a leading manufacturer of porcelain floor and wall tile across the USA. We remain committed to leading the industry in innovation and sustainability.

In 2024, significant investments were made in state-of-the-art technology for the Advanced Manufacturing Facility in Kentucky. The addition of dry-fix technology and a polishing line has enabled the production of more sophisticated designs, superior structural effects, and enhanced decorative finishes. These advancements ensure competitiveness in the marketplace while proudly bearing the "Made in the USA" label.





# SUSTAINABILITY

## Lasting impact for the path forward

Producing natural, sustainable products is a key aspect of Florida Tile's longstanding commitment to environmental accountability.

We know tangible actions must start from the basics, from the spaces in which we live, from the decisions we make. That's why a focus on improving the well-being of people and the environment begins with choosing sustainable construction materials.

We use pre-consumer recycled content in all products produced in Kentucky and are proudly recognized as a Green Squared Certified


Manufacturing Facility by UL Environment. We were the first tile manufacturer to have all products GREENGUARD® certified for low VOC emissions.

*Quick access to our certifications and documentation can be found on our website under the Sustainability and Resources tabs.*



# WHAT MAKES FLORIDA TILE PRODUCTS GREEN:

- Abundant Raw Materials Located Regionally
- Ingredient Reclamation
- Zero VOCs
- Solar Reflectance and Thermal Mass
- Durability & Low Life Cycle Cost
- Hypo-Allergenicity
- Resistance To Mold & Mildew

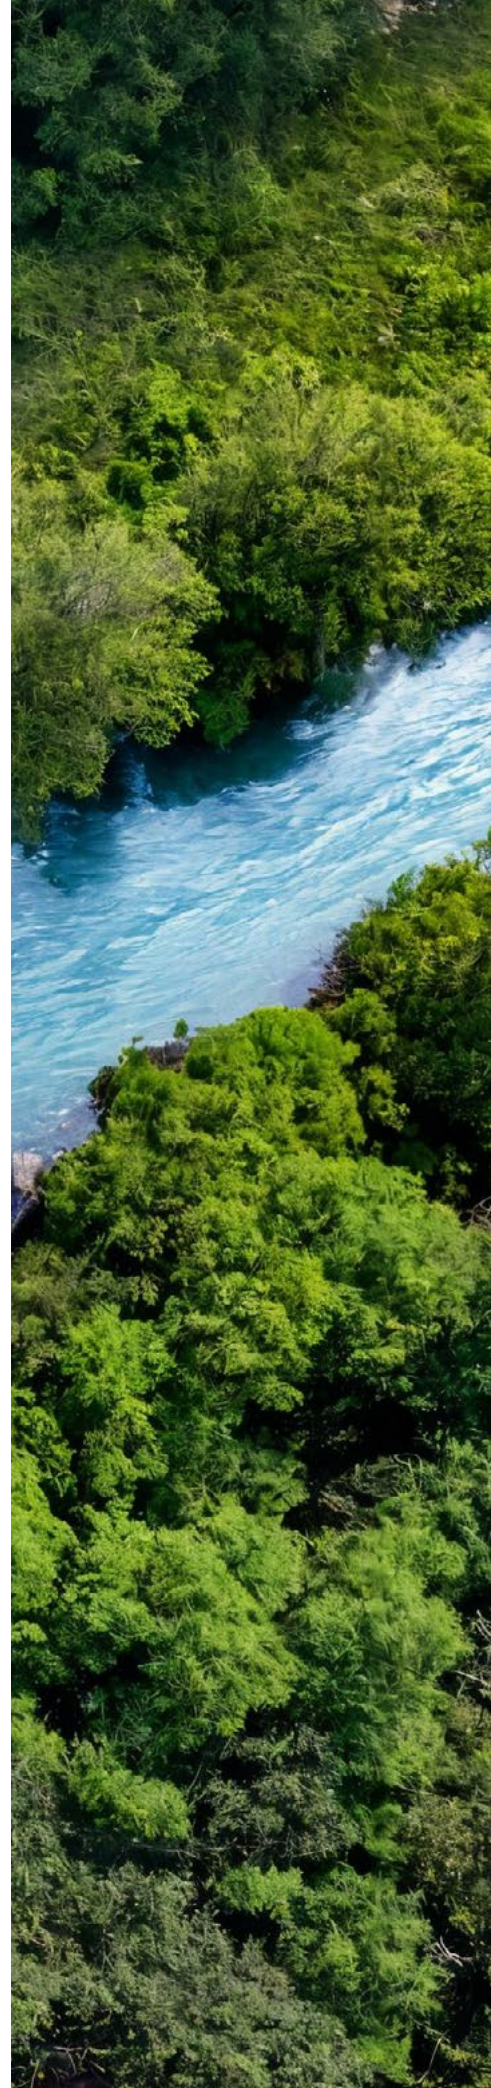

# ALPHABETICAL INDEX

## REFERENCES

|                           |    |
|---------------------------|----|
| <b>WHO WE ARE</b>         | 2  |
| <b>ALPHABETICAL INDEX</b> | 6  |
| <b>INDEX BY LOOK</b>      | 7  |
| <b>PRODUCT INDEX</b>      | 8  |
| <b>FORMAT INDEX</b>       | 9  |
| <b>COLOR INDEX</b>        | 10 |
| WHITE, GRAY & BLACK       | 10 |
| BEIGE, BROWN & TAUPE      | 11 |
| YELLOW, OCHRE, RED & PINK | 12 |
| BLUE & GREEN              | 12 |
| METALLIC                  | 13 |
| <b>TRIM INDEX</b>         | 13 |

## COLLECTIONS

|                             |    |
|-----------------------------|----|
| <b>PORCELAIN / CERAMIC</b>  |    |
| AINSLEE PARK                | 14 |
| ALUSTRA                     | 16 |
| AVENTIS                     | 18 |
| BAKERSFIELD                 | 20 |
| BELLANOVA                   | 22 |
| BERKSHIRE                   | 24 |
| CANAL STREET                | 26 |
| CELLAR                      | 28 |
| CONTINENT                   | 30 |
| DIVINITY                    | 32 |
| EAST VILLAGE                | 34 |
| ENCHANT                     | 36 |
| GRAVITATE                   | 38 |
| HIGH RIDGE                  | 40 |
| INDULGE                     | 42 |
| MAGNOLIA                    | 44 |
| NATURA                      | 46 |
| NY2LA                       | 48 |
| PASSENGER                   | 50 |
| PRECIOUS                    | 52 |
| RHYME                       | 54 |
| SEQUENCE                    | 56 |
| SERENDIPITY                 | 58 |
| TUSCAN VILLA                | 60 |
| URBAN FOUNDRY               | 62 |
| WESTMONT                    | 64 |
| <b>2CM PORCELAIN PAVERS</b> | 66 |
| HIGH RIDGE                  | 68 |
| MINERAL                     | 70 |
| NY2LA                       | 72 |
| PASSENGER                   | 74 |
| SPAN                        | 76 |

## GENERAL INFORMATION

|   |    |
|---|----|
| <b>FLORIDA TILE INTERNET SALES POLICY</b> | 78 |
| <b>TILE VISUALIZER</b>                    | 78 |
| <b>ICON &amp; REFERENCE GUIDE</b>         | 79 |
| <b>SUSTAINABILITY</b>                     | 80 |
| <b>MICROBAN®</b>                          | 82 |
| <b>CONTINUING EDUCATION</b>               | 83 |
| <b>CARE &amp; MAINTENANCE</b>             | 84 |
| <b>TECHNICAL DATA</b>                     | 86 |
| <b>INTENDED USE</b>                       | 88 |
| <b>PRODUCT USE CLASSIFICATIONS</b>        | 89 |
| <b>WARRANTY</b>                           | 90 |
| <b>SAMPLE ORDERING</b>                    | 91 |
| <b>PANARIAGROUP</b>                       | 92 |
| <b>PANARIAGROUP USA</b>                   | 93 |
| <b>BRANCH LOCATIONS</b>                   | 94 |



# INDEX BY LOOK

## DESIGN BY LOOK

### ■ CONCRETE

|                  |    |
|------------------|----|
| AVENTIS          | 18 |
| CANAL STREET     | 26 |
| EAST VILLAGE     | 34 |
| NY2LA            | 48 |
| NY2LA <b>2CM</b> | 72 |
| SERENDIPITY      | 58 |

### ■ FABRIC

|       |    |
|-------|----|
| RHYME | 54 |
|-------|----|

### ■ MARBLE

|              |    |
|--------------|----|
| AINSLEE PARK | 14 |
| ALUSTRA      | 16 |
| BAKERSFIELD  | 20 |
| ENCHANT      | 36 |
| INDULGE      | 42 |
| PRECIOUS     | 52 |

### ■ METAL

|               |    |
|---------------|----|
| URBAN FOUNDRY | 62 |
|---------------|----|

### ■ STONE

|                       |    |
|-----------------------|----|
| CONTINENT             | 30 |
| DIVINITY              | 32 |
| GRAVITATE             | 38 |
| HIGH RIDGE            | 40 |
| HIGH RIDGE <b>2CM</b> | 68 |
| MINERAL <b>2CM</b>    | 70 |
| PASSENGER             | 50 |
| PASSENGER <b>2CM</b>  | 74 |
| SEQUENCE              | 56 |
| SPAN <b>2CM</b>       | 76 |
| TUSCAN VILLA          | 50 |
| WESTMONT              | 64 |

### ■ WOOD

|           |    |
|-----------|----|
| BELLANOVA | 22 |
| BERKSHIRE | 24 |
| CELLAR    | 28 |
| MAGNOLIA  | 44 |
| NATURA    | 46 |

2CM = 2CM Porcelain Pavers

# PRODUCT INDEX

| Page | Collection Name | Made in USA | ANSI® A326.3 | Body Type | Recycled Content | Shade Variation | Break Strength (lb. avg.) | Surface Hardness (mohs) | Water Absorption | Microban® | Rectified Tile | Cove Base | Mosaic | Bullnose |
|------|-----------------|-------------|--------------|-----------|------------------|-----------------|---------------------------|-------------------------|------------------|-----------|----------------|-----------|--------|----------|
|------|-----------------|-------------|--------------|-----------|------------------|-----------------|---------------------------|-------------------------|------------------|-----------|----------------|-----------|--------|----------|

## PORCELAIN / CERAMIC

|    |               |   |          |                |   |    |                    |                     |        |   |   |   |   |   |
|----|---------------|---|----------|----------------|---|----|--------------------|---------------------|--------|---|---|---|---|---|
| 14 | Ainslee Park  | ■ | IW+      | g <sup>1</sup> | ■ | V2 | ≥ 450              | 7 mohs              | ≤ 0.5% |   |   |   | ■ | ■ |
| 16 | Alustra       | ■ | IW+ / ID | cb             | ■ | V3 | ≥ 450              | 7 mohs              | ≤ 0.5% | ■ | ■ |   | ■ | ■ |
| 18 | Aventis       | ■ | IW+      | cb             | ■ | V2 | ≥ 410              | 7 mohs              | ≤ 0.5% |   | ■ |   | ■ | ■ |
| 20 | Bakersfield   | ■ | IW+      | g              | ■ | V2 | ≥ 350              | 7 mohs              | ≤ 0.5% |   |   |   | ■ | ■ |
| 22 | Bellanova     | ■ | IW+      | cb             | ■ | V3 | ≥ 450              | 7 mohs              | ≤ 0.5% | ■ | ■ |   | ■ |   |
| 24 | Berkshire     | ■ | IW / IW+ | cb             | ■ | V2 | ≥ 474              | 7 mohs              | ≤ 0.5% |   |   |   | ■ | ■ |
| 26 | Canal Street  | ■ | IW+      | cb             | ■ | V3 | ≥ 450              | 7 mohs              | ≤ 0.5% | ■ | ■ |   | ■ | ■ |
| 28 | Cellar        | ■ | IW+      | cb             | ■ | V4 | ≥ 460              | 7 mohs              | ≤ 0.5% |   |   |   | ■ |   |
| 30 | Continent     | ■ | IW+      | g              | ■ | V2 | ≥ 365              | 7 mohs              | ≤ 0.5% |   |   | ■ | ■ | ■ |
| 32 | Divinity      | ■ | IW+      | cb             | ■ | V3 | ≥ 456              | 7 mohs              | ≤ 0.5% | ■ | ■ |   | ■ | ■ |
| 34 | East Village  | ■ | IW / IW+ | cb             | ■ | V2 | ≥ 410              | 7 mohs              | ≤ 0.5% | ■ | ■ |   | ■ | ■ |
| 36 | Enchant       | ■ | IW+ / ID | g              | ■ | V3 | ≥ 396 <sup>1</sup> | 7 mohs <sup>1</sup> | ≤ 0.5% |   | ■ |   | ■ | ■ |
| 38 | Gravitate     | ■ | IW+      | g              | ■ | V3 | ≥ 450              | 7 mohs              | ≤ 0.5% | ■ |   |   | ■ | ■ |
| 40 | High Ridge    | ■ | IW+      | g              | ■ | V3 | ≥ 450              | 7 mohs              | ≤ 0.5% | ■ |   |   | ■ | ■ |
| 42 | Indulge       | ■ | IW+ / ID | cb             | ■ | V3 | ≥ 450              | 7 mohs              | ≤ 0.5% | ■ | ■ |   | ■ | ■ |
| 44 | Magnolia      | ■ | IW       | cb             | ■ | V2 | ≥ 420              | 7 mohs              | ≤ 0.5% |   |   |   |   |   |
| 46 | Natura        | ■ | IW       | cb             | ■ | V2 | ≥ 493              | 7 mohs              | ≤ 0.5% |   |   |   |   | ■ |
| 48 | NY2LA         | ■ | IW+      | cb             | ■ | V2 | ≥ 450              | 7 mohs              | ≤ 0.5% | ■ | ■ |   | ■ | ■ |
| 50 | Passenger     | ■ | IW+      | cb             | ■ | V3 | ≥ 450              | 7 mohs              | ≤ 0.5% | ■ | ■ |   | ■ | ■ |
| 52 | Precious      | ■ | IW+      | g <sup>1</sup> | ■ | V2 | ≥ 440              | 7 mohs              | ≤ 0.5% |   | ■ |   | ■ | ■ |
| 54 | Rhyme         | ■ | IW+      | cb             | ■ | V1 | ≥ 465              | 7 mohs              | ≤ 0.5% |   |   |   | ■ | ■ |
| 56 | Sequence      | ■ | IW+      | cb             | ■ | V2 | ≥ 490              | 7 mohs              | ≤ 0.5% | ■ | ■ |   | ■ | ■ |
| 58 | Serendipity   | ■ | IW+      | cb             | ■ | V2 | ≥ 450              | 7 mohs              | ≤ 0.5% | ■ | ■ | ■ | ■ | ■ |
| 60 | Tuscan Villa  | ■ | IW / IW+ | g              | ■ | V3 | ≥ 253 <sup>1</sup> | 7 mohs              | ≤ 0.5% |   |   |   | ■ | ■ |
| 62 | Urban Foundry | ■ | IW / IW+ | cb             | ■ | V3 | ≥ 400              | 7 mohs              | ≤ 0.5% |   |   |   | ■ | ■ |
| 64 | Westmont      | ■ | IW+      | g              | ■ | V2 | ≥ 260              | 7 mohs              | ≤ 0.5% |   |   |   | ■ | ■ |

## 2CM PORCELAIN PAVERS

|    |            |   |    |    |   |         |        |        |        |  |  |  |  |  |
|----|------------|---|----|----|---|---------|--------|--------|--------|--|--|--|--|--|
| 68 | High Ridge | ■ | EW | cb | ■ | V3      | ≥ 2800 | 7 mohs | ≤ 0.5% |  |  |  |  |  |
| 70 | Mineral    | ■ | EW | cb | ■ | V2 / V3 | ≥ 2800 | 7 mohs | ≤ 0.5% |  |  |  |  |  |
| 72 | NY2LA      | ■ | EW | cb | ■ | V2      | ≥ 2800 | 7 mohs | ≤ 0.5% |  |  |  |  |  |
| 74 | Passenger  | ■ | EW | cb | ■ | V3      | ≥ 2800 | 7 mohs | ≤ 0.5% |  |  |  |  |  |
| 76 | Span       | ■ | EW | cb | ■ | V2      | ≥ 2800 | 7 mohs | ≤ 0.5% |  |  |  |  |  |

note: Results shown may not apply to all formats, colors, or finishes.

<sup>1</sup> Check product page for more information.

ID = Interior, Dry    IW = Interior, Wet    IW+ = Interior, Wet Plus    EW = Exterior, Wet

cb = color body    g = glazed



# FORMAT INDEX























































| Page     | Collection Name           | 3.75 x 12 | 4x21 Chevron | 6 x 24 | 8 x 36 | 8 x 48 | 12 x 12 | 12 x 24 | 14 x 27 | 14 x 39 | 21.5 x 29.5 Poly | 22.5 x 22.5 Hex | 24 x 24 | 24 x 36 | 24 x 48 | 36 x 36 |
|----------|---------------------------|-----------|--------------|--------|--------|--------|---------|---------|---------|---------|------------------|-----------------|---------|---------|---------|---------|
| CONCRETE |                           |           |              |        |        |        |         |         |         |         |                  |                 |         |         |         |         |
| 18       | Aventis                   |           |              |        |        |        |         | ■       |         |         |                  |                 |         |         |         |         |
| 26       | Canal Street              |           |              |        |        | ■      |         | ■       |         |         |                  |                 |         |         | ■       |         |
| 34       | East Village              | ■         |              |        |        |        |         | ■       |         |         |                  | ■               |         |         | ■       |         |
| 48       | NY2LA                     | ■         |              |        |        |        |         | ■       |         |         | ■                |                 | ■       |         |         |         |
| 72       | NY2LA 2CM                 |           |              |        |        |        |         |         |         |         |                  |                 | ■       |         |         |         |
| 58       | Serendipity               |           |              |        |        |        |         | ■       |         |         |                  |                 |         |         |         |         |
| FABRIC   |                           |           |              |        |        |        |         |         |         |         |                  |                 |         |         |         |         |
| 54       | Rhyme                     | ■         |              |        |        |        |         | ■       |         |         |                  |                 |         |         |         |         |
| MARBLE   |                           |           |              |        |        |        |         |         |         |         |                  |                 |         |         |         |         |
| 14       | Ainslee Park <sup>1</sup> | ■         |              |        |        |        | ■       | ■       |         |         |                  |                 |         |         |         |         |
| 16       | Alustra                   |           |              |        |        |        |         | ■       |         |         |                  |                 | ■       |         | ■       |         |
| 20       | Bakersfield               |           |              |        |        |        | ■       | ■       |         |         |                  |                 |         |         |         |         |
| 36       | Enchant                   | ■         |              |        |        |        |         | ■       |         |         |                  |                 |         |         |         |         |
| 42       | Indulge                   |           | ■            |        |        |        |         | ■       |         |         |                  |                 |         |         | ■       | ■       |
| 52       | Precious <sup>1</sup>     |           |              |        |        |        |         | ■       | ■       | ■       |                  |                 |         |         | ■       |         |
| METAL    |                           |           |              |        |        |        |         |         |         |         |                  |                 |         |         |         |         |
| 62       | Urban Foundry             |           |              |        |        |        |         | ■       |         |         |                  |                 |         |         |         |         |
| STONE    |                           |           |              |        |        |        |         |         |         |         |                  |                 |         |         |         |         |
| 30       | Continent                 |           |              |        |        |        | ■       | ■       |         |         |                  |                 |         |         |         |         |
| 32       | Divinity                  |           |              |        |        |        |         | ■       |         |         |                  |                 |         |         |         |         |
| 38       | Gravitate                 |           |              |        |        |        |         | ■       |         |         |                  |                 |         |         |         |         |
| 40       | High Ridge                |           |              |        |        |        | ■       | ■       |         |         |                  |                 |         |         |         |         |
| 68       | High Ridge 2CM            |           |              |        |        |        |         |         |         |         |                  |                 |         | ■       |         |         |
| 70       | Mineral 2CM               |           |              |        |        |        |         |         |         |         |                  |                 | ■       |         |         |         |
| 50       | Passenger                 |           |              |        |        |        |         | ■       |         |         |                  |                 | ■       |         |         |         |
| 74       | Passenger 2CM             |           |              |        |        |        |         |         |         |         |                  |                 |         | ■       |         |         |
| 56       | Sequence                  | ■         |              |        |        |        |         | ■       |         |         |                  |                 |         |         | ■       |         |
| 76       | Span 2CM                  |           |              |        |        |        |         |         |         |         |                  |                 | ■       |         |         |         |
| 60       | Tuscan Villa              |           |              |        |        |        | ■       | ■       |         |         |                  |                 |         |         |         |         |
| 64       | Westmont                  |           |              |        |        |        | ■       | ■       |         |         |                  |                 |         |         |         |         |
| WOOD     |                           |           |              |        |        |        |         |         |         |         |                  |                 |         |         |         |         |
| 22       | Bellanova                 |           |              |        |        | ■      |         |         |         |         |                  |                 |         |         |         |         |
| 24       | Berkshire                 |           |              | ■      | ■      |        |         |         |         |         |                  |                 |         |         |         |         |
| 28       | Cellar                    |           |              |        | ■      |        |         |         |         |         |                  |                 |         |         |         |         |
| 44       | Magnolia                  |           |              |        | ■      |        |         |         |         |         |                  |                 |         |         |         |         |
| 46       | Natura                    |           |              | ■      |        |        |         |         |         |         |                  |                 |         |         |         |         |

<sup>1</sup> See collection page for additional formats

2CM = 2CM Porcelain Pavers

# COLOR INDEX








## WHITE, GRAY & BLACK

|  |   |   |  |   |   |
|--|---|---|--|---|---|
|    |    |    |    |    |    |
| <b>RHYME</b><br><b>28503</b><br>Ivory Staccato                                     | <b>NY2LA</b><br><b>NY210 &amp; NY210U</b><br>Malibu White                           | <b>PRECIOUS</b><br><b>35001</b><br>Calacatta*                                       | <b>INDULGE</b><br><b>IND20 &amp; IND20P</b><br>Statuario                             | <b>AINSLEE PARK</b><br><b>AIN10 &amp; AIN1W</b><br>Calacatta Gold                     | <b>INDULGE</b><br><b>IND10 &amp; IND10P</b><br>Onyx                                   |
|    |    |    |    |    |    |
| <b>INDULGE</b><br><b>IND40 &amp; IND40P</b><br>Lilac                               | <b>INDULGE</b><br><b>IND30 &amp; IND30P</b><br>Arabescato                           | <b>INDULGE</b><br><b>IND50 &amp; IND50P</b><br>Breccia Capraia                      | <b>2CM SPAN</b><br><b>SPN01U</b><br>Snow   | <b>CANAL STREET</b><br><b>CST10</b><br>Levee White                                    | <b>CELLAR</b><br><b>34310</b><br>Bleach   |
|    |    |    |    |    |    |
| <b>HIGH RIDGE</b><br><b>HRG10 &amp; HRG10U</b><br>Stardust White                   | <b>ENCHANT</b><br><b>ENC10 &amp; ENC1P</b><br>Honesty                               | <b>ALUSTRA</b><br><b>ALU20 &amp; ALU20P</b><br>Imperial Gold Calacatta              | <b>EAST VILLAGE</b><br><b>EVG10</b><br>Avenue A Gray                                 | <b>ALUSTRA</b><br><b>ALU10 &amp; ALU10P</b><br>Majestic White Lasa                    | <b>RHYME</b><br><b>28513</b><br>Silver Melody   |
|    |    |    |    |    |    |
| <b>SERENDIPITY</b><br><b>SDP10</b><br>Fortune White                                | <b>PASSENGER</b><br><b>PSG10 &amp; PSG10U</b><br>Wander White                       | <b>CONTINENT</b><br><b>29914</b><br>Delta Haze                                      | <b>GRAVITATE</b><br><b>GVT10</b><br>White  | <b>2CM MINERAL</b><br><b>MIN10U</b><br>Alabaster                                      | <b>NY2LA</b><br><b>NY230 &amp; NY230U</b><br>Riverside Steel                          |
|  |  |  |  |  |  |
| <b>SEQUENCE</b><br><b>34915</b><br>Current   | <b>AINSLEE PARK</b><br><b>AIN40 &amp; AIN4W</b><br>Breccia Mist                     | <b>SERENDIPITY</b><br><b>SDP30</b><br>Infinite Cool Gray                            | <b>EAST VILLAGE</b><br><b>EVG20</b><br>E. Houston Warm Gray                          | <b>SEQUENCE</b><br><b>34901</b><br>Breeze   | <b>BELLANOVA</b><br><b>BNV10</b><br>Foam  |
|  |  |  |  |  |  |
| <b>BAKERSFIELD</b><br><b>89214</b><br>Pumice                                       | <b>TUSCAN VILLA</b><br><b>TUV30</b><br>Florence Silver                              | <b>CANAL STREET</b><br><b>CST20</b><br>Café Light Gray                              | <b>ENCHANT</b><br><b>ENC30 &amp; ENC3P</b><br>Beauty                                 | <b>GRAVITATE</b><br><b>GVT30</b><br>Gray  | <b>WESTMONT</b><br><b>89103</b><br>Quarry   |
|  |  |  |  |  |  |
| <b>PASSENGER</b><br><b>PSG40 &amp; PSG40U</b><br>Leisure Gray                      | <b>MAGNOLIA</b><br><b>28315</b><br>Ash  | <b>CANAL STREET</b><br><b>CST30</b><br>French Gray                                  | <b>AVENTIS</b><br><b>AT3</b><br>Titanium   | <b>HIGH RIDGE</b><br><b>HRG30 &amp; HRG30U</b><br>Rockwall Gray                       | <b>2CM MINERAL</b><br><b>MIN30U</b><br>Feldspar                                       |
|  |  |  |  |  |  |
| <b>2CM SPAN</b><br><b>SPN13U</b><br>Silver   | <b>NATURA</b><br><b>28013</b><br>Nantucket Gray                                     | <b>NY2LA</b><br><b>NY260</b><br>Gramercy Gray                                       | <b>CELLAR</b><br><b>34316</b><br>Char  | <b>DIVINITY</b><br><b>DIV30</b><br>Mist   | <b>ALUSTRA</b><br><b>ALU40 &amp; ALU40P</b><br>Sovereign Gray                         |
|  |  |  |  |  |  |
| <b>DIVINITY</b><br><b>DIV40</b><br>Dusk  | <b>AVENTIS</b><br><b>AT2</b><br>Velvet  | <b>AVENTIS</b><br><b>AT1</b><br>Ask   | <b>CANAL STREET</b><br><b>CST50</b><br>Black Bayou                                   | <b>EAST VILLAGE</b><br><b>EVG40</b><br>Stuyvesant Charcoal                            | <b>NATURA</b><br><b>28017</b><br>Cape Cod Charcoal                                    |




































# COLOR INDEX

## WHITE, GRAY & BLACK CONT.

|  |   |   |  |   |   |
|--|---|---|--|---|---|
|  |  |  |  |  |  |
| <b>AVENTIS</b><br><b>AT0</b><br>Eclipse  | <b>SERENDIPITY</b><br><b>SDP40</b><br>Fate Warm Gray                              | <b>NY2LA</b><br><b>NY240</b><br>Chelsea Black                                     | <b>SERENDIPITY</b><br><b>SDP70</b><br>Destiny Black                                | <b>HIGH RIDGE</b><br><b>HRG50</b><br>Nightfall Black                                | <b>ALUSTRA</b><br><b>ALU50 &amp; ALU50P</b><br>Regal Black                          |
|  |   |   |  |   |   |
| <b>INDULGE</b><br><b>IND60P</b><br>Sahara Noir                                   |   |   |  |   |   |


## BEIGE, BROWN & TAUPE

|  |   |   |  |   |   |
|--|---|---|--|---|---|
|    |    |    |    |    |    |
| <b>AVENTIS</b><br><b>AT55</b><br>Cotton  | <b>NATURA</b><br><b>28004</b><br>Wilmington White                                   | <b>AINSLEE PARK</b><br><b>AIN20 &amp; AIN2W</b><br>Emperador Beige                  | <b>TUSCAN VILLA</b><br><b>TUV10</b><br>Arezzo Ivory                                  | <b>AINSLEE PARK</b><br><b>AIN30 &amp; AIN3W</b><br>Zebrino Taupe                      | <b>RHYME</b><br><b>28532</b><br>Desert Harmony  |
|  |  |  |  |  |  |
| <b>TUSCAN VILLA</b><br><b>TUV20</b><br>Cortona Beige                               | <b>NY2LA</b><br><b>NY250</b><br>Tribeca Taupe                                       | <b>NY2LA</b><br><b>NY220 &amp; NY220U</b><br>Brentwood Beige                        | <b>NATURA</b><br><b>28034</b><br>Hampton Blonde                                      | <b>DIVINITY</b><br><b>DIV10</b><br>Dawn   | <b>BAKERSFIELD</b><br><b>89204</b><br>Eggshell  |
|  |  |  |  |  |  |
| <b>HIGH RIDGE</b><br><b>HRG20 &amp; HRG20U</b><br>Pinnacle Beige                   | <b>2CM MINERAL</b><br><b>MIN20U</b><br>Quartz                                       | <b>PASSENGER</b><br><b>PSG30 &amp; PSG30U</b><br>Everywhere Greige                  | <b>BELLANOVA</b><br><b>BNV20</b><br>Crema  | <b>SERENDIPITY</b><br><b>SDP20</b><br>Spontaneous Beige                               | <b>PASSENGER</b><br><b>PSG20 &amp; PSG20U</b><br>Anywhere Beige                       |
|  |  |  |  |  |  |
| <b>CONTINENT</b><br><b>29936</b><br>Coastal Sand                                   | <b>MAGNOLIA</b><br><b>28338</b><br>Fir  | <b>BAKERSFIELD</b><br><b>89233</b><br>Wicker  | <b>GRAVITATE</b><br><b>GVT20</b><br>Beige  | <b>WESTMONT</b><br><b>89132</b><br>Sand   | <b>GRAVITATE</b><br><b>GVT40</b><br>Natural   |
|  |  |  |  |  |  |
| <b>MAGNOLIA</b><br><b>28327</b><br>Chestnut  | <b>ALUSTRA</b><br><b>ALU30 &amp; ALU30P</b><br>Opulent Beige Onyx                   | <b>RHYME</b><br><b>28593</b><br>Stone Chamber                                       | <b>SEQUENCE</b><br><b>34938</b><br>Drift   | <b>WESTMONT</b><br><b>89123</b><br>Clay   | <b>CANAL STREET</b><br><b>CST40</b><br>Spanish Clay                                   |
|  |  |  |  |  |  |
| <b>NATURA</b><br><b>28092</b><br>Charleston Brown                                  | <b>ENCHANT</b><br><b>ENC40 &amp; ENC4P</b><br>Charm                                 | <b>HIGH RIDGE</b><br><b>HRG40</b><br>Deep Taupe                                     | <b>SERENDIPITY</b><br><b>SDP60</b><br>Intuition Tobacco                              | <b>BELLANOVA</b><br><b>BNV40</b><br>Macchiato   | <b>HIGH RIDGE</b><br><b>HRG60 &amp; HRG60U</b><br>Canyon Slate                        |

# COLOR INDEX


## BEIGE, BROWN & TAUPE CONT.

---

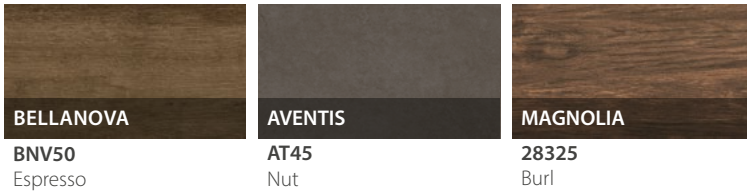

## YELLOW, OCHRE, RED & PINK

---

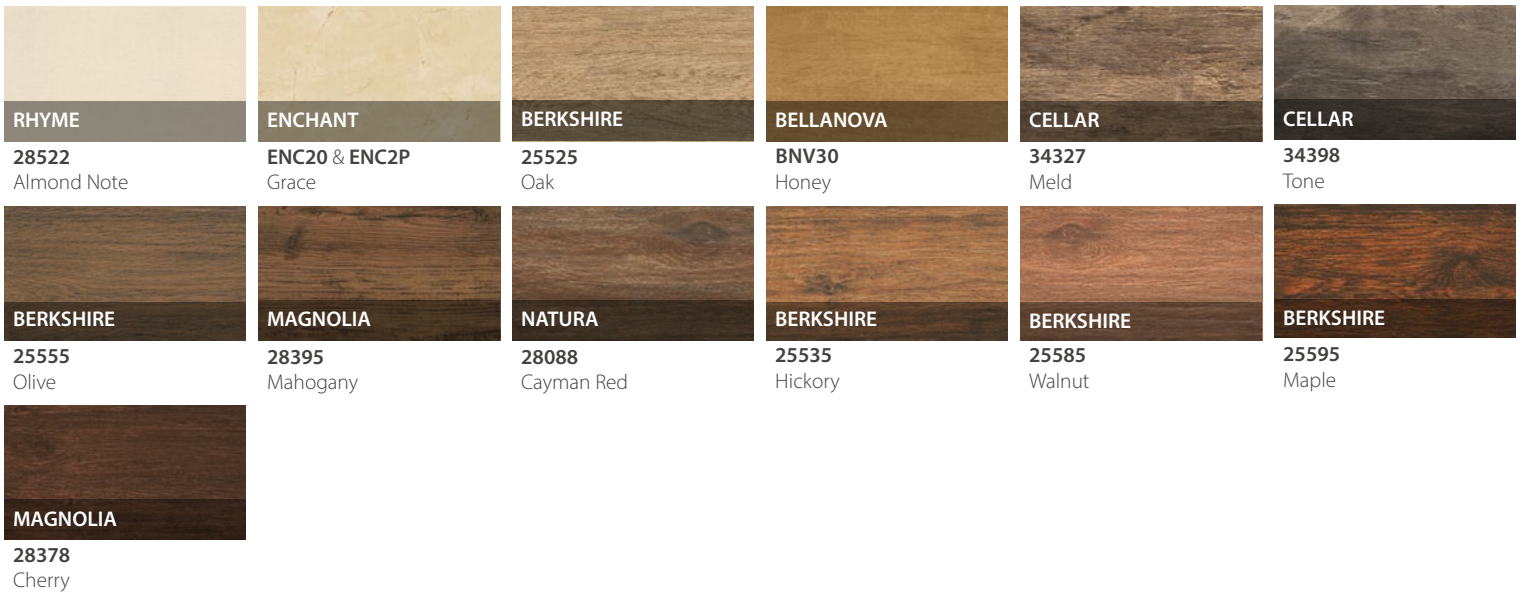

## BLUE & GREEN





---





# COLOR INDEX

## METALLIC





|  |   |   |  |
|--|---|---|--|
|  |  |  |  |
| <b>URBAN FOUNDRY</b><br><b>FDY10</b><br>Alumina                                  | <b>URBAN FOUNDRY</b><br><b>FDY20</b><br>Cast Nickel                               | <b>URBAN FOUNDRY</b><br><b>FDY30</b><br>Graphite                                  | <b>URBAN FOUNDRY</b><br><b>FDY40</b><br>Iron Oxide                                 |

note: Color reproductions in this piece may vary from actual tile colors. Final selection should be made from actual tile samples.

\* See collection page for additional skus and finishes.

# TRIM INDEX



## BULLNOSE


|   |   |  |  |
|---|---|--|--|
|  |  |   |    |
| <b>S43C9 3x12 (7.5x30 cm)</b><br>Ainslee Park                                       | <b>SN4339 3x3 (7.5x7.5 cm)</b><br>Ainslee Park                                      | <b>P43C9 3x12 (7.5x30 cm)</b><br>Ainslee Park, Aventis,<br>Bakersfield, Continent,<br>Enchant, High Ridge, Rhyme,<br>Tuscan Villa & Westmont | <b>P43N9 3x24 (7.5x60 cm)</b><br>Alustra, Berkshire, Canal<br>Street, Divinity, East Village,<br>Gravitate, Indulge, Natura,<br>NY2LA, Passenger, Sequence,<br>Serendipity & Urban Foundry |

## CHAIR RAILS & CHAIR RAIL STOPS


|  |   |  |   |
|--|---|--|---|
| <b>CR2x12 (5x30 cm)</b><br>Chair Rail<br>Continent | <b>CR1.7x14 (4.2x35.5 cm)</b><br>Chair Rail<br>Precious | <b>CRS2x1 (5x2.5 cm)</b><br>Chair Rail Stop<br>Continent | <b>CRS1.7x1 (4.2x2.5 cm)</b><br>Chair Rail Stop<br>Precious |
|--|---|--|---|

## COVE BASES & QUARTER ROUNDS

|   |   |
|---|---|
|  |  |
| <b>P36C9 6x12 (15x30 cm)</b><br>Continent & Serendipity                               | <b>PB3169 6x1 (15x2.5 cm)</b><br>Continent & Serendipity                              |




**AIN10**  
**AIN1W** Ceramic Glossy Wall  
Calacatta Gold



**AIN20**  
**AIN2W** Ceramic Glossy Wall  
Emperador Beige




**AIN30**  
**AIN3W** Ceramic Glossy Wall  
Zebrino Taupe



**AIN40**  
**AIN4W** Ceramic Glossy Wall  
Breccia Mist

## FIELD TILE FORMATS




## MOSAICS & LISTELLOS




**AIN10/M122**  
Calacatta Gold 36pc



**AIN20/M122**  
Emperador Beige 36pc




**AIN30/M1x6STK**  
Zebrino Taupe Stack



**AIN40/M122**  
Breccia Mist 36pc



**AIN55/M4x4HEX**  
Hexagon Mix  
(Calacatta Gold & Breccia Mist)



**AIN00/L2x12** (wall only)  
Brass



**AIN01/L2x12** (wall only)  
Steel

## TRIMS



**P43C9 3x12**  
Bullnose



**S43C9 3x12**  
Bullnose  
(ceramic wall)



**SN4339 3x3**  
Outside Corner  
(ceramic wall)  
(not available in Zebrino Taupe)



above: **AIN1W 12.1x24.4** Calacatta Gold (ceramic glossy wall) & **AIN10 12x24** Calacatta Gold

| PORCELAIN TECHNICAL DATA       |  |  |  |
|--------------------------------|--|--|--|
| Country of Origin <sup>1</sup> | USA  | Breaking Strength  | ≥ 450 lbf. avg.  |
| ANSI® A326.3 <sup>2</sup>      | Interior, Wet Plus (IW+)                                 | Water Absorption   | ≤ 0.5% <sup>3</sup>  |
| Recycled Content               | 40%  | Edge   | <b>Rectified</b> (3.75x12)<br><b>Pressed</b> (all other formats) |
| Surface Hardness               | 7 Mohs   | Intended Use <sup>4</sup>  | Residential, Light Commercial & Heavy Commercial                 |
| Thickness                      | 8mm (3.75x12 & 12x12)<br>9mm (12x24)<br>7mm (12.1x24.4l) | <sup>1</sup> Origin refers to porcelain field tile only<br><sup>2</sup> See page 189 for more details<br><sup>3</sup> Average production value<br><sup>4</sup> See page 188 for more details |  |
| Shade Variation                | V2 - Slight Variation                                    |  |  |

note: Product specifications are subject to change. See Technical Data section on page 186 for details.




**Declare.** \*porcelain only







**ALU10**  
**ALU10P** Polished  
Majestic White Lasa




**ALU20**  
**ALU20P** Polished  
Imperial Gold Calacatta



**ALU30**  
**ALU30P** Polished  
Opulent Beige Onyx




**ALU40**  
**ALU40P** Polished  
Sovereign Gray



**ALU50**  
**ALU50P** Polished  
Regal Black

## FIELD TILE FORMATS

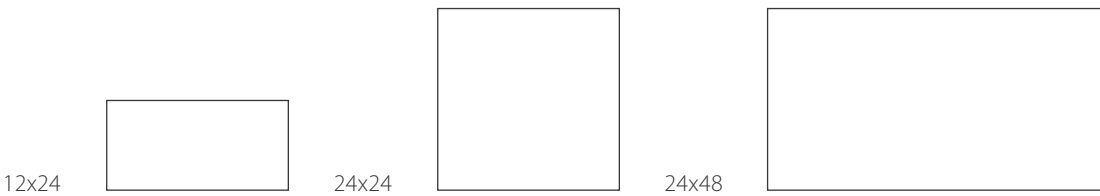

## MOSAICS & LINERS




**ALU10P/M4x6ARCH**  
Majestic White Lasa Arch




**ALU20P/M4x6ARCH**  
Imperial Gold Calacatta Arch



**ALU30P/M4x6ARCH**  
Opulent Beige Onyx Arch




**ALU40P/M4x6ARCH**  
Sovereign Gray Arch



**ALU50P/M4x6ARCH**  
Regal Black Arch




**ALU10/M2x6CHEV**  
**ALU10P/M2x6CHEV**  
Majestic White Lasa  
Chevron



**ALU20/M2x6CHEV**  
**ALU20P/M2x6CHEV**  
Imperial Gold Calacatta  
Chevron



**ALU30/M2x6CHEV**  
**ALU30P/M2x6CHEV**  
Opulent Beige Onyx  
Chevron



**ALU40/M2x6CHEV**  
**ALU40P/M2x6CHEV**  
Sovereign Gray Chevron



**ALU50/M2x6CHEV**  
**ALU50P/M2x6CHEV**  
Regal Black Chevron



**ALU10/M3x3HEX**  
**ALU10P/M3x3HEX**  
Majestic White Lasa  
Hexagon



**ALU20/M3x3HEX**  
**ALU20P/M3x3HEX**  
Imperial Gold Calacatta  
Hexagon



**ALU30/M3x3HEX**  
**ALU30P/M3x3HEX**  
Opulent Beige Onyx  
Hexagon




**ALU40/M3x3HEX**  
**ALU40P/M3x3HEX**  
Sovereign Gray Hexagon




**ALU50/M3x3HEX**  
**ALU50P/M3x3HEX**  
Regal Black Hexagon




above: **ALU20P/M4x6ARCH** Imperial Gold Calacatta Arch Mosaic (polished)




**ALU10/M12**  
Majestic White Lasa  
25pc Mosaic




**ALU20/M12**  
Imperial Gold Calacatta  
25pc Mosaic



**ALU30/M12**  
Opulent Beige Onyx  
25pc Mosaic



**ALU40/M12**  
Sovereign Gray  
25pc Mosaic



**ALU50/M12**  
Regal Black 25pc Mosaic



**ALU10P/L3/4x24\***  
Majestic White Lasa Inlay Wall Liner



**ALU20P/L3/4x24\***  
Imperial Gold Calacatta Inlay Wall Liner



**ALU30P/L3/4x24\***  
Opulent Beige Onyx Inlay Wall Liner



**ALU40P/L3/4x24\***  
Sovereign Gray Inlay Wall Liner



**ALU50P/L3/4x24\***  
Regal Black Inlay Wall Liner

\* Please reference installation guide for proper application of tile inlay wall liners.

## TRIMS




**P43N9 3x24**  
Bullnose (matte & polished)

## PORCELAIN TECHNICAL DATA


|                                      |   |   |                                |
|--------------------------------------|---|---|--------------------------------|
| <b>Country of Origin<sup>1</sup></b> | USA   | <b>Breaking Strength</b>                                | ≥ 450 lbf. avg.                |
| <b>ANSI® A326.3<sup>2</sup></b>      | <b>Matte</b> Interior, Wet Plus (IW+)<br><b>Polished</b> Interior, Dry (ID) | <b>Water Absorption</b>                                 | ≤ 0.5% <sup>3</sup>            |
| <b>Recycled Content</b>              | 40%   | <b>Edge</b>   | Rectified                      |
| <b>Surface Hardness</b>              | 7 Mohs  | <b>Intended Use<sup>4</sup></b>                         | Residential & Light Commercial |
| <b>Thickness</b>                     | 9mm   | <sup>1</sup> Origin refers to porcelain field tile only |                                |
| <b>Shade Variation</b>               | V3 - Moderate Variation   | <sup>2</sup> See page 189 for more details              |                                |
|                                      |   | <sup>3</sup> Average production value                   |                                |
|                                      |   | <sup>4</sup> See page 188 for more details              |                                |

note: Product specifications are subject to change. See Technical Data section on page 186 for details.





**AT5R**  
Cotton



**AT3R**  
Titanium



**AT1R**  
Ask



**AT2R**  
Velvet



**AT4R**  
Nut



**AT0R**  
Eclipse

## FIELD TILE FORMATS



12x24


## MOSAICS




**AT5R/M12**  
Cotton 25pc




**AT3R/M12**  
Titanium 25pc




**AT1R/M12**  
Ask 25pc



**AT2R/M12**  
Velvet 25pc




**AT4R/M12**  
Nut 25pc



**AT0R/M12**  
Eclipse 25pc

## TRIMS



**P43C9 3x12**  
Bullnose





above: **AT3R 12x24** Titanium (other formats: color reference only)

| PORCELAIN TECHNICAL DATA  |                          |   |  |
|---------------------------|--------------------------|---|--|
| Country of Origin         | USA                      | Breaking Strength   | ≥ 410 lbf. avg.                                  |
| ANSI® A326.3 <sup>1</sup> | Interior, Wet Plus (IW+) | Water Absorption  | ≤ 0.5% <sup>2</sup>                              |
| Recycled Content          | 40%                      | Edge  | Rectified  |
| Surface Hardness          | 7 Mohs                   | Intended Use <sup>3</sup>   | Residential, Light Commercial & Heavy Commercial |
| Thickness                 | 9mm                      | <sup>1</sup> See page 189 for more details<br><sup>2</sup> Average production value<br><sup>3</sup> See page 188 for more details |  |
| Shade Variation           | V2 - Slight Variation    |   |  |

note: Product specifications are subject to change. See Technical Data section on page 186 for details.






**89204**  
Eggshell



**89233**  
Wicker




**89214**  
Pumice

## FIELD TILE FORMATS



## MOSAICS



**89204/M12**  
Eggshell 25pc



**89233/M12**  
Wicker 25pc



**89214/M12**  
Pumice 25pc

## TRIMS



**P43C9 3x12**  
Bullnose



above: **89214 12x24 Pumice**

| PORCELAIN TECHNICAL DATA  |                            |   |                                |
|---------------------------|----------------------------|---|--------------------------------|
| Country of Origin         | USA                        | Breaking Strength   | ≥ 350 lbf. avg.                |
| ANSI® A326.3 <sup>1</sup> | Interior, Wet Plus (IW+)   | Water Absorption  | ≤ 0.5% <sup>2</sup>            |
| Recycled Content          | 40%                        | Edge  | Pressed                        |
| Surface Hardness          | 7 Mohs                     | Intended Use <sup>3</sup>   | Residential & Light Commercial |
| Thickness                 | 8mm (12x12)<br>9mm (12x24) | <sup>1</sup> See page 189 for more details<br><sup>2</sup> Average production value<br><sup>3</sup> See page 188 for more details |                                |
| Shade Variation           | V2 - Slight Variation      |   |                                |

note: Product specifications are subject to change. See Technical Data section on page 186 for details.







**BNV10 8x48**  
Foam



**BNV20 8x48**  
Crema



**BNV30 8x48**  
Honey



**BNV40 8x48**  
Macchiato



**BNV50 8x48**  
Espresso

## FIELD TILE FORMATS

8x48



## MOSAICS



**BNV10/M1x48LIN**  
Foam Linear Mosaic



**BNV20/M1x48LIN**  
Crema Linear Mosaic



**BNV30/M1x48LIN**  
Honey Linear Mosaic



**BNV40/M1x48LIN**  
Macchiato Linear Mosaic



**BNV50/M1x48LIN**  
Espresso Linear Mosaic



above: **BNV20 8x48** Crema & **BNV20/M1x48LIN** Crema Linear Mosaic

| PORCELAIN TECHNICAL DATA  |                          |  |  |
|---------------------------|--------------------------|--|--|
| Country of Origin         | USA                      | Breaking Strength                          | ≥ 450 lbf. avg.                                  |
| ANSI® A326.3 <sup>1</sup> | Interior, Wet Plus (IW+) | Water Absorption                           | ≤ 0.5% <sup>2</sup>                              |
| Recycled Content          | 40%                      | Edge                                       | Rectified  |
| Surface Hardness          | 7 Mohs                   | Intended Use <sup>3</sup>                  | Residential, Light Commercial & Heavy Commercial |
| Thickness                 | 9mm                      | <sup>1</sup> See page 189 for more details |  |
| Shade Variation           | V3 - Moderate Variation  | <sup>2</sup> Average production value      |  |
|                           |                          | <sup>3</sup> See page 188 for more details |  |

note: Product specifications are subject to change. See Technical Data section on page 186 for details.






**25525**  
Oak




**25535**  
Hickory

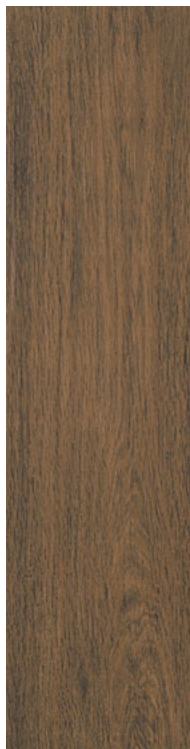

**25555**  
Olive



**25585**  
Walnut

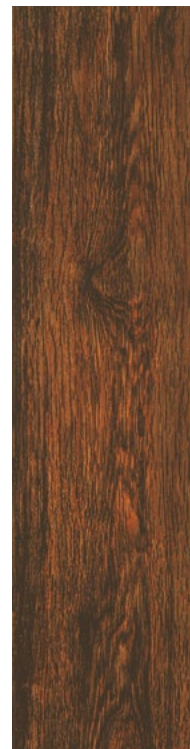

**25595**  
Maple

## FIELD TILE FORMATS

6x24



8x36



## MOSAICS




**25525/M12REC**  
Oak Parquet




**25535/M12REC**  
Hickory Parquet



**25555/M12REC**  
Olive Parquet



**25585/M12REC**  
Walnut Parquet



**25595/M12REC**  
Maple Parquet

## TRIMS



**P43N9 3x24**  
Bullnose





above: **25535 6x24 Hickory**


| PORCELAIN TECHNICAL DATA  |   |  |                                |
|---------------------------|---|--|--------------------------------|
| Country of Origin         | USA   | Breaking Strength                          | ≥ 474 lbf. avg.                |
| ANSI® A326.3 <sup>1</sup> | Interior, Wet (IW)<br><b>Mosaics</b> Interior, Wet Plus (IW+) | Water Absorption                           | ≤ 0.5% <sup>2</sup>            |
| Recycled Content          | 40%   | Edge                                       | Pressed                        |
| Surface Hardness          | 7 Mohs  | Intended Use <sup>3</sup>                  | Residential & Light Commercial |
| Thickness                 | 9mm   | <sup>1</sup> See page 189 for more details |                                |
| Shade Variation           | V2 - Slight Variation   | <sup>2</sup> Average production value      |                                |
|                           |   | <sup>3</sup> See page 188 for more details |                                |

note: Product specifications are subject to change. See Technical Data section on page 186 for details.






**CST10**  
Levee White



**CST20**  
Café Light Gray



**CST30**  
French Gray



**CST40**  
Spanish Clay



**CST50**  
Black Bayou



**CST12D 12x24**  
Light Deco



**CST35D 12x24**  
Dark Deco



**CST44D 12x24**  
Clay Deco



**CST12D 8x48**  
Light Deco



**CST35D 8x48**  
Dark Deco



**CST44D 8x48**  
Clay Deco

## FIELD TILE FORMATS

12x24 &  
12x24 (deco)



8x48 (deco)



24x48



## MOSAICS




**CST10/M12REC**  
Levee White 32pc



**CST20/M12REC**  
Café Light Gray 32pc



**CST30/M12REC**  
French Gray 32pc



**CST40/M12REC**  
Spanish Clay 32pc




**CST50/M12REC**  
Black Bayou 32pc





above: **CST40 12x24** Spanish Clay & **CST44D 12x24** Clay Deco

## TRIMS



**P43N9 3x24**  
Bullnose

| PORCELAIN TECHNICAL DATA  |                          |  |                                |
|---------------------------|--------------------------|--|--------------------------------|
| Country of Origin         | USA                      | Breaking Strength                          | ≥ 450 lbf. avg.                |
| ANSI® A326.3 <sup>1</sup> | Interior, Wet Plus (IW+) | Water Absorption                           | ≤ 0.5% <sup>2</sup>            |
| Recycled Content          | 40%                      | Edge                                       | Rectified                      |
| Surface Hardness          | 7 Mohs                   | Intended Use <sup>3</sup>                  | Residential & Light Commercial |
| Thickness                 | 9mm                      | <sup>1</sup> See page 189 for more details |                                |
| Shade Variation           | V3 - Moderate Variation  | <sup>2</sup> Average production value      |                                |
|                           |                          | <sup>3</sup> See page 188 for more details |                                |

note: Product specifications are subject to change. See Technical Data section on page 186 for details.








**34310**  
Bleach



**34316**  
Char



**34327**  
Meld

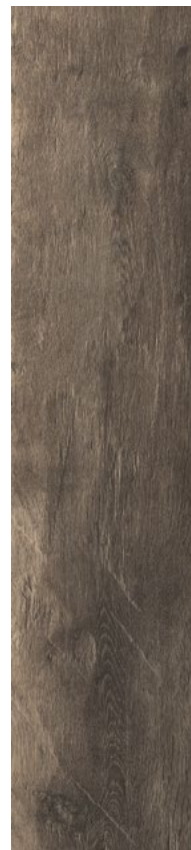

**34398**  
Tone

## FIELD TILE FORMATS

8x36



## MOSAICS



**34310/M2x12HER**  
Bleach Herringbone



**34316/M2x12HER**  
Char Herringbone



**34327/M2x12HER**  
Meld Herringbone



**34398/M2x12HER**  
Tone Herringbone

trims not available



above: **34310 8x36 Bleach**




**34310/M1x4STK**  
Bleach Stack



**34316/M1x4STK**  
Char Stack



**34327/M1x4STK**  
Meld Stack



**34398/M1x4STK**  
Tone Stack

## PORCELAIN TECHNICAL DATA

|                                 |                          |  |  |
|---------------------------------|--------------------------|--|--|
| <b>Country of Origin</b>        | USA                      | <b>Breaking Strength</b>                   | ≥ 460 lbf. avg.                                  |
| <b>ANSI® A326.3<sup>1</sup></b> | Interior, Wet Plus (IW+) | <b>Water Absorption</b>                    | ≤ 0.5% <sup>2</sup>                              |
| <b>Recycled Content</b>         | 40%                      | <b>Edge</b>                                | Pressed  |
| <b>Surface Hardness</b>         | 7 Mohs                   | <b>Intended Use<sup>3</sup></b>            | Residential, Light Commercial & Heavy Commercial |
| <b>Thickness</b>                | 9mm                      | <sup>1</sup> See page 189 for more details |  |
| <b>Shade Variation</b>          | V4 - Random Variation    | <sup>2</sup> Average production value      |  |
|                                 |                          | <sup>3</sup> See page 188 for more details |  |

notes: Product specifications are subject to change. See Technical Data section on page 186 for details.

Each M2x12HER Herringbone Mosaic is two parts, side A and side B. This item is sold (6) pieces per carton, in sets of (3) A's and (3) B's. The total coverage per carton is 5.7 SQFT.





**29914**  
Delta Haze



**29936**  
Coastal Sand

FIELD TILE FORMATS



MOSAICS



**29914/M12**  
Delta Haze 25pc



**29936/M12**  
Coastal Sand 25pc

TRIMS



**P43C9 3x12**  
Bullnose

**P36C9 6x12**  
Cove Base

**PB3169 6x1**  
Cove Base Corner

**CR2x12 2x12**  
Chair Rail

**CRS2x1 2x1**  
Chair Rail Stop





above: **29914 12x12 & 12x24 Delta Haze**


| PORCELAIN TECHNICAL DATA  |                            |  |  |
|---------------------------|----------------------------|--|--|
| Country of Origin         | USA                        | Breaking Strength                          | ≥ 365 lbf. avg.                                  |
| ANSI® A326.3 <sup>1</sup> | Interior, Wet Plus (IW+)   | Water Absorption                           | ≤ 0.5% <sup>2</sup>                              |
| Recycled Content          | 40%                        | Edge                                       | Pressed  |
| Surface Hardness          | 7 Mohs                     | Intended Use <sup>3</sup>                  | Residential, Light Commercial & Heavy Commercial |
| Thickness                 | 8mm (12x12)<br>9mm (12x24) | <sup>1</sup> See page 189 for more details |  |
| Shade Variation           | V2 - Slight Variation      | <sup>2</sup> Average production value      |  |
|                           |                            | <sup>3</sup> See page 188 for more details |  |

note: Product specifications are subject to change. See Technical Data section on page 186 for details.





**DIV10**  
Dawn



**DIV20**  
Horizon



**DIV30**  
Mist




**DIV40**  
Dusk

## FIELD TILE FORMATS



12x24


## MOSAICS




**DIV10/M12**  
Dawn 25pc



**DIV20/M12**  
Horizon 25pc




**DIV30/M12**  
Mist 25pc




**DIV40/M12**  
Dusk 25pc



**DIV55/M4x4HEX**  
Hexagon Mix  
(Dawn, Horizon, Mist & Dusk)



**DIV10/RSP12x24**  
Dawn Random Stack



**DIV20/RSP12x24**  
Horizon Random Stack



**DIV30/RSP12x24**  
Mist Random Stack



**DIV40/RSP12x24**  
Dusk Random Stack

## TRIMS



**P43N9 3x24**  
Bullnose




above: **DIV30 12x24 Mist** & **DIV55/M4x4HEX Hexagon Mix Mosaic**

| PORCELAIN TECHNICAL DATA  |                          |  |  |
|---------------------------|--------------------------|--|--|
| Country of Origin         | USA                      | Breaking Strength                          | ≥ 456 lbf. avg.                                  |
| ANSI® A326.3 <sup>1</sup> | Interior, Wet Plus (IW+) | Water Absorption                           | ≤ 0.5% <sup>2</sup>                              |
| Recycled Content          | 40%                      | Edge                                       | Rectified  |
| Surface Hardness          | 7 Mohs                   | Intended Use <sup>3</sup>                  | Residential, Light Commercial & Heavy Commercial |
| Thickness                 | 9mm                      | <sup>1</sup> See page 189 for more details |  |
| Shade Variation           | V3 - Moderate Variation  | <sup>2</sup> Average production value      |  |
|                           |                          | <sup>3</sup> See page 188 for more details |  |


note: Product specifications are subject to change. See Technical Data section on page 186 for details.








**EVG10**  
Avenue A Gray



**EVG20**  
E. Houston Warm Gray




**EVG40**  
Stuyvesant Charcoal



**EVG50**  
Tompkins Blue/Black

## FIELD TILE FORMATS

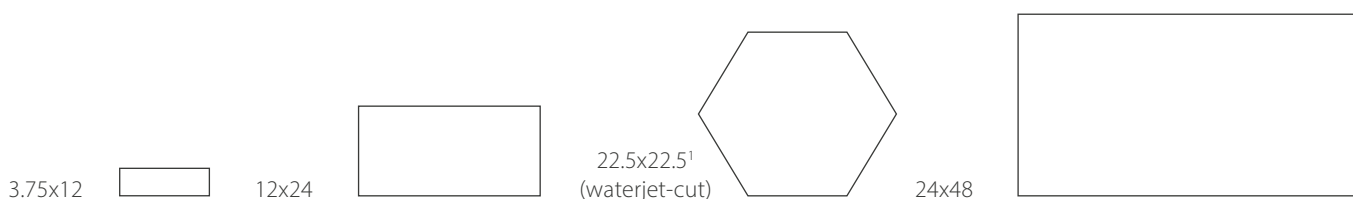


## MOSAICS



**EVG10/M122**  
Avenue A Gray 36pc



**EVG20/M122**  
E. Houston Warm Gray 36pc



**EVG40/M122**  
Stuyvesant Charcoal 36pc



**EVG50/M122**  
Tompkins Blue/Black 36pc



**EVG145M7x7HEX<sup>1,2</sup>**  
Cool Mix  
(Avenue A Gray, Stuyvesant  
Charcoal & Tompkins Blue/Black)



**EVG123M7x7HEX<sup>1,2</sup>**  
Warm Mix  
(Avenue A Gray, E. Houston Warm  
Gray & Potter's Red Clay)

<sup>1</sup>For specific dimensions and coverage, refer to the Technical Data Sheet on:  
<https://www.floridatile.com/products/east-village/>.

<sup>2</sup>Each hexagon mix mosaic comes in patterns A, B, and C to add variation.

## TRIMS



**P43N9 3x24**  
Bullnose




above: **EVG20 3.75x12 E. Houston Warm Gray** (other format: color reference only)

| PORCELAIN TECHNICAL DATA  |   |  |  |
|---------------------------|---|--|--|
| Country of Origin         | USA   | Breaking Strength                          | ≥ 410 lbf. avg.                                  |
| ANSI® A326.3 <sup>1</sup> | Interior, Wet (IW)<br><b>Mosaics</b> Interior, Wet Plus (IW+) | Water Absorption                           | ≤ 0.5% <sup>2</sup>                              |
| Recycled Content          | 40%   | Edge                                       | Rectified  |
| Surface Hardness          | 7 Mohs  | Intended Use <sup>3</sup>                  | Residential, Light Commercial & Heavy Commercial |
| Thickness                 | 9mm   | <sup>1</sup> See page 189 for more details |  |
| Shade Variation           | V2 - Slight Variation   | <sup>2</sup> Average production value      |  |
|                           |   | <sup>3</sup> See page 188 for more details |  |

note: Product specifications are subject to change. See Technical Data section on page 186 for details.





**ENC10** Matte  
**ENC1P** Polished  
Honesty



**ENC20** Matte  
**ENC2P** Polished  
Grace



**ENC30** Matte  
**ENC3P** Polished  
Beauty



**ENC40** Matte  
**ENC4P** Polished  
Charm


## FIELD TILE FORMATS



## MOSAICS & LISTELLOS




**ENC10/M122**  
Honesty 36pc



**ENC20/M122**  
Grace 36pc



**ENC30/M122**  
Beauty 36pc



**ENC40/M122**  
Charm 36pc



**ENC10/M3x3HEX**  
**ENC1P/M3x3HEX**

Honesty Hexagon



**ENC20/M3x3HEX**  
**ENC2P/M3x3HEX**  
Grace Hexagon



**ENC30/M3x3HEX**  
**ENC3P/M3x3HEX**  
Beauty Hexagon



**ENC40/M3x3HEX**  
**ENC4P/M3x3HEX**  
Charm Hexagon



**ENC1G/L2.4x12** (glossy ceramic)  
Honesty Ingot



**ENC2G/L2.4x12** (glossy ceramic)  
Grace Ingot



**ENC3G/L2.4x12** (glossy ceramic)  
Beauty Ingot




**ENC4G/L2.4x12** (glossy ceramic)  
Charm Ingot






above: **ENC4P** Charm (color reference only)

## TRIMS



**P43C9 3x12**

Bullnose (matte & polished)



**CR2x12 2x12**

Chair Rail (glossy ceramic)



**CRS2x1 2x1**

Chair Rail Stop (glossy ceramic)

## PORCELAIN TECHNICAL DATA

|                                 |   |  |   |
|---------------------------------|---|--|---|
| <b>Country of Origin</b>        | USA   | <b>Breaking Strength</b>                   | <b>Matte</b> ≥ 396 lbf. avg.<br><b>Polished</b> ≥ 600 lbf. avg. |
| <b>ANSI® A326.3<sup>1</sup></b> | <b>Matte</b> Interior, Wet Plus (IW+)<br><b>Polished</b> Interior, Dry (ID) | <b>Water Absorption</b>                    | ≤ 0.5% <sup>2</sup>   |
| <b>Recycled Content</b>         | 40%   | <b>Edge</b>                                | Rectified   |
| <b>Surface Hardness</b>         | <b>Matte</b> 7 Mohs<br><b>Polished</b> 6 Mohs                               | <b>Intended Use<sup>3</sup></b>            | Residential & Light Commercial                                  |
| <b>Thickness</b>                | 9mm   | <sup>1</sup> See page 189 for more details |   |
| <b>Shade Variation</b>          | V3 - Moderate Variation   | <sup>2</sup> Average production value      |   |
|                                 |   | <sup>3</sup> See page 188 for more details |   |

note: Product specifications are subject to change. See Technical Data section on page 186 for details.





**GVT10**  
White



**GVT20**  
Beige



**GVT30**  
Gray



**GVT40**  
Natural

## FIELD TILE FORMATS

12x24



## MOSAICS




**GVT10/M12**  
White 25pc



**GVT20/M12**  
Beige 25pc



**GVT30/M12**  
Gray 25pc



**GVT40/M12**  
Natural 25pc



**GVT10/M1x6BRICK**  
White Offset Brick



**GVT20/M1x6BRICK**  
Beige Offset Brick



**GVT30/M1x6BRICK**  
Gray Offset Brick



**GVT40/M1x6BRICK**  
Natural Offset Brick

## TRIMS



**P43N9 3x24**  
Bullnose



above: **GVT20 12x24** Beige & **Emotive EMV6S 3x12** Gratitude Dark Grey Silk

| PORCELAIN TECHNICAL DATA  |                          |  |                                |
|---------------------------|--------------------------|--|--------------------------------|
| Country of Origin         | USA                      | Breaking Strength                          | ≥ 450 lbf. avg.                |
| ANSI® A326.3 <sup>1</sup> | Interior, Wet Plus (IW+) | Water Absorption                           | ≤ 0.5% <sup>2</sup>            |
| Recycled Content          | 40%                      | Edge                                       | Pressed                        |
| Surface Hardness          | 7 Mohs                   | Intended Use <sup>3</sup>                  | Residential & Light Commercial |
| Thickness                 | 9mm                      | <sup>1</sup> See page 189 for more details |                                |
| Shade Variation           | V3 - Moderate Variation  | <sup>2</sup> Average production value      |                                |
|                           |                          | <sup>3</sup> See page 188 for more details |                                |

note: Product specifications are subject to change. See Technical Data section on page 186 for details.








**HRG10**  
**HRG10U** (2cm)  
Stardust White




**HRG20**  
**HRG20U** (2cm)  
Pinnacle Beige




**HRG30**  
**HRG30U** (2cm)  
Rockwall Gray



**HRG40**  
Deep Taupe




**HRG50**  
Nightfall Black



**HRG60**  
**HRG60U** (2cm)  
Canyon Slate

## FIELD TILE FORMATS

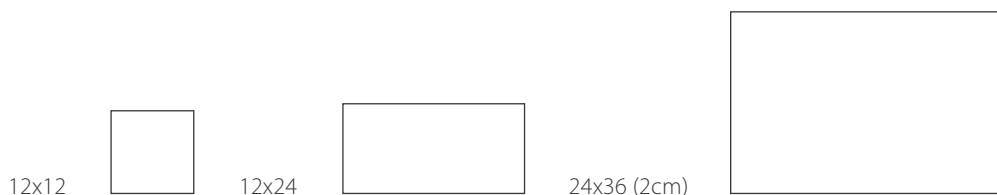


## MOSAICS




**HRG10/M12**  
Stardust White 25pc




**HRG20/M12**  
Pinnacle Beige 25pc




**HRG30/M12**  
Rockwall Gray 25pc



**HRG40/M12**  
Deep Taupe 25pc



**HRG50/M12**  
Nightfall Black 25pc




**HRG60/M12**  
Canyon Slate 25pc


## TRIMS




**P43C9 3x12**  
Bullnose



STEP TREAD  
**USTEPA**  
12x24\*



STEP TREAD  
WITH GROOVES &  
DRIP FLAP  
**USTEPD**  
12x24\*



STEP TREAD  
WITH BULLNOSE  
**USTEPB**  
12x24\*

\*Special Order Only



above: **HRG10 12x24** Stardust White

| PORCELAIN TECHNICAL DATA  |   |   |  |
|---------------------------|---|---|--|
| Country of Origin         | USA   | Breaking Strength   | ≥ 450 lbf. avg.<br><b>2cm</b> ≥ 2800 lbf. avg.   |
| ANSI® A326.3 <sup>1</sup> | Interior, Wet Plus (IW+)<br><b>2cm</b> Exterior, Wet (EW)       | Water Absorption  | ≤ 0.5% <sup>2</sup>                              |
| Recycled Content          | 40%   | Edge  | Pressed  |
| Surface Hardness          | 7 Mohs  | Intended Use <sup>3</sup>   | Residential, Light Commercial & Heavy Commercial |
| Thickness                 | <b>8mm</b> (12x12)<br><b>9mm</b> (12x24)<br><b>20mm</b> (24x36) | <sup>1</sup> See page 189 for more details<br><sup>2</sup> Average production value<br><sup>3</sup> See page 188 for more details |  |
| Shade Variation           | V3 - Moderate Variation   |   |  |


note: Product specifications are subject to change. See Technical Data section on page 186 for details.

**2cm Porcelain Pavers:** Please visit page 144 and the website [www.floridatile.com](http://www.floridatile.com) for more information.







**IND10**  
**IND10P** Polished  
Onyx



**IND20**  
**IND20P** Polished  
Statuario



**IND30**  
**IND30P** Polished  
Arabescato



**IND40**  
**IND40P** Polished  
Lilac




**IND50**  
**IND50P** Polished  
Breccia Capraia



**IND60P** Polished  
Sahara Noir


## FIELD TILE FORMATS

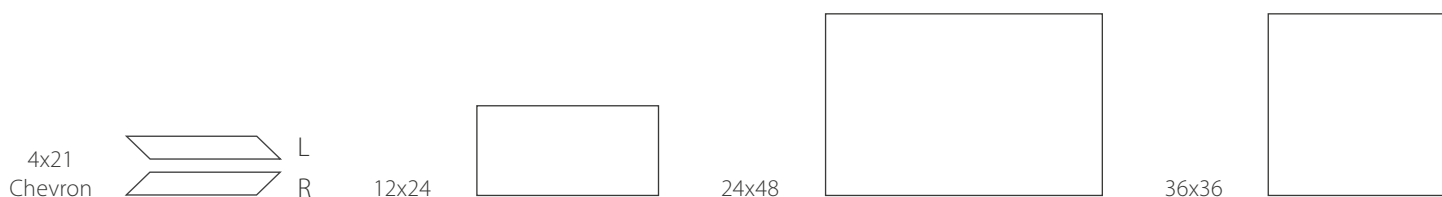


## MOSAICS




**IND10/M12**  
Onyx 25pc




**IND20/M12**  
Statuario 25pc



**IND30/M12**  
Arabescato 25pc



**IND40/M12**  
Lilac 25pc




**IND50/M12**  
Breccia Capraia 25pc



**IND10/M2.5CIR**  
**IND10P** Polished  
Onyx Circle Mosaic



**IND20/M2.5CIR**  
**IND20P** Polished  
Statuario Circle Mosaic



**IND30/M2.5CIR**  
**IND30P** Polished  
Arabescato  
Circle Mosaic



**IND40/M2.5CIR**  
**IND40P** Polished  
Lilac Circle Mosaic




**IND50/M2.5CIR**  
**IND50P** Polished  
Breccia Capraia  
Circle Mosaic




**IND60P/M2.5CIR**  
Polished  
Sahara Noir  
Circle Mosaic



**IND10P/M6x6MIX**  
Onyx Mixed Mosaic




**IND20P/M6x6MIX**  
Statuario  
Mixed Mosaic




**IND30P/M6x6MIX**  
Arabescato  
Mixed Mosaic



**IND40P/M6x6MIX**  
Lilac Mixed Mosaic



**IND50P/M6x6MIX**  
Breccia Capraia  
Mixed Mosaic



**IND60P/M6x6MIX**  
Sahara Noir  
Mixed Mosaic






above: **IND40P/M2.5CIR** Lilac Circle Mosaic (polished)



**IND26P/M6x6MIX**  
Statuario Mix  
Mixed Mosaic




**IND36P/M6x6MIX**  
Arabescato Mix  
Mixed Mosaic



**IND56P/M6x6MIX**  
Breccia Capraia  
Mixed Mosaic

## TRIMS



**P43N9 3x24**  
Bullnose (matte & polished)

| PORCELAIN TECHNICAL DATA  |   |  |                                |
|---------------------------|---|--|--------------------------------|
| Country of Origin         | USA   | Breaking Strength                          | ≥ 450 lbf. avg.                |
| ANSI® A326.3 <sup>1</sup> | <b>Matte</b> Interior, Wet Plus (IW+)<br><b>Polished</b> Interior, Dry (ID) | Water Absorption                           | ≤ 0.5% <sup>2</sup>            |
| Recycled Content          | 40%   | Edge                                       | Rectified                      |
| Surface Hardness          | 7 Mohs  | Intended Use <sup>3</sup>                  | Residential & Light Commercial |
| Thickness                 | 9mm   | <sup>1</sup> See page 189 for more details |                                |
| Shade Variation           | V3 - Moderate Variation   | <sup>2</sup> Average production value      |                                |
|                           |   | <sup>3</sup> See page 188 for more details |                                |

note: Product specifications are subject to change. See Technical Data section on page 186 for details.





**28315**  
Ash



**28338**  
Fir



**28327**  
Chestnut



**28325**  
Burl



**28395**  
Mahogany



**28378**  
Cherry

## FIELD TILE FORMATS

8x36







above: **28325 8x36 Burl**

| PORCELAIN TECHNICAL DATA  |                       |  |                                |
|---------------------------|-----------------------|--|--------------------------------|
| Country of Origin         | USA                   | Breaking Strength                          | ≥ 420 lbf. avg.                |
| ANSI® A326.3 <sup>1</sup> | Interior, Wet (IW)    | Water Absorption                           | ≤ 0.5% <sup>2</sup>            |
| Recycled Content          | 40%                   | Edge                                       | Pressed                        |
| Surface Hardness          | 7 Mohs                | Intended Use <sup>3</sup>                  | Residential & Light Commercial |
| Thickness                 | 9mm                   | <sup>1</sup> See page 189 for more details |                                |
| Shade Variation           | V2 - Slight Variation | <sup>2</sup> Average production value      |                                |
|                           |                       | <sup>3</sup> See page 188 for more details |                                |

note: Product specifications are subject to change. See Technical Data section on page 186 for details.








|                                  |                                |                                  |                            |                                |                              |                                   |
|----------------------------------|--------------------------------|----------------------------------|----------------------------|--------------------------------|------------------------------|-----------------------------------|
| <b>28004</b><br>Wilmington White | <b>28034</b><br>Hampton Blonde | <b>28092</b><br>Charleston Brown | <b>28088</b><br>Cayman Red | <b>28013</b><br>Nantucket Gray | <b>28060</b><br>Newport Blue | <b>28017</b><br>Cape Cod Charcoal |
|----------------------------------|--------------------------------|----------------------------------|----------------------------|--------------------------------|------------------------------|-----------------------------------|

## FIELD TILE FORMATS

6x24 

## TRIMS



**P43N9 3x24**  
Bullnose



above: **28088 6x24** Cayman Red

| PORCELAIN TECHNICAL DATA  |                       |  |  |
|---------------------------|-----------------------|--|--|
| Country of Origin         | USA                   | Breaking Strength                          | ≥ 493 lbf. avg.                                  |
| ANSI® A326.3 <sup>1</sup> | Interior, Wet (IW)    | Water Absorption                           | ≤ 0.5% <sup>2</sup>                              |
| Recycled Content          | 40%                   | Edge                                       | Pressed  |
| Surface Hardness          | 7 Mohs                | Intended Use <sup>3</sup>                  | Residential, Light Commercial & Heavy Commercial |
| Thickness                 | 9mm                   | <sup>1</sup> See page 189 for more details |  |
| Shade Variation           | V2 - Slight Variation | <sup>2</sup> Average production value      |  |
|                           |                       | <sup>3</sup> See page 188 for more details |  |


note: Product specifications are subject to change. See Technical Data section on page 186 for details.




# NY2LA

COLOR BODY PORCELAIN & 2CM PAVERS

## CONCRETE




**NY210**  
**NY210U** (2cm)  
Malibu White




**NY220**  
**NY220U** (2cm)  
Brentwood Beige



**NY250**  
Tribeca Taupe



**NY230**  
**NY230U** (2cm)  
Riverside Steel




**NY260**  
Gramercy Gray




**NY240**  
Chelsea Black

## FIELD TILE FORMATS

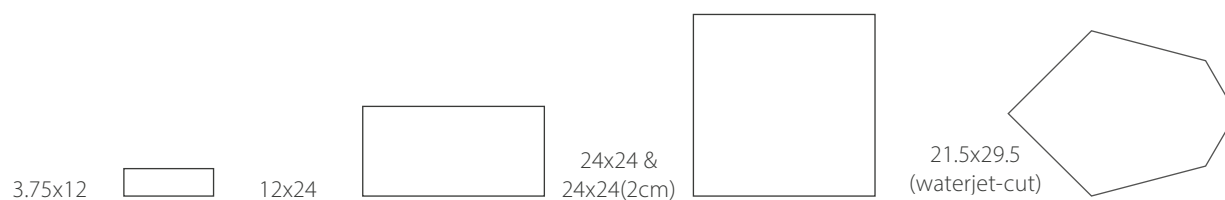

## MOSAICS



**NY210/M122**  
Malibu White 36pc



**NY220/M122**  
Brentwood Beige 36pc




**NY250/M122**  
Tribeca Taupe 36pc



**NY230/M122**  
Riverside Steel 36pc



**NY260/M122**  
Gramercy Gray 36pc



**NY240/M122**  
Chelsea Black 36pc



**NY275/M12POLY**  
Warm Mix Polygon  
(Malibu White, Brentwood Beige & Tribeca Taupe)




**NY285/M12POLY**  
Cool Mix Polygon  
(Riverside Steel, Gramercy Gray & Chelsea Black)





above: **NY240 21.5x29.5POLY** Chelsea Black (waterjet-cut)

## TRIMS

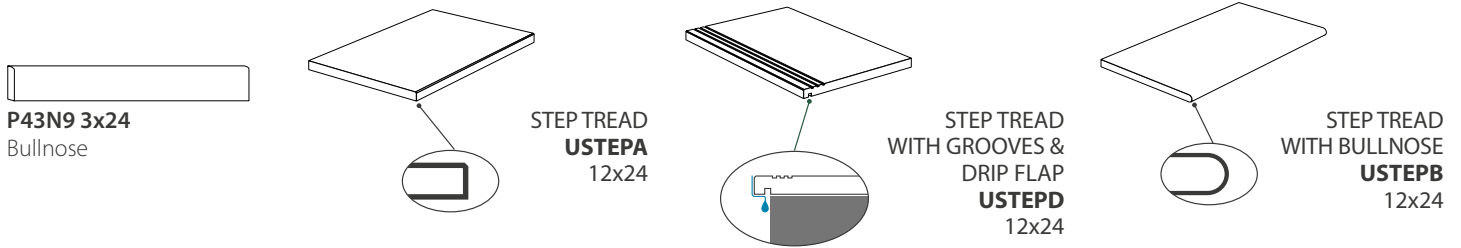

| PORCELAIN TECHNICAL DATA  |  |   |   |
|---------------------------|--|---|---|
| Country of Origin         | USA  | Breaking Strength   | ≥ 450 lbf. avg.<br>2cm ≥ 2800 lbf. avg.   |
| ANSI® A326.3 <sup>1</sup> | Interior, Wet Plus (IW+)<br>2cm Exterior, Wet (EW) | Water Absorption  | ≤ 0.5% <sup>2</sup>   |
| Recycled Content          | 40%  | Edge  | <b>Waterjet-cut</b> (21.5x29.5)<br><b>Rectified</b> (all other formats)<br><b>Pressed</b> (2cm) |
| Surface Hardness          | 7 Mohs   | Intended Use <sup>3</sup>   | Residential, Light Commercial & Heavy Commercial  |
| Thickness                 | 9mm<br>20mm (2cm)                                  | <sup>1</sup> See page 189 for more details<br><sup>2</sup> Average production value<br><sup>3</sup> See page 188 for more details |   |
| Shade Variation           | V2 - Slight Variation                              |   |   |

note: Product specifications are subject to change. See Technical Data section on page 186 for details.

**2cm Porcelain Pavers:** Please visit page 142 and the website [www.floridatile.com](http://www.floridatile.com) for more information.



# PASSENGER

COLOR BODY PORCELAIN & 2CM PAVERS

STONE



**PSG10**  
**PSG10U** (2cm)  
Wander White



**PSG30**  
**PSG30U** (2cm)  
Everywhere Greige




**PSG20**  
**PSG20U** (2cm)  
Anywhere Beige




**PSG40**  
**PSG40U** (2cm)  
Leisure Gray

## FIELD TILE FORMATS

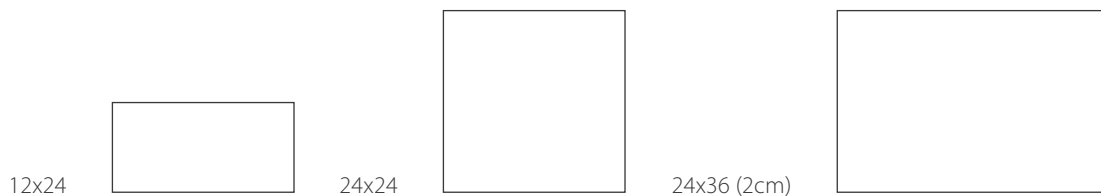

## MOSAICS




**PSG10/M12**  
Wander White 25pc



**PSG30/M12**  
Everywhere Greige 25pc



**PSG20/M12**  
Anywhere Beige 25pc



**PSG40/M12**  
Leisure Gray 25pc



**PSG10/RSP12x24**  
Wander White Random Stack



**PSG30/RSP12x24**  
Everywhere Greige Random Stack



**PSG20/RSP12x24**  
Anywhere Beige Random Stack




**PSG40/RSP12x24**  
Leisure Gray Random Stack



above: **PSG20/RSP12x24** Anywhere Beige Random Stack Mosaic

## TRIMS

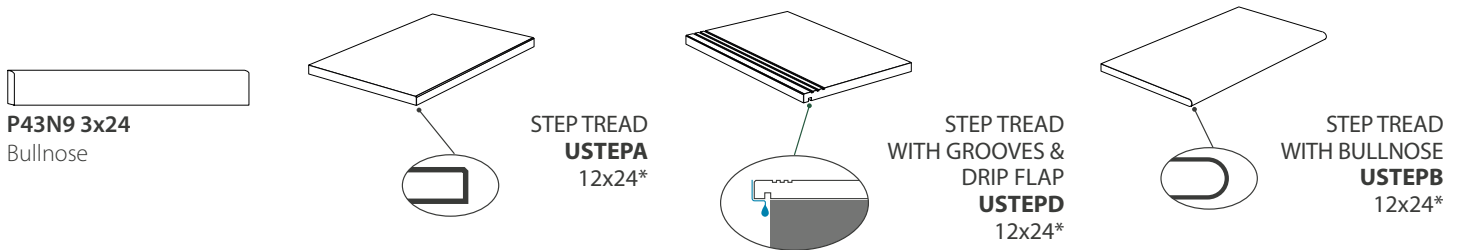

\*Special Order Only

### PORCELAIN TECHNICAL DATA

|                           |  |   |  |
|---------------------------|--|---|--|
| Country of Origin         | USA  | Breaking Strength   | ≥ 450 lbf. avg.<br>2cm ≥ 2800 lbf. avg.          |
| ANSI® A326.3 <sup>1</sup> | Interior, Wet Plus (IW+)<br>2cm Exterior, Wet (EW) | Water Absorption  | ≤ 0.5% <sup>2</sup>                              |
| Recycled Content          | 40%  | Edge  | Rectified  |
| Surface Hardness          | 7 Mohs   | Intended Use <sup>3</sup>   | Residential, Light Commercial & Heavy Commercial |
| Thickness                 | 9mm<br>20mm (2cm)                                  | <sup>1</sup> See page 189 for more details<br><sup>2</sup> Average production value<br><sup>3</sup> See page 188 for more details |  |
| Shade Variation           | V3 - Moderate Variation                            |   |  |

note: Product specifications are subject to change. See Technical Data section on page 186 for details.

**2cm Porcelain Pavers:** Please visit page 144 and the website [www.floridatile.com](http://www.floridatile.com) for more information.







# PRECIOUS

GLAZED PORCELAIN & CERAMIC WALL TILE


MARBLE



**35001 12x24**  
**35001 24x24**  
**35001 24x48**  
Calacatta



**B639.0113.0951 5x14**  
**B629.0128.0951 14x27**  
**B635.0078.0951 14x39**  
**(35001)**  
Calacatta  
(ceramic wall)

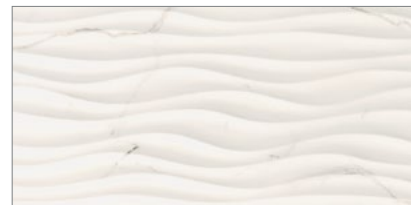

**B629.0131.0011**  
**(35001D) 14x27**  
Calacatta Curl Deco  
(ceramic wall)

## FIELD TILE FORMATS

12x24



24x48



5x14  
(ceramic wall)  
(glossy)



14x27  
(ceramic wall)  
(glossy)



14x39  
(ceramic wall)  
(glossy)



## MOSAICS



**35001/M1x4HER**  
Calacatta Herringbone  
(matte only)



**B663.0092.0011**  
**(35001)/M12HEX**  
Calacatta Hexagon  
(ceramic wall)  
(matte & glossy mix)

## TRIMS



**P43C9 3x12**  
Bullnose



**S43E9 3x14**  
Bullnose  
(ceramic wall)



**SN4339 3x3**  
Outside Corner  
(ceramic wall)



**B750.0011.0011 (35001)**  
**CR1.7x14**  
Calacatta Chair Rail



**B758.0031.0011 (35001)**  
**CRS1.7x1**  
Chair Rail Stop



above: **35001 12x24** Calacatta & **635.0078.0951 (35001) 14x39** Calacatta (ceramic wall)

## PORCELAIN TECHNICAL DATA

|                                       |  |  |   |
|---------------------------------------|--|--|---|
| <b>Country of Origin</b> <sup>1</sup> | USA  | <b>Breaking Strength</b>   | ≥ 440 lbf. avg.   |
| <b>ANSI® A326.3</b> <sup>2</sup>      | Interior, Wet Plus (IW+)   | <b>Water Absorption</b>  | ≤ 0.5% <sup>3</sup>                                       |
| <b>Recycled Content</b>               | 40%  | <b>Edge</b>  | <b>Cut</b> (5x14)<br><b>Rectified</b> (all other formats) |
| <b>Surface Hardness</b>               | 7 Mohs   | <b>Intended Use</b> <sup>4</sup>   | Residential & Light Commercial                            |
| <b>Thickness</b>                      | <b>9mm</b> (12x24 & 24x48)<br><b>8mm</b> (5x14, 14x27, 14x27D & 14x39) | <sup>1</sup> Origin refers to porcelain field tile only. Country of origin is subject to change due to manufacturing efficiencies and other factors. See retailer or product packaging to verify country of origin.<br><sup>2</sup> See page 189 for more details<br><sup>3</sup> Average production value<br><sup>4</sup> See page 188 for more details |   |
| <b>Shade Variation</b>                | V2 - Slight Variation  |  |   |

notes: Product specifications are subject to change. See Technical Data section on page 186 for details.

Ceramic wall tile country of origin is Portugal.




\*porcelain only





**28503**  
Ivory Staccato



**28513**  
Silver Melody



**28522**  
Almond Note



**28532**  
Desert Harmony



**28593**  
Stone Chamber

## FIELD TILE FORMATS


3.75x12




12x24




## MOSAICS




**28503/M1x6**  
Ivory Staccato Bar




**28513/M1x6**  
Silver Melody Bar




**28522/M1x6**  
Almond Note Bar



**28532/M1x6**  
Desert Harmony Bar



**28593/M1x6**  
Stone Chamber Bar



**28500A/M12ROMAN**  
Soprano Roman  
(Ivory Staccato, Almond Note &  
Silver Melody)



**28500B/M12ROMAN**  
Alto Roman  
(Silver Melody, Almond Note &  
Ivory Staccato)



**28500C/M12ROMAN**  
Tenor Roman  
(Stone Chamber, Desert Harmony &  
Almond Note)

## TRIMS



**P43C9 3x12**  
Bullnose





above: **28522 12x24** Almond Note & **28522/M1x6** Almond Note Bar Mosaic

| PORCELAIN TECHNICAL DATA  |                          |  |  |
|---------------------------|--------------------------|--|--|
| Country of Origin         | USA                      | Breaking Strength                          | ≥ 465 lbf. avg.                                      |
| ANSI® A326.3 <sup>1</sup> | Interior, Wet Plus (IW+) | Water Absorption                           | ≤ 0.5% <sup>2</sup>                                  |
| Recycled Content          | 40%                      | Edge                                       | <b>Rectified</b> (3.75x12)<br><b>Pressed</b> (12x24) |
| Surface Hardness          | 7 Mohs                   | Intended Use <sup>3</sup>                  | Residential, Light Commercial & Heavy Commercial     |
| Thickness                 | 9mm                      | <sup>1</sup> See page 189 for more details |  |
| Shade Variation           | V1 - Uniform Appearance  | <sup>2</sup> Average production value      |  |
|                           |                          | <sup>3</sup> See page 188 for more details |  |

note: Product specifications are subject to change. See Technical Data section on page 186 for details.





**34901**  
Breeze



**34938**  
Drift



**34915**  
Current



**34905**  
Vortex  
(not available in 24x48)

## FIELD TILE FORMATS



## MOSAICS



**34901/M1x3HER**  
Breeze Herringbone



**34938/M1x3HER**  
Drift Herringbone



**34915/M1x3HER**  
Current Herringbone



**34905/M1x3HER**  
Vortex Herringbone




**34901/M4x4HEX**  
Breeze Hexagon



**34938/M4x4HEX**  
Drift Hexagon



**34915/M4x4HEX**  
Current Hexagon



**34905/M4x4HEX**  
Vortex Hexagon

## TRIMS



**P43N9 3x24**  
Bullnose




above: 34901 12x24 Breeze

| PORCELAIN TECHNICAL DATA  |                          |  |  |
|---------------------------|--------------------------|--|--|
| Country of Origin         | USA                      | Breaking Strength                          | ≥ 490 lbf. avg.                                  |
| ANSI® A326.3 <sup>1</sup> | Interior, Wet Plus (IW+) | Water Absorption                           | ≤ 0.5% <sup>2</sup>                              |
| Recycled Content          | 40%                      | Edge                                       | Rectified  |
| Surface Hardness          | 7 Mohs                   | Intended Use <sup>3</sup>                  | Residential, Light Commercial & Heavy Commercial |
| Thickness                 | 9mm                      | <sup>1</sup> See page 189 for more details |  |
| Shade Variation           | V2 - Slight Variation    | <sup>2</sup> Average production value      |  |
|                           |                          | <sup>3</sup> See page 188 for more details |  |

note: Product specifications are subject to change. See Technical Data section on page 186 for details.







**SDP10**  
Fortune White



**SDP20**  
Spontaneous Beige



**SDP30**  
Infinite Cool Gray



**SDP40**  
Fate Warm Gray



**SDP60**  
Intuition Tobacco




**SDP70**  
Destiny Black

## FIELD TILE FORMATS



12x24


## MOSAICS




**SDP10/M122**  
Fortune White 36pc




**SDP20/M122**  
Spontaneous Beige 36pc




**SDP30/M122**  
Infinite Cool Gray 36pc




**SDP40/M122**  
Fate Warm Gray 36pc




**SDP60/M122**  
Intuition Tobacco 36pc



**SDP70/M122**  
Destiny Black 36pc



**SDP126/M2x4TRI**  
Warm Mix  
(Fortune White, Spontaneous Beige &  
Intuition Tobacco)




**SDP347/M2x4TRI**  
Cool Mix  
(Infinite Cool Gray, Fate Warm Gray &  
Destiny Black)

## TRIMS



**P43N9 3x24**  
Bullnose



**P36C9 6x12**  
Cove Base



**PB3169 6x1**  
Cove Base Corner




above: **SDP60 12x24** Intuition Tobacco & **SDP126/M2x4TRI** Warm Mix Mosaic


| PORCELAIN TECHNICAL DATA  |                          |  |  |
|---------------------------|--------------------------|--|--|
| Country of Origin         | USA                      | Breaking Strength                          | ≥ 450 lbf. avg.                                  |
| ANSI® A326.3 <sup>1</sup> | Interior, Wet Plus (IW+) | Water Absorption                           | ≤ 0.5% <sup>2</sup>                              |
| Recycled Content          | 40%                      | Edge                                       | Rectified  |
| Surface Hardness          | 7 Mohs                   | Intended Use <sup>3</sup>                  | Residential, Light Commercial & Heavy Commercial |
| Thickness                 | 9mm                      | <sup>1</sup> See page 189 for more details |  |
| Shade Variation           | V2 - Slight Variation    | <sup>2</sup> Average production value      |  |
|                           |                          | <sup>3</sup> See page 188 for more details |  |

note: Product specifications are subject to change. See Technical Data section on page 186 for details.





**TUV10**  
Arezzo Ivory



**TUV20**  
Cortona Beige




**TUV30**  
Florence Silver


## FIELD TILE FORMATS




## MOSAICS



**TUV10/M122**  
Arezzo Ivory 36pc



**TUV20/M122**  
Cortona Beige 36pc



**TUV30/M122**  
Florence Silver 36pc

## TRIMS



**P43C9 3x12**  
Bullnose






above: **TUV20 12x24** Cortona Beige

| PORCELAIN TECHNICAL DATA  |   |   |  |
|---------------------------|---|---|--|
| Country of Origin         | USA   | Breaking Strength   | ≥ 253 lbf. avg. (12x12)<br>≥ 355 lbf. avg. (12x24) |
| ANSI® A326.3 <sup>1</sup> | Interior, Wet (IW)<br><b>Mosaics</b> Interior, Wet Plus (IW+) | Water Absorption  | ≤ 0.5% <sup>2</sup>                                |
| Recycled Content          | 40%   | Edge  | Pressed  |
| Surface Hardness          | 7 Mohs  | Intended Use <sup>3</sup>   | Residential, Light Commercial & Heavy Commercial   |
| Thickness                 | 8mm (12x12)<br>9mm (12x24)                                    | <sup>1</sup> See page 189 for more details<br><sup>2</sup> Average production value<br><sup>3</sup> See page 188 for more details |  |
| Shade Variation           | V3 - Moderate Variation                                       |   |  |

notes: Product specifications are subject to change. See Technical Data section on page 186 for details.







**FDY10**  
Alumina



**FDY20**  
Cast Nickel



**FDY30**  
Graphite




**FDY40**  
Iron Oxide

## FIELD TILE FORMATS



12x24

## MOSAICS




**FDY10/M12**  
Alumina 25pc



**FDY20/M12**  
Cast Nickel 25pc



**FDY30/M12**  
Graphite 25pc



**FDY40/M12**  
Iron Oxide 25pc

## TRIMS



**P43N9 3x24**  
Bullnose



above: **FDY10 12x24 Alumina** & **FDY30 12x24 Graphite**

| PORCELAIN TECHNICAL DATA  |   |  |  |
|---------------------------|---|--|--|
| Country of Origin         | USA   | Breaking Strength                          | ≥ 400 lbf. avg.                                  |
| ANSI® A326.3 <sup>1</sup> | Interior, Wet (IW)<br><b>Mosaics</b> Interior, Wet Plus (IW+) | Water Absorption                           | ≤ 0.5% <sup>2</sup>                              |
| Recycled Content          | 40%   | Edge                                       | Pressed  |
| Surface Hardness          | 7 Mohs  | Intended Use <sup>3</sup>                  | Residential, Light Commercial & Heavy Commercial |
| Thickness                 | 9mm   | <sup>1</sup> See page 189 for more details |  |
| Shade Variation           | V3 - Moderate Variation                                       | <sup>2</sup> Average production value      |  |
|                           |   | <sup>3</sup> See page 188 for more details |  |

note: Product specifications are subject to change. See Technical Data section on page 186 for details.







**89132**  
Sand




**89123**  
Clay



**89103**  
Quarry

## FIELD TILE FORMATS



## MOSAICS



**89132/M12**  
Sand 25pc




**89123/M12**  
Clay 25pc



**89103/M12**  
Quarry 25pc

## TRIMS



**P43C9 3x12**  
Bullnose



above: **89103 12x24 Quarry**

| PORCELAIN TECHNICAL DATA  |                            |   |                                |
|---------------------------|----------------------------|---|--------------------------------|
| Country of Origin         | USA                        | Breaking Strength   | ≥ 260 lbf. avg.                |
| ANSI® A326.3 <sup>1</sup> | Interior, Wet Plus (IW+)   | Water Absorption  | ≤ 0.5% <sup>2</sup>            |
| Recycled Content          | 40%                        | Edge  | Pressed                        |
| Surface Hardness          | 7 Mohs                     | Intended Use <sup>3</sup>   | Residential & Light Commercial |
| Thickness                 | 8mm (12x12)<br>9mm (12x24) | <sup>1</sup> See page 189 for more details<br><sup>2</sup> Average production value<br><sup>3</sup> See page 188 for more details |                                |
| Shade Variation           | V2 - Slight Variation      |   |                                |

note: Product specifications are subject to change. See Technical Data section on page 186 for details.





# **SURFACE THE OUTDOORS**

## 2CM PORCELAIN PAVERS





# 2CM PORCELAIN PAVERS

**2cm Porcelain Pavers from Florida Tile** are an impressive combination of elegance and engineering. The on-trend visuals, ease of installation, and unsurpassed durability make porcelain pavers the perfect solution for easy elegance in outdoor environments.

**Easy to install!** Because of their density and size, porcelain pavers can be dry installed. This means that when the substrate allows, installers can forego the adhesives or mortar/cement bases. It can be dry installed on grass or gravel and a variety of other surfaces. These installation methods offer the additional advantage of removing and reusing the pavers. Of course, these pavers can be installed with traditional setting materials if the substrate requires it. Nonporous porcelain pavers are ideal for any landscape.

**The technical benefits of porcelain are unbeatable!** These structural paving slabs can stand up to extreme residential and commercial environments. 2cm porcelain pavers will outperform virtually any other surface option. They can tolerate both subzero temperatures and tropical climates without cracking or weakening. The porcelain manufacturing process creates a product that is virtually non-porous and incredibly dense. They are strong enough to survive under the weight of a commercial fleet and practically maintenance free. No sealants are required.

**Aesthetically superior!** On track with architectural and hardscape design trends, these collections are inspired by both natural materials and urban elements. Designed and manufactured with HDP-High Definition Porcelain® digital printing, they feature looks that are virtually indistinguishable from stone or wood and mimic cement and concrete perfectly. Rich graphics with stunning detail and warm colors make 2cm porcelain pavers the ideal combination of performance, appearance, and versatility.



IN & OUT



COLOR-FAST



FROST RESISTANT



TRANSITABLE WHEN  
APPLIED TO A SCREED  
WITH ADHESIVE



EXCEPTIONAL  
THERMAL SHOCK  
RESISTANCE



FLAME RETARDANT



EASY TO CLEAN



SALT, STAIN & CHEMICAL  
RESISTANT



EASY TO INSTALL,  
REMOVE, REUSE &  
ECO-FRIENDLY



HIGHLY RESISTANT  
TO EXCESSIVE LOAD  
FORCE




**HRG10U**  
Stardust White



**HRG20U**  
Pinnacle Beige




**HRG30U**  
Rockwall Gray

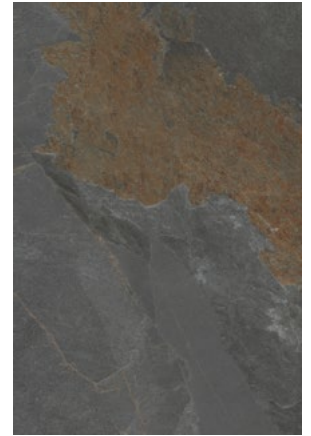


**HRG60U**  
Canyon Slate


## FIELD TILE FORMATS

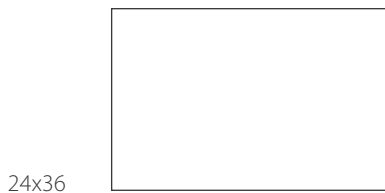


## TRIMS



STEP TREAD  
**USTEPA**  
12x24\*



STEP TREAD  
WITH GROOVES &  
DRIP FLAP  
**USTEPD**  
12x24\*



STEP TREAD  
WITH BULLNOSE  
**USTEPB**  
12x24\*

\*Special Order Only



above: **HRG20U 24x36** Pinnacle Beige

| PORCELAIN TECHNICAL DATA  |                         |  |  |
|---------------------------|-------------------------|--|--|
| Country of Origin         | USA                     | Breaking Strength                          | ≥ 2800 lbf. avg.                                 |
| ANSI® A326.3 <sup>1</sup> | Exterior, Wet (EW)      | Water Absorption                           | ≤ 0.5% <sup>2</sup>                              |
| Recycled Content          | 40%                     | Edge                                       | Pressed  |
| Surface Hardness          | 7 Mohs                  | Intended Use <sup>3</sup>                  | Residential, Light Commercial & Heavy Commercial |
| Thickness                 | 20mm                    | <sup>1</sup> See page 189 for more details |  |
| Shade Variation           | V3 - Moderate Variation | <sup>2</sup> Average production value      |  |
|                           |                         | <sup>3</sup> See page 188 for more details |  |

note: Product specifications are subject to change. See Technical Data section on page 186 for details.







**MIN10U**  
Alabaster



**MIN20U**  
Quartz




**MIN30U**  
Feldspar

## FIELD TILE FORMATS




24x24


## TRIMS



STEP TREAD  
**USTEPA**  
12x24



STEP TREAD  
WITH GROOVES &  
DRIP FLAP  
**USTEPD**  
12x24



STEP TREAD  
WITH BULLNOSE  
**USTEPB**  
12x24



above: **MIN20U 24x24 Quartz** & **USTEPD Quartz** Steap Tread with Grooves & Drip Flap

| PORCELAIN TECHNICAL DATA  |  |   |  |
|---------------------------|--|---|--|
| Country of Origin         | USA                                      | Breaking Strength   | ≥ 2800 lbf. avg.                                 |
| ANSI® A326.3 <sup>1</sup> | Exterior, Wet (EW)                       | Water Absorption  | ≤ 0.5% <sup>2</sup>                              |
| Recycled Content          | 40%                                      | Edge  | Pressed  |
| Surface Hardness          | 7 Mohs                                   | Intended Use <sup>3</sup>   | Residential, Light Commercial & Heavy Commercial |
| Thickness                 | 20mm                                     | <sup>1</sup> See page 189 for more details<br><sup>2</sup> Average production value<br><sup>3</sup> See page 188 for more details |  |
| Shade Variation           | V2 - Alabaster<br>V3 - Quartz & Feldspar |   |  |

note: Product specifications are subject to change. See Technical Data section on page 186 for details.



# NY2LA

2CM COLOR BODY PORCELAIN PAVERS

CONCRETE



**NY210U**

Malibu White



**NY220U**

Brentwood Beige



**NY230U**


Riverside Steel

## FIELD TILE FORMATS




24x24


## TRIMS



STEP TREAD  
**USTEPA**  
12x24



STEP TREAD  
WITH GROOVES &  
DRIP FLAP  
**USTEPD**  
12x24



STEP TREAD  
WITH BULLNOSE  
**USTEPB**  
12x24

mosaics not available





above: **NY220U 24x24** Brentwood Beige

| PORCELAIN TECHNICAL DATA  |                       |  |  |
|---------------------------|-----------------------|--|--|
| Country of Origin         | USA                   | Breaking Strength                          | ≥ 2800 lbf. avg.                                 |
| ANSI® A326.3 <sup>1</sup> | Exterior, Wet (EW)    | Water Absorption                           | ≤ 0.5% <sup>2</sup>                              |
| Recycled Content          | 40%                   | Edge                                       | Pressed  |
| Surface Hardness          | 7 Mohs                | Intended Use <sup>3</sup>                  | Residential, Light Commercial & Heavy Commercial |
| Thickness                 | 20mm                  | <sup>1</sup> See page 189 for more details |  |
| Shade Variation           | V2 - Slight Variation | <sup>2</sup> Average production value      |  |
|                           |                       | <sup>3</sup> See page 188 for more details |  |

note: Product specifications are subject to change. See Technical Data section on page 186 for details.





**PSG10U**  
Wander White



**PSG30U**  
Everywhere Greige




**PSG20U**  
Anywhere Beige




**PSG40U**  
Leisure Gray


## FIELD TILE FORMATS

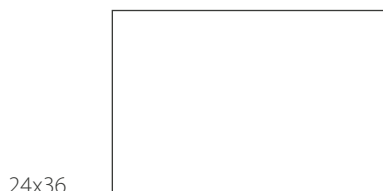


## TRIMS



STEP TREAD  
**USTEPA**  
12x24\*



STEP TREAD  
WITH GROOVES &  
DRIP FLAP  
**USTEPD**  
12x24\*



STEP TREAD  
WITH BULLNOSE  
**USTEPB**  
12x24\*

\*Special Order Only





above: **PSG40U 24x36** Leisure Gray

## PORCELAIN TECHNICAL DATA

|                                 |                         |  |  |
|---------------------------------|-------------------------|--|--|
| <b>Country of Origin</b>        | USA                     | <b>Breaking Strength</b>                   | ≥ 2800 lbf. avg.                                 |
| <b>ANSI® A326.3<sup>1</sup></b> | Exterior, Wet (EW)      | <b>Water Absorption</b>                    | ≤ 0.5% <sup>2</sup>                              |
| <b>Recycled Content</b>         | 40%                     | <b>Edge</b>                                | Rectified  |
| <b>Surface Hardness</b>         | 7 Mohs                  | <b>Intended Use<sup>3</sup></b>            | Residential, Light Commercial & Heavy Commercial |
| <b>Thickness</b>                | 20mm                    | <sup>1</sup> See page 189 for more details |  |
| <b>Shade Variation</b>          | V3 - Moderate Variation | <sup>2</sup> Average production value      |  |
|                                 |                         | <sup>3</sup> See page 188 for more details |  |

note: Product specifications are subject to change. See Technical Data section on page 186 for details.







**SPN01U**

Snow



**SPN13U**


Silver

## FIELD TILE FORMATS




24x24


## TRIMS



STEP TREAD  
**USTEPA**  
12x24



STEP TREAD  
WITH GROOVES &  
DRIP FLAP  
**USTEPD**  
12x24



STEP TREAD  
WITH BULLNOSE  
**USTEPB**  
12x24



above: **SPN13U 24x24 Silver**

| PORCELAIN TECHNICAL DATA  |                       |  |  |
|---------------------------|-----------------------|--|--|
| Country of Origin         | USA                   | Breaking Strength                          | ≥ 2800 lbf. avg.                                 |
| ANSI® A326.3 <sup>1</sup> | Exterior, Wet (EW)    | Water Absorption                           | ≤ 0.5% <sup>2</sup>                              |
| Recycled Content          | 40%                   | Edge                                       | Rectified  |
| Surface Hardness          | 7 Mohs                | Intended Use <sup>3</sup>                  | Residential, Light Commercial & Heavy Commercial |
| Thickness                 | 20mm                  | <sup>1</sup> See page 189 for more details |  |
| Shade Variation           | V2 - Slight Variation | <sup>2</sup> Average production value      |  |
|                           |                       | <sup>3</sup> See page 188 for more details |  |

note: Product specifications are subject to change. See Technical Data section on page 186 for details.



# FLORIDA TILE INTERNET SALES POLICY

## INTERNET SALES POLICY

Florida Tile products are sold only through a nationwide network of floor covering professionals, carefully chosen for their specialized knowledge and ability to help consumers make the best flooring decisions for their needs. In addition, authorized Florida Tile retailers can provide consumers with quality tile and stone samples, and the latest flooring technologies and design trends that can be seen in-person.

When purchasing flooring, we feel there is no substitute for personal, professional service, and installation. Flooring is a substantial investment, and we highly recommend that consumers purchase their flooring from a local Florida Tile dealer to get the best service both during and after the sale. For this reason, we prohibit the sale of Florida Tile products through internet resellers, and we actively pursue any individual or entity that attempts to misrepresent themselves as an approved online seller of Florida Tile products. Unauthorized use of Florida Tile images, trademarks and other protected intellectual property is strictly prohibited.

To find a trusted Florida Tile trade partner, dealer, or distributor near you, please visit the store locator at [www.floridatile.com](http://www.floridatile.com).

## WEB | SOCIAL



### SOCIAL

Connecting and sharing inspiration with Florida Tile has never been easier! Follow us on Facebook, Instagram, Pinterest, and LinkedIn. Subscribe to our YouTube channel to take a virtual tour of our Advanced Manufacturing Facility or watch informative videos on our latest products.

### WEB

Of course, the cornerstone resource for all Florida Tile product information is our website, [www.floridatile.com](http://www.floridatile.com). Here, you will always find the most up-to-date content and innovative online tools.


### TILE VISUALIZER

Use our photos or upload an image of your own interior space. An image mapping tool will recognize areas within an image where tile can be placed. It also allows you to manually create additional floor and/or wall areas for tile placement.



## DESIGN YOUR DREAM ROOM TODAY!

Scan to visit: <https://visualizer.floridatile.com/#>

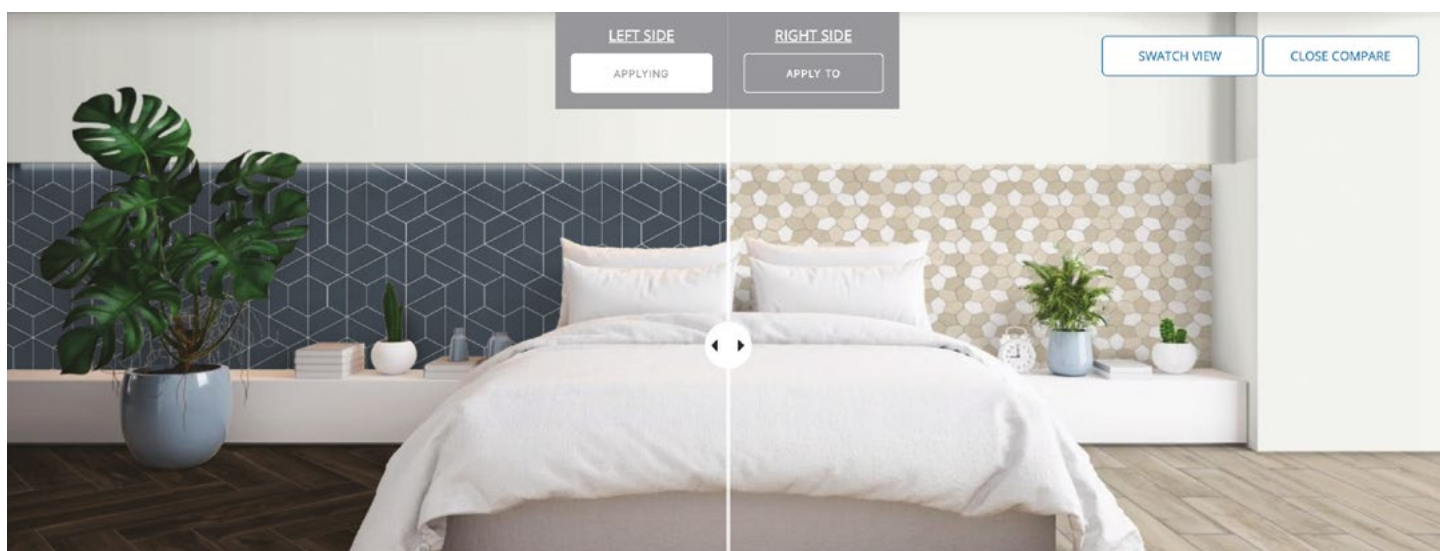



# ICON & REFERENCE GUIDE



## Made in USA

This logo indicates that the product line is manufactured in the United States, with the exception of select trim, decorative, and ceramic pieces. The source of origin of each of our products is indicated on the labels and/or packaging. For information about the origin of specific products or product lines, please refer to the label and/or packaging, or see your authorized Florida Tile retailer.



## HDP - HIGH DEFINITION PORCELAIN

This is an exclusive trademarked process by Florida Tile that utilizes the most technological advanced glazing system in the industry today, digital printing. Continuing to be an innovator in the industry, Florida Tile was the first manufacturer to use this technology in the United States.



## Green Squared®

The logo for Green Squared® involves one industry, one standard, and one mark and covers the gamut of products used in a tile installation. It was the first multi-attribute sustainability standard developed for tiles and tile installation materials. Green Squared® uses the transparency and consensus of the ANSI® process combined with third party certification to evaluate, validate, and communicate products which have a positive impact on the environment and society. Green Squared® covers product characteristics, manufacturing, end of product life management, progressive corporate governance, and innovation in an effort to establish sustainability criteria for products throughout their full life cycle.



## Porcelain Tile

This logo indicates that the product line has been tested and certified by the Porcelain Tile Certification Agency (PTCA) to meet the ANSI® A137.1 standard for a true porcelain tile. This means that the product line has a water absorption rate of 0.5% or less.



## GREENGUARD®

This logo indicates that this product has been tested and received GREENGUARD® Gold Certification (formerly known as GREENGUARD® Children & Schools Certification). GREENGUARD® offers strict certification criteria, considers safety factors to account for sensitive individuals (such as children and the elderly), and ensures that a product is acceptable for use in environments such as schools and healthcare facilities. It is referenced by both The Collaborative for High Performance Schools (CHPS) and the Leadership in Energy and Environmental Design (LEED®) Building Rating System.



## Recycled Content

This logo indicates that the product line contains some quantity of recycled content. In most cases, the percentage of recycled content is pre-consumer material. If the recycled logo is accompanied by a number inside the box, then it has been tested and determined that the product contains at least that percentage of recycled material.



## Rectified Tile

This logo indicates that some sizes in this collection are rectified. Rectified tiles have been mechanically cut to achieve edges that are more uniform, with less variation in size from tile to tile. One benefit of this process is allowing for more narrow grout joints.

# SUSTAINABILITY

## PANARIAgroup®

PANARIAgroup's mission statement is about growing and creating well-being in harmony with the people and the environment, with openness, passion, and love for our work. In order to achieve such targets, the Group aims to generate sustainable value for its employees and business partners while respecting society and the environment. The Group has a strong focus on research and innovation, and is resolute to satisfy the highest expectations in the fields of general well-being and of aesthetics, both for professional and private customers, in architecture and the construction industry



### Green Squared Certified®

Florida Tile was among the first to earn TCNA - Green Squared® certification. This multi-attribute sustainability standard is for tiles and tile installation materials. It uses the transparency and consensus of the ANSI® process combined with third party certification to evaluate, validate, and communicate products that have a positive impact on the environment and society.

Covered by the standard are environmental product characteristics, environmental product manufacturing, raw material extraction, end of product life management, progressive corporate governance, and innovation. All Florida Tile products manufactured in our Lawrenceburg, KY facility are Green Squared Certified®.



### BUREAU VERITAS

Since its foundation in 1828, the Bureau Veritas Group has consistently built recognized expertise, helping clients comply with standards and regulations relating to quality, health & safety, the environment and social responsibility.

The group's network of regional and local offices manages client relationships and delivers a comprehensive range of services including inspection, testing, auditing, certification, ship classification and related technical assistance, training, and outsourcing. When appropriate, Bureau Veritas also provides advisory services.

Large and small organizations, whether private or public, can rely on Bureau Veritas to support them in protecting their respective brands, assets, and business. They play a key role in both risk management and performance improvement.

Bureau Veritas deploys multidisciplinary skills from over 61,000 employees in over 1,300 offices and laboratories worldwide.



### mindful MATERIALS (mM)

Reinforcing our commitment to transparency and sustainability, Florida Tile, Inc. is a proud participant in the mindful MATERIALS Library.

mindful MATERIALS (mM) is a powerful building product database incorporating information on the human health and environmental impacts of products from leading manufacturers. It is vetted by experts and trusted industry-wide as a source for product transparency.

Today's market requires owners, developers, and designers to carefully consider the impacts that product content has on people and the planet throughout the product's life cycle.

For products to be incorporated in this program, manufacturers must provide individual product details as well as certifications and/or attributions. This allows building industry professionals to easily locate relevant transparency and sustainability attributes in categories such as: material ingredients, environmental profile, VOCs, material sourcing, social responsibility, etc.



## EPD

This declaration is an environmental product declaration (EPD) in accordance with ISO 14025. The Tile Council of North America (TCNA) has produced an environmental product declaration (EPD) to identify the various environmental impacts of ceramic tile over its life cycle. In addition to providing basic product definition and information about the basic material, the EPD identifies the origin of ceramic tile and lists building physics. The declaration also includes a description of the tile manufacturing process, indicates the steps of processing the material, explains in-use conditions, and offers life cycle assessment results and results from testing and verifications with respect to tile.



## Declare

Declare is an ingredients label for building products paired with an online database of healthy materials for building project specifications. It allows manufacturers of ecologically sound products to demonstrate market leadership in the growing movement toward product transparency and health in the built environment and provides them an expanded point of entry into the world's most groundbreaking sustainable building projects.



## HPD

A summary of product contents and results from screening individual chemical substances against HPD Priority Hazard Lists and the Green Screen for Safer Chemicals®.



# MICROBAN®

Microban® and Florida Tile have teamed up to provide antimicrobial protection for ceramic tiles. Florida Tile products are well known for their beauty, durability, and performance. The addition of Microban® built-in technology featuring silver provides a continuous level of protection from the growth of common damaging microbes.



## ABOUT MICROBAN®

Microban® International, Ltd. is a global technology company dedicated to enhancing high quality consumer, industrial, and medical products with branded built-in protection from microbial growth. Microban® is a registered trademark of Microban® Products Company.

The Microban® brand offers continuous and durable antimicrobial product protection, built-in during manufacturing to last for the useful life of the product. Microban® International is headquartered in North Carolina with operations in North America, South America, Europe, and Asia.

## WHY MICROBAN® PROTECTION?

Microban antimicrobial technology is built into the ceramic product and works to inhibit the growth of damaging bacteria on the surface of the tile for the useful life of the product. Antimicrobial product protection provides an added level of cleanliness and keeps the tile up to 99.9% cleaner than an untreated tile. Microban antimicrobial technology works actively to control bacterial growth on ceramic surfaces and works to keep the tile cleaner between cleanings.

## HOW CLEAN ARE YOUR TILES?

Micro-organisms are a fact of life. They are everywhere, all around us, all the time. However hard we try, there's no getting away from them. So it makes sense to do what we can to help prevent their potentially undesirable effects. Under the right conditions of warmth, a food source, time, and a little humidity, microbes can grow and divide extremely rapidly, and bacterial populations can double as quickly as every 20 minutes. In addition, microbes can persist on inert surfaces for a long time.

## ANTIMICROBIAL PROPERTIES OF MICROBAN ON PORCELAIN TILE:

- Active day and night, 24/7
- Active both in light and dark conditions, with no need to use UV lamps
- Active on the surface of the material
- Permanently integrated into the surface during industrial firing at a temperature of 1200°C (it is not a surface treatment applied after firing)
- Active over time, resistant to wear, lasting for the lifetime of the tiles, it is permanent and does not need to be re-treated over the lifecycle of the product

## Antimicrobial porcelain tiles are ideal for any environment, especially those that call for a high standard of cleanliness, such as:

- Hotels, restaurants, cafeterias
- Hospitals, operating rooms
- Wellness centers, spas, swimming pools, gyms
- Retirement homes, schools, nursery schools
- Agricultural and food industries
- Public areas, businesses, offices
- Residential kitchens and bathrooms

## P R ( ) T E C T

Protect is the exclusive antimicrobial technology by Panariagroup, resulting from a partnership with Microban, the world leader in the sector. This effective antimicrobial protection is incorporated into the ceramic tile to inhibit bacterial growth on the surface, keeping it 99.9% cleaner than an untreated surface.

# CONTINUING EDUCATION

## CEUs

To better inform and engage with Designers and Specifiers about the benefits of ceramic and porcelain tile, Florida Tile is pleased to provide these Continuing Education Courses:

- **Know Your Porcelain**
- **Outdoor Pavers**
- **Gauged Porcelain Tiles**
- **Tile is Green**

Florida Tile partners with CEU Events <http://www.ceuevents.com/> to provide accredited educational courses. This online collaboration platform allows an easy way to request, schedule, and promote CEU courses. This allows credits to be efficiently claimed online at the completion of the course



# CARE & MAINTENANCE

## ROUTINE CARE FOR YOUR TILE

Ceramic tile is one of the most durable and maintenance friendly surfaces you can choose for your walls, floors, countertops, etc. With proper care and minimum maintenance, tile will retain its original beauty and luster for many years. Generally, all that is necessary to keep your tile looking as good as new is a quick wipe with a clean damp cloth or mop. Prompt cleanup of spills and regular cleaning will keep your ceramic tile surfaces looking their best.

If a cleaner is necessary, Florida Tile recommends the use of low VOC (volatile organic compound), neutral pH, non-hazardous, and non-polluting products.

**Glazed tile walls** in your home will easily keep their lovely look with simple routine care—just wipe regularly with a clean damp cloth or sponge. A non-abrasive, neutral cleaner can be used (abrasive cleansers will cause scratching to shiny tile and polished marble surfaces).

**Highly polished tile and stone surfaces** should be polished dry with a soft absorbent cloth after cleaning to eliminate the buildup of hard water residue and to maintain the high-polished finish.

For **glazed tile floors**, sweep or vacuum regularly to remove dirt and gritty particles. Follow with a mop or sponge dampened with a neutral pH cleaner. If a cleaner is used, be sure the surface is rinsed thoroughly with clean water and dried. For **textured or uneven tile or stone surfaces**, substituting a soft scrub brush or white nylon scrub pad for the mop or sponge will quicken the cleaning process. **Unglazed tile floors** and **porcelain tile floors** can also be maintained in this same manner.

**Tiled surfaces in your bathroom** may require a more thorough routine cleaning because of a buildup of soap scum, body oils, or hard-water stains. Use a clean, damp cloth, or sponge with a neutral pH cleaner, allowing it to stand about five minutes before rinsing and drying. Specialty bathroom cleaners may also be used (always test first). Clean shower regularly with the appropriate tile and stone cleaner. Dry with a towel after each use and leave curtain or door open between showers to allow for maximum ventilation and moisture escape.

### List of Neutral Cleaners

| Manufacturer | Product                            |
|--------------|------------------------------------|
| OMNI®        | Concentrated Cleaner, Deep Cleaner |
| STONETECH®   | Stone & Tile Cleaner Revitalizer   |

## HEAVY DUTY CLEANING

For **high-traffic** areas or when tile has been neglected for a long time, heavy-duty cleaning may be required.

**Glazed walls and countertops** should be cleaned with an alkaline-based cleaner (high pH, non-acidic). Use a white nylon scrub pad, followed by a clean water rinse. Poultice may be used in combination with any appropriate cleaner, if needed, to restore seriously soiled areas. Poultice is a very fine powder that serves as a mild abrasive, yet cannot cause scratching to even the most delicate glazed tile and polished marble surfaces. **Unglazed tile and natural stone** can be treated in the same manner as glazed when heavy-duty cleaning is required. Once the tile or stone has been effectively restored and is dry, it is recommended that the appropriate sealer be applied to protect from staining and ease ongoing maintenance.

To clean **badly soiled countertops**, an appropriate alkaline cleaner is recommended. Poultice can be lightly sprinkled onto the wet cleaner solution and scrubbed with a white nylon scrub pad or medium nylon scrub brush to facilitate cleaning. Rinse thoroughly. For **glazed tile floors**, the same products and procedures are recommended.

For **showers, tub surrounds, or other wet areas**, light acidic cleaners are recommended to remove hard water mineral deposits. These acidic cleaners are not recommended on acid-sensitive surfaces such as metallic glazes or marble. For **acid-sensitive surfaces**, a neutral or alkaline cleaner, used in combination with Poultice is recommended. Never use harsh acids such as hydrochloric (muriatic) or hydrofluoric, as these acids, and even the acid fumes, can cause damage to tile, stone, grout, humans and pets! The accepted acids (use sparingly) for homeowners use are mild citric, sulfamic, and phosphoric. Always test first for desired results.

## DO'S & DON'TS

- Do regularly apply a water based penetrating sealer on all natural stone products
- Always do a small test with sealers & cleaners to ensure desired results
- Do use a sealer on grout joints; except for 100% solid epoxy grout
- Do use only non-abrasive cleaning compound or formula that is recommended for both glass and tile when cleaning glass tile
- Do see your nearest Florida Tile Dealer or Distributor for advice on special cleaning problems or if you have any questions
- Do read and follow label directions for all cleaners and sealers
- Don't combine ammonia and household bleaches
- Don't use harsh cleaning agents such as steel wool pads or strong acids, which can scratch or damage the surface of your tile
- Don't use a cleaning agent that contains color on unglazed tile, natural stone, or white grout, as these porous surfaces may absorb the color



## MURALS, RESINS, GLASS, CAST STONE FIXTURES & METALS

Wipe clean with a damp cloth or sponge using a neutral, non-abrasive cleanser. Be sure any cleaner residue is removed with a clean water

rinse. Clean with alkaline tile cleaner or all-purpose cleaner using a soft cloth. Rinse with clean water and dry with a soft towel. Cast Stone Fixtures and Cast Decors are pre-sealed in manufacturing with water based, liquid silicone rubber dispersed sealer. For re-sealing,

the sealing product should also be the same type as the previous sealer for best penetration. For more detailed information on glass tile installation and maintenance, visit [www.floridatile.com](http://www.floridatile.com) or review the TCNA (Tile Council of North America) Handbook Guidelines.

| Type of Contaminate                      | Type of cleaner          | Name of cleaner                                      | Manufacturer |
|--|--------------------------|--|--------------|
| Coffee, soft drinks, fruit juice         | Alkaline-based cleaner   | Deep Cleaner, Heavy Duty Cleaner, Elite Cleaner      | OMNI®        |
|  |                          | KlenzAll™  | STONETECH®   |
| Grease, dirt from traffic, deep-cleaning | Alkaline-based cleaner   | Deep Cleaner, Heavy Duty Cleaner, Elite Cleaner      | OMNI®        |
|  |                          | KlenzAll™  | STONETECH®   |
| Wine                                     | Oxidizing cleaner        | Poultice Stain Remover                               | OMNI®        |
| Hard water spots                         | Acid-based cleaner       | Restore™   | STONETECH®   |
|  |                          | Buffered Acid Cleaner, Sulfamic Acid Cleaner         | OMNI®        |
| Rust                                     | Acid-based cleaner       | Buffered Acid Cleaner, Sulfamic Acid Cleaner         | OMNI®        |
|  |                          | Poultice Stain Remover (non-acid)                    | OMNI®        |
|  |                          | Restore™   | STONETECH®   |
| Tire, pencil, metal marks                | Abrasive paste           | Elite Cleaner, Poultice Stain Remover (non-acid)     | OMNI®        |
| Ink, marker                              | Solvent-based cleaner    | Epoxy Grout Haze Remover & Coating Stripper          | STONETECH®   |
|  |                          | Sealer Remover, Poultice Stain Remover (non-solvent) | OMNI®        |
| Dirty grout                              | Grout cleaner            | DeepKlenz™   | STONETECH®   |
|  |                          | Back-To-New Grout Cleaner, Deep Cleaner              | OMNI®        |
|  |                          | Concentrated Cleaner, Heavy Duty Cleaner             | OMNI®        |
| Any                                      | Neutral wax-free cleaner | Stone & Tile Cleaner                                 | STONETECH®   |
|  |                          | Concentrate Cleaner, Deep Cleaner                    | OMNI®        |

# TECHNICAL DATA

## ACID RESISTANCE

ASTM® C-650 is the standard test method for determining resistance of ceramic tile to chemical substances. The glazed surface of Florida Tile products is resistant to virtually all caustic and corrosive liquids. Typical exceptions are fluorides and concentrated hydrochloric acid.

## BREAK STRENGTH

ASTM® C-648 describes the standard test method for determining structural strength of ceramic tile. This test provides a means for establishing whether or not ceramic tile meets the strength requirements which may be required for a specific installation procedure, and its ability to withstand load and impact. The ANSI® standard requires an average breaking strength of 125 lbf. for wall tiles and 250 lbf. for floor tiles. Tiles installed on floors with adhesives may require higher breaking strengths.

## CALIBERS

Tiles shrink during firing. To accommodate this shrinkage, we measure each tile as it comes down the line and assign it a caliber based on ANSI® requirements for size variation. Tiles with different calibers should be compared prior to installation to make sure they will work well together. A wider grout joint will help accommodate the size difference within and between calibers.

## DYNAMIC COEFFICIENT OF FRICTION

Sometimes called kinetic coefficient of friction. This is the ratio of the force necessary to keep a surface already in motion sliding over another surface divided by the weight (or normal force) of the sliding object. \*Different contaminants such as dirt, water, soap, oil, or grease can change this value.

## FROST RESISTANCE

ASTM® C-1026 describes the standard test method for determining ceramic tile's ability to withstand repeated cycles of freezing and thawing. It determines the ability of tile to resist damage or deterioration when tested in freezing and thawing situations such as those found in central and northern sections of the United States.

## INSTALLATION

Florida Tile recommends that all installations of its product comply with applicable parts of ANSI® A-108 series for ceramic tile installation. For any information, including technical questions related to the underlayment, use of setting materials, or other installation related questions, contact the Tile Council of North America. You can reach them at [techinfo@tile-usa.com](mailto:techinfo@tile-usa.com) or you can view the TCNA Installation Handbook at <https://www.tcnatile.com/products-and-services/publications.html>

- Use a grout joint that is at minimum 3 times the variation of the tile as per ANSI® A108.02 Section 4.3.8 Grout Joint Size: In the case of Florida Tile, all rectified product shall have, on average, no less than a 1/8 in. grout joint.
- Minimize the variation in the substrate in order to accommodate the above minimal grout joint as per ANSI® A108/A118/A136.1 - American National Specifications for the Installation of Ceramic Tile, specifically A108.01 Section 2.6.2.2 and similarly in A108.02 Section 4.1.4.3.1.

## GAUGED PORCELAIN TILE PANELS (GPTP)

Also known as large panel porcelain slabs, thin porcelain tile, or large format porcelain slabs, gauged porcelain is known for its beauty, durability, ease of maintenance, and its lack of grout joints. GPT has been defined as tiles that measure 1 x 1 meter (~36 x 36 inches) or smaller, while GTPP are equal to or larger than 1 x 1 meter. Tile Council North America (TCNA) recognizes two classes of gauged tile products are defined — those for wall applications, from 3.5 to 4.9 mm in thickness, and those for floor applications, from 5 to 6.5 mm in thickness.

## MOH'S HARDNESS

Scratch resistance of glazes is measured by scratching the glaze with a mineral of known hardness. Hardness of minerals is classified by Moh's Scale, which lists 10 minerals according to their hardness. Each mineral in this scale will scratch those with lower numbers in the scale, but will not scratch minerals with higher numbers. Talc is classified as number one on the Moh's Scales and diamond ten. Resilient flooring materials, such as vinyl and asphalt tile, are relatively soft and can be scratched by talc, number one on the scale. White polished marble can be scratched by calcite, which is number three. Black marble rates a four and can be scratched by fluorite. Most glazes used on ceramic tile fall in the five to six range, which is also slightly harder than most steels. Case-hardened steel, such as what is used in drill bits used for drilling holes in steel, is approximately six and will scratch most glazes. Some glazes used on ceramic tiles designed for floor use cannot be scratched by a case-hardened drill bit. Quartz, number 7 on Moh's Scale, will scratch most glazes and all but the hardest unglazed ceramic tiles. Sand is a common example of natural quartz.

## OUTDOOR INSTALLATIONS

Porcelain tile is appropriate for exterior wall (vertical) installations. Horizontal applications require additional considerations such as if the area will be covered or exposed to the elements. Only tile with a Product Use Classification of "Exterior, Wet" should be used in outdoor installations. Any hard surface flooring will be slippery when covered in standing water, ice, grease, or leaves. Regular cleaning, maintenance, and inspection of the surface is critical to a successful outdoor tile installation.

RECTIFIED TILE

Rectification is a process of ceramic tile manufacturing in which all sides of a tile are cut with specialized machines. This creates a ceramic tile with perfectly square edges and reduces size variation between tiles, essentially creating a mono-caliber product. This has a practical application in uniformity and ease of installation, but it also has an aesthetic benefit. By allowing a reduced grout joint (within ANSI® requirements) the installation is better suited to more contemporary tastes, and stays cleaner with less grout.

RUNNING BOND/BRICK JOINT PATTERNS

Grout Joints- For running bond/brick joint patterns utilizing tiles (square or rectangle) with any size greater than 15 in. the grout shall be, on average, a minimum of 1/8 in. wide for rectified tile and, on average, a minimum of 3/16 in. wide for calibrated (non-rectified) tiles.

Offset- For running bond/brick joint patterns utilizing tiles (square or rectangular) where the side being offset is greater than 15 in. (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.

SHADES

Florida Tile assigns all of our tiles a shade based on comparison to a target piece. We also add a ‘lot letter’ (commonly referred to as the ‘dye lot’) that differentiates tiles from different runs. Tiles with different shades should be compared prior to installation to make sure they are a good match and should be well mixed during installation.


SHADE BLENDING

Designed to simulate a natural surface by using a combination of ceramic/porcelain processes, shade and texture variations are inherent in these nature-inspired products. These types of tiles are packed by shade blends and not specific shades. Products of a common shade blend type may be used together. Specific product lots are identified by the last letter of the shade code.


TECHNICAL SPECIFICATION

Tiles manufactured by Florida Tile, Inc. and marked standard grade meet or exceed the recommended standard specification for ceramic tile, ANSI® A137.1. All products are formulated using high-quality clays specifically designed for density and strength, then pressed, glazed and fired. Note that the data represented in this literature represents typical test results of randomly selected “standard” products.


SHADE VARIATION




**V1 Uniform Appearance**  
Differences among pieces from the same production run are minimal.



**V2 Slight Variation**  
Clearly distinguishable differences in texture and/or pattern with similar colors.



**V3 Moderate Variation**  
While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece may vary significantly. For example “that little bit of color” on one piece of tile may be the primary color on the next piece.



**V4 Random Variation**  
Random color differences from tile to tile, so that one tile may have totally different colors from that on other tiles. Thus, the final installation will be unique.

PLEASE NOTE:

- Not all flooring products are suitable for wet areas, specialized applications or commercial use. Please refer to the American National Standard Specifications for Ceramic Tile (ANSI® A137.1) for ceramic, stone, and glass installation for specific usage and installation information.
- In order to provide as many size formats as possible, some sizes may be originally pressed as larger formats and then professionally cut to size.
- Country of origin and other product features and characteristics are subject to change due to manufacturing efficiencies and other factors. See retailer or product packaging to verify country of origin and other product characteristics.



# INTENDED USE

## GENERAL USAGE GUIDELINES

The following General Usage Guidelines highlight those floor application types that we generally consider to be appropriate for designated product lines. However, every installation is unique and requires careful consideration of the specific requirements for that particular project. For specific determinations as to the suitability of specific products for your application, please consult an experienced tile installer, design professional, or the TCNA handbook. Ultimately it is the responsibility of the project manager to choose the most appropriate product for each project based on need and traffic. Not all projects are the same.

## RESIDENTIAL

Products designated as “Residential” are generally considered appropriate for use in residential (non-commercial) floor areas that are subject to normal foot traffic, including kitchens, bathrooms, living areas, and other residential environments. In heavy-traffic areas, products with GLOSSY/POLISHED/TOUCH finishes are not recommended.

## LIGHT COMMERCIAL

Products designated as “Light Commercial” are generally considered appropriate for use in commercial floor areas that are subject to considerable foot traffic greater than residential applications, including offices, waiting rooms, retail shops, public bathrooms, apartment building common areas, restaurant dining rooms, car showrooms, bars, cinemas, medical clinics, hotel guest rooms and bathrooms. In heavy-traffic areas, products with GLOSSY/POLISHED/TOUCH finishes are not recommended.

## HEAVY COMMERCIAL

Products designated as “Heavy Commercial” are generally considered appropriate for use in commercial floor areas that are subject to extensive foot traffic, including shopping center common areas, hotel lobbies, fast food restaurants, dance clubs, hospitals, schools, museums, houses of worship, airports, train and bus stations, and other interior applications where heavy traffic is anticipated.

## NOTES

- These are general use guidelines only and are no substitute for competent, professional architectural and design input specific to each project. For example, a product classified as Light Commercial might be suitable for use in some areas of a regional airport with moderate foot traffic, while even a Heavy Commercial product may be subject to premature wear and tear if used in a heavy-traffic industrial area where regular cleaning and maintenance are not performed.
- The occasional presence of minor color variation, spots, or other small imperfections is considered a characteristic of the material and of its unique manufacturing process.
- If product is installed in direct contact with external environments, use of protective solutions, a protective mat, or other anti-scratch alternatives may be necessary to reduce the formation of scratches.
- Use of low thickness products is not recommended in areas subject to heavy loads.
- GLOSSY/POLISHED/TOUCH finishes are recommended for wall cladding, as well as for flooring in Residential or Light Commercial areas that are not subject to heavy traffic, and where an anti-slip performance (DCOF) is not required.



# PRODUCT USE CLASSIFICATIONS

## ANSI A326.3

**ANSI A326.3** (American National Standard Test Method for Measuring Dynamic Coefficient of Friction of Hard Surface Flooring Materials) features a five-category product use classification system that allows manufacturers to communicate areas for possible use based on the slip resistance characteristics of their products.

The five product use categories are as follows:

| Classification     | Reference Category | Criteria   |
|--------------------|--------------------|--|
| Interior, Dry      | ID                 | ≥ 0.42 dry DCOF<br>(Per Section 10.1)  |
| Interior, Wet      | IW                 | ≥ 0.42 wet DCOF<br>(Per Section 9.1) or<br>Manufacturer-Declared                             |
| Interior, Wet Plus | IW+                | Manufacturer-Declared<br>Standards > ANSI A326.3<br>generally<br>accepted minimum conditions |
| Exterior, Wet      | EW                 | Manufacturer-Declared<br>Standards > ANSI A326.3<br>generally<br>accepted minimum conditions |
| Oils/Greases       | O/G                | Manufacturer-Declared<br>Standards > ANSI A326.3<br>generally<br>accepted minimum conditions |

According to the standard, hard surface flooring products shall be classified into one or more of the categories. Additionally, the standard provides informative notes for each category that state generally accepted minimum conditions.

To review the complete ANSI A326.3 standards and FAQs please visit <https://www.floridatile.com/productuseclassifications>.

Florida Tile's declared use classifications can be found on the bottom of each collection page in the Technical Specifications section as well as on each collection's Technical Sheet, downloadable from <https://www.floridatile.com/downloads/>.

# WARRANTY

**Florida Tile, Inc. ("Florida Tile") makes the following limited warranty with respect to its products:**

## FLORIDA TILE PRODUCTS

Florida Tile warrants Florida Tile branded tile products and all other products manufactured by Florida Tile ("Florida Tile Products") to meet or exceed the applicable requirements of American National Specifications Institute, Specification ANSI A137.1-2022. Florida Tile further warrants Florida Tile Products to conform to any specific physical properties stated in Florida Tile's then-current product literature, and to be reasonably free from manufacturing defects.

## RESIDENTIAL LIFETIME WARRANTY

The warranty set forth above for Florida Tile Products installed in a residence will remain in effect for as long as the original purchaser owns his or her home and is non-transferable.

## COMMERCIAL WARRANTY

Florida Tile defines a commercial installation as any structure other than a dwelling occupied by the owner of the tile. The warranty set forth above for Florida Tile Products installed in a commercial installation will extend for a period of 18 months from the date of shipment of the product.

## THIRD PARTY PRODUCTS

Any and all products sold by Florida Tile other than Florida Tile Products as defined above ("Third Party Products") shall be sold subject to the manufacturer's express warranties. Florida Tile makes no other warranty with respect to Third Party Products.

## WARRANTY LIMITATIONS

The warranty set forth above is Florida Tile's sole and exclusive warranty, and Florida Tile expressly disclaims any and all other warranties, express or implied, including without limitation any warranty of merchantability or fitness for a particular purpose. Florida Tile will provide replacement tile or refund the purchase price at Florida Tile's sole discretion if any Florida Tile Product fails to meet the limited warranty set forth above, which shall be Purchaser's exclusive remedy. Under no circumstances shall Florida Tile be liable for any special, indirect, incidental or consequential damages, including without limitation labor costs for removal of existing product and installation of replacement product. This warranty is void with respect to any Florida Tile Products that are not installed in a workmanlike manner and in accordance with all applicable standards and installation instructions. Purchaser shall be solely responsible for ensuring compatibility of any and all products or materials utilized in connection with the installation of Florida Tile Products. Shade match of the replacement product to that being replaced cannot be guaranteed. No installer, dealer, agent, or employee of Florida Tile has the authority to modify the obligations or limitations of this warranty.

This limited warranty gives specific legal rights. Since some states have laws governing consumer rights and damages, some of the above limitations may not apply to you, and you may have other rights which vary from state to state. Except for these other rights, the remedy provided under these warranties state the limit of Florida Tile's responsibilities.



# SAMPLE ORDERING

## FLORIDA TILE IS A BRAND PARTNER WITH MATERIAL BANK!



Material Bank is an online resource for architects and designers to quickly search and compare materials and order samples that will be delivered overnight. It is the fastest and most powerful way to search and sustainably sample materials, discover new products, and turn hours of work into minutes.

## Overnight sample delivery



**Order Florida Tile samples by midnight (ET) and everything delivers in a single box by 10:30 AM the next morning. All orders are shipped via FedEx Priority Overnight at no cost.**

It also provides powerful design and organization tools to help you work faster, smarter, and more collaboratively.

- **Digital Vision Boards** to save, organize, and share material swatches.
- **Detailed Product Information** like performance insights, technical data, and brand collateral.
- **'Ask an Expert' Service** provides access to trained professionals that help find the exact materials/products needed.
- **Rep Directory** allows design professionals to identify and directly contact their Florida Tile Sales Representative.
- **Brand Page** easily displays materials relevant to your search
- **Order History** organizes sample order details for easy reordering and direct contact with a Florida Tile Sales Representative for project pricing and questions.

# PANARIAgroup®

To excel in the world of luxury ceramics means knowing how to continuously create highly technological products and how to enhance them through the utmost attention to aesthetics and detail.

Panariagroup Industrie Ceramiche S.p.A. is a multinational Italian group and worldwide leader in the production and distribution of ceramic floor and wall tiles. With almost 2,000 employees, more than 10,000 customers, 8 production plants (3 in Italy, 3 in Portugal, 1 in Germany and 1 in the USA) and an extensive sales network in over 130 countries, Panariagroup is one of the largest producers of ceramic tile.

Specialized in the production of porcelain and laminated stoneware, the group has focused on the top level and premium segments of the market by means of 14 brands (Panaria Ceramica, Lea Ceramiche, Cotto D'Este, Blustyle and Maxa in Italy, Margres, Love Tiles and Gresart in Portugal, Steuler Design, Grohn, Kerateam, and Nordceram in Germany, Florida Tile in the United States and Bellissimo in India). These brands fulfill the needs of diverse customers that share the same concern for the aesthetic and technical quality of products for residential, commercial and public architecture.

Always at the vanguard when it comes to joining beauty, quality, and

sustainability, Panariagroup maintains a thorough commitment towards reducing the environmental impact of its manufacturing facilities, thus displaying its focus on safeguarding the ecosystem while offering the highest quality. This is a vital commitment for those who, like Panariagroup, create products that millions of people all around the world encounter in their daily life, at home, or in public places.

The Group has a strong focus on research and innovation and is resolute to satisfy the highest expectations in the fields of general well-being and aesthetics, both for professional and private customers, in architecture, or in the construction industry. To excel in this world of luxury ceramics and to satisfy the demands of this exacting market segment, Panariagroup adheres to the highest standards of excellence, combining its history of artisan craftsmanship, technological expertise, and dedication to sustainability.

Panariagroup has a commitment to transparency and sustainability, publishing a yearly third-party verified sustainability report.



# One Group. One Vision.

Panariagroup USA, is the American business unit of Panariagroup Industrie Ceramiche S.p.A., a world leader in producing and distributing high-quality and prestigious ceramic surfaces.

At the forefront of design, production, and distribution of beautiful porcelain and ceramic products, Panariagroup USA features a broad array of unique and highly regarded brands: Florida Tile, Panaria Ceramica, Cotto d'Este, Lea, Love Tiles, Margres, Gresart, Maxa, and Bellissimo.

Panariagroup has always adhered to the highest standards of excellence, combining its history of skillful artisan craftsmanship with cutting edge technology. These brands fulfill the needs of diverse customers who share the same passion for the aesthetic and technical quality of products.

**PANARIA**group®  
U.S.A. Inc.

floridatile

**Panaria**  
ceramica

**COTTOD'ESTE**  
EXCLUSIVE SURFACES

**LEA**  
CERAMICHE

**LOVE**  
CERAMIC TILES

**MARGRES**  
CERAMIC STYLE

**GRESART.**  
CERAMIC TILES

**MAXA**  
CERAMIC SLABS

**Bellissimo**  
STILE ITALIANO



# BRANCH LOCATIONS

## COLORADO

### DENVER

12330 E 46th Avenue #200  
Denver, CO 80239  
303.744.2433

### FT. COLLINS

5001 S College Avenue Unit B  
Ft. Collins, CO 80525  
970.223.5193

## FLORIDA

### LAKELAND

3545 Reynolds Road  
Lakeland, FL 33803  
863.665.4646

### MIAMI

3075 NW 79th Avenue  
Doral, FL 33122  
305.513.9600

### PENSACOLA

4200 N Palafox Street  
Pensacola, FL 32505  
850.434.1120

### TALLAHASSEE

738 Capital Circle NE  
Tallahassee, FL 32301  
850.216.1300

## GEORGIA

### ATLANTA

1455 Oakbrook Drive, Suite 100  
Norcross, GA 30093  
770.769.1760

## IDAHO

### BOISE

2965 S Featherly Way  
Boise, ID 83709  
208.362.5160

## KENTUCKY

### ERLANGER

1325 Donaldson Hwy, Suite 2B  
Erlanger, KY 41018  
859.282.5400

## NORTH CAROLINA

### CHARLOTTE

605 Phillips Davis Drive, Suite 10  
Charlotte, NC 28217  
704.523.7615

### GREENSBORO

4500 Green Point Drive, Suite 106  
Greensboro, NC 27410  
336.851.2622

### RALEIGH

300 Dominion Drive, Suite 250  
Morrisville, NC 27560  
919.481.0172

### WILMINGTON

6500 Windmill Way A1  
Wilmington, NC 28405  
910.392.3072

## OHIO

### CINCINNATI

10840 Millington Court  
Cincinnati, OH 45242  
513.891.1122

### COLUMBUS

7029 Huntley Road  
Columbus, OH 43229  
614.436.2511

### DAYTON

1952 Byers Road  
Miamisburg, OH 45342  
937.293.5151

## OREGON

### EUGENE

1939 W 2nd Avenue, Unit B5  
Eugene, OR 97402  
541.334.3602

### PORTLAND

3259 NW Yeon Avenue, Bldg. F  
Portland, OR 97210  
503.226.6077

## TEXAS

### DALLAS

9755 Clifford Drive, Unit 190  
Dallas, TX 75220  
214.366.0845

## UTAH

### SALT LAKE CITY

2181 West California Avenue,  
Suite 400  
Salt Lake City, UT 84104  
801.906.4020

## VIRGINIA

### CHESAPEAKE

500 Woodlake Circle, Suite B  
Chesapeake, VA 23320  
757.855.9330

## WASHINGTON

### SEATTLE

20216 87th Avenue South  
Kent, WA 98031  
206.767.9819

## DISTRIBUTORS & AUTHORIZED DEALERS

Visit [www.floridatile.com/store-locator/](http://www.floridatile.com/store-locator/) for a full list of locations.